


NYLON-FULLY INSULATED DOUBLE CRIMP FEMALE DISCONNECTORS

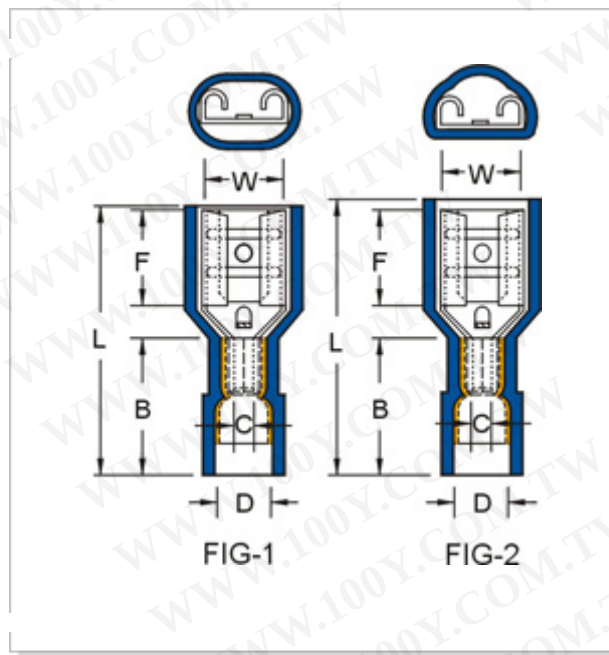

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

MAXIMUM ELECTRIC CURRENT:

A. W. G.	22	20	18	16	14	12	10
AMP.	3	4	7	10	15	20	24

MAXIMUM ELECTRICAL RATING: 105° C 600 VOLTS MAX.

INSULATION MATERIAL: NYLON

INSULATION COLOR:

22-16A. W. G. : RED 16-14A. W. G. : BLUE

12-10A. W. G. : YELLOW

DOUBLE CRIMP: WITH COPPER SLEEVE ON BARREL

TERMINAL MATERIAL: BRASS

TERMINAL BARREL I. D:

22-16A. W. G. : C=1.7mm 16-14A. W. G. : C=2.3mm 12-10A. W. G. : C=3.4mm

WIRE RANGE A. W. G. mm ²	ITEM NO.	NEMA TAB	DIMENSION inch (mm)						FIG	Q' TY BOX
			W	F	L	B	D	T		
22-16 A. W. G. 0.5-1.5 mm ²	 FDFNYD1-110 (5)	.020X.110 (0.5X2.8)	0.126 3.2	0.256 6.5	0.768 19.5	0.433 11	0.157 4.000	0.012 0.3	1	1000
	 FDFNYD1-110 (8)	.032X.110 (0.8X2.8)	0.126 3.2	0.256 6.5	0.768 19.5	0.433 11	0.157 4.000	0.012 0.3	1	1000
	 FDFNYD1-187 (5)	.020X.187 (0.5X4.75)	0.197 5	0.252 6.4	0.795 20.2	0.433 11	0.157 4.000	0.014 0.35	2	1000
	 FDFNYD1-187 (8)	.032X.187 (0.8X4.75)	0.197 5	0.252 6.4	0.795 20.2	0.433 11	0.157 4.000	0.014 0.35	2	1000
	 FDFNYD1-250	.032X.250 (0.8X6.35)	0.26 6.6	0.295 7.5	0.846 21.5	0.433 11	0.157 4.000	0.016 0.4	1	1000
16-14 A. W. G. 1.5-2.5 mm ²	 FDFNYD2-187 (5)	.020X.187 (0.5X4.75)	0.197 5	0.252 6.4	0.795 20.2	0.433 11	0.197 5.000	0.014 0.35	2	1000
	 FDFNYD2-187 (8)	.032X.187 (0.8X4.75)	0.197 5	0.252 6.4	0.795 20.2	0.433 11	0.197 5.000	0.014 0.35	2	1000
	 FDFNYD2-250	.032X.250 (0.8X6.35)	0.26 6.6	0.295 7.5	0.846 21.5	0.433 11	0.197 5.000	0.016 0.4	1	1000
12-10 A. W. G. 4-6 mm ²	 FDFNYD5-250	.032X.250 (0.8X6.35)	0.26 6.6	0.295 7.5	0.953 24.2	0.512 13	0.256 6.500	0.016 0.4	2	500