


NON-INSULATED RING TERMINALS

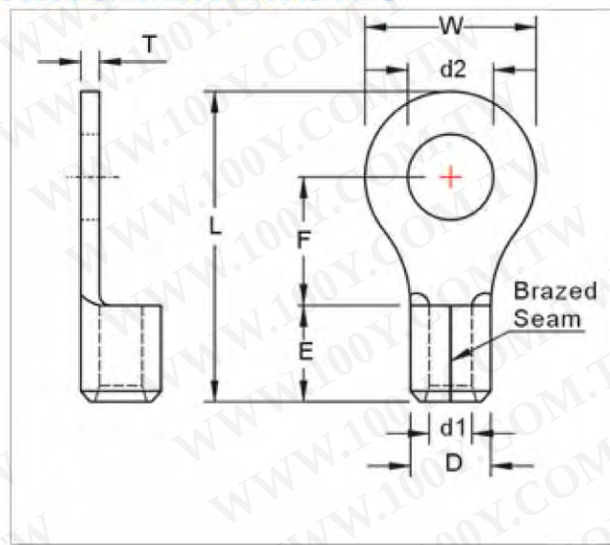

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

MAXIMUM ELECTRIC CURRENT:

A.W. G.	22	20	18	16	14	12	10	8	6	4	2	1/0	2/0	3/0	4/0	250	300	350	400	500	600
AMP.	9	12	17	18	30	35	50	70	95	125	170	230	265	310	360	405	445	505	545	620	690

TERMINAL MATERIAL: COPPER

WIRE RANGE A.W.G. mm ²	ITEM NO.		STUD SIZE		DIMENSION inch(mm)							Q'TY BOX
	BRAZED SEAM	BUTTED SEAM	2 x d2	W	F	L	E	D	d1	T		
8	☐ RNBL8-5	☐	#10	0.209 5.3	0.591 15	0.543 13.8	1.173 29.8	0.335 8.5	0.283 7.200	0.177 4.5	0.047 1.2	500
	☐ RNBS8-6	☐	1/4	0.252 6.4	0.472 12	0.366 9.3	0.917 23.3	0.335 8.5	0.283 7.200	0.177 4.5	0.047 1.2	500
	☐ RNBL8-6	☐	1/4	0.252 6.4	0.591 15	0.535 13.6	1.15 29.2	0.335 8.5	0.283 7.200	0.177 4.5	0.047 1.2	500
	☐ RNBS8-8	☐	5/16	0.331 8.4	0.591 15	0.535 13.6	1.15 29.2	0.335 8.5	0.283 7.200	0.177 4.5	0.047 1.2	500
	☐ RNBS8-10	☐	3/8	0.413 10.5	0.591 15	0.535 13.6	1.15 29.2	0.335 8.5	0.283 7.200	0.177 4.5	0.047 1.2	500

A.W.G.

8
mm²

☐ RNB8-11	☐	7/16	0.453 11.5	0.787 20	0.602 15.3	1.319 33.5	0.335 8.5	0.283 7.200	0.177 4.5	0.47 1.2	500
☐ RNB8-12	☐	1/2	0.512 13	0.787 20	0.591 15	1.319 33.5	0.335 8.5	0.283 7.200	0.177 4.5	0.047 1.2	500
☐ RNB8-14	☐	9/16	0.591 15	1.244 31.6	1.008 25.6	1.949 49.5	0.335 8.5	0.283 7.200	0.177 4.5	0.047 1.2	500
☐ RNB8-16	☐	5/8	0.669 17	1.244 31.6	1.008 25.6	1.949 49.5	0.335 8.5	0.283 7.200	0.177 4.5	0.047 1.2	500
☐ RNB8-18	☐	11/16	0.748 19	1.244 31.6	1.008 25.6	1.949 49.5	0.335 8.5	0.283 7.200	0.177 4.5	0.047 1.2	500
☐ RNB8-20	☐	3/4	0.827 21	1.244 31.6	1.008 25.6	1.949 49.5	0.335 8.5	0.283 7.200	0.177 4.5	0.047 1.2	500
☐ RNB8-22	☐	7/8	0.906 23	1.244 31.6	1.008 25.6	1.949 49.5	0.335 8.5	0.283 7.200	0.177 4.5	0.47 1.2	500

6
A.W.G.14
mm²

☐ RNB14-4	☐	#8	0.169 4.3	0.472 12	0.524 13.3	1.15 29.2	0.413 10.5	0.354 9.000	0.228 5.8	0.059 1.5	500
☐ RNBS14-5	☐	#10	0.209 5.3	0.374 9.5	0.524 13.3	1.11 28.2	0.413 10.5	0.354 9.000	0.228 5.8	0.059 1.5	500
☐ RNB14-5	☐	#10	0.209 5.3	0.472 12	0.524 13.3	1.15 29.2	0.413 10.5	0.354 9.000	0.228 5.8	0.059 1.5	500
☐ RNBSS14-6 NEW	☐	1/4	0.252 6.4	0.374 9.5	0.524 13.3	1.11 28.2	0.413 10.5	0.354 9.000	0.228 5.8	0.059 1.5	500
☐ RNBS14-6	☐	1/4	0.252 6.4	0.472 12	0.524 13.3	1.15 29.2	0.413 10.5	0.354 9.000	0.228 5.8	0.059 1.5	500
☐ RNBL14-6	☐	1/4	0.252 6.4	0.63 16	0.559 14.2	1.28 32.5	0.413 10.5	0.354 9.000	0.228 5.8	0.059 1.5	500
☐ RNB14-8	☐	5/16	0.331 8.4	0.63 16	0.559 14.2	1.28 32.5	0.413 10.5	0.354 9.000	0.228 5.8	0.059 1.5	500
☐ RNB14-10	☐	3/8	0.413 10.5	0.63 16	0.559 14.2	1.28 32.5	0.413 10.5	0.354 9.000	0.228 5.8	0.059 1.5	500
☐ RNB14-11	☐	7/16	0.453 11.5	0.866 22	0.78 19.8	1.614 41	0.413 10.5	0.354 9.000	0.228 5.8	0.059 1.5	250
☐ RNB14-12	☐	1/2	0.512 13	0.866 22	0.78 19.8	1.614 41	0.413 10.5	0.354 9.000	0.228 5.8	0.059 1.5	250
☐ RNB14-14	☐	9/16	0.591 15	1.244 31.6	0.996 25.3	2.008 51	0.413 10.5	0.354 9.000	0.228 5.8	0.059 1.5	250
☐ RNB14-16	☐	5/8	0.669 17	1.244 31.6	0.996 25.3	2.008 51	0.413 10.5	0.354 9.000	0.228 5.8	0.059 1.5	250
☐ RNB14-18	☐	11/16	0.748 19	1.244 31.6	0.996 25.3	2.008 51	0.413 10.5	0.354 9.000	0.228 5.8	0.059 1.5	250
☐ RNB14-20	☐	3/4	0.827 21	1.244 31.6	0.996 25.3	2.008 51	0.413 10.5	0.354 9.000	0.228 5.8	0.059 1.5	250
☐ RNBS22-8	☐	5/16	0.331 8.4	0.48 12.2	0.602 15.3	1.307 33.2	0.472 12	0.453 11.500	0.303 7.7	0.067 1.7	250
☐ RNB22-4	☐	#8	0.169 4.3	0.48 12.2	0.594 15.1	1.307 33.2	0.472 12	0.453 11.500	0.303 7.7	0.067 1.7	250

4 A.W.G. 22 mm ²	☐ RNBS22-5	☐	#10	0.209 5.3	0.48 12.2	0.594 15.1	1.307 33.2	0.472 12	0.453 11.500	0.303 7.7	0.067 1.7	250
	☐ RNBL22-5	☐	#10	0.209 5.3	0.65 16.5	0.531 13.5	1.319 33.5	0.472 12	0.453 11.500	0.303 7.7	0.067 1.7	250
	☐ RNBS22-6	☐	1/4	0.252 6.4	0.48 12.2	0.594 15.1	1.299 33	0.472 12	0.453 11.500	0.303 7.7	0.067 1.7	250
	☐ RNBL22-6	☐	1/4	0.252 6.4	0.65 16.5	0.531 13.5	1.319 33.5	0.472 12	0.453 11.500	0.303 7.7	0.067 1.7	250
	☐ RNB22-8	☐	5/16	0.331 8.4	0.65 16.5	0.531 13.5	1.319 33.5	0.472 12	0.453 11.500	0.303 7.7	0.067 1.7	250