


NYLON-INSULATED DOUBLE CRIMP RING TERMINALS

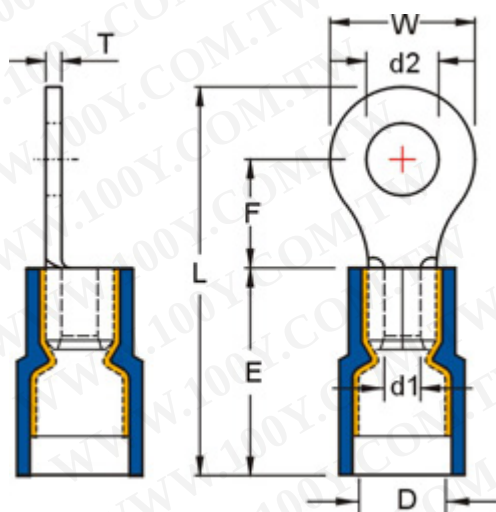

MAXIMUM ELECTRIC CURRENT:

A. W. G.	22	20	18	16	14	12	10
AMP.	9	12	17	18	30	35	50

勝特力材料 886-3-5753170

勝特力电子(上海) 86-21-34970699

勝特力电子(深圳) 86-755-83298787

[Http://www.100y.com.tw](http://www.100y.com.tw)

MAXIMUM ELECTRICAL RATING: 105° C 600 VOLTS MAX

INSULATION MATERIAL: NYLON

INSULATION COLOR:

22-16A. W. G. : RED

16-14A. W. G. : BLUE

12-10A. W. G. : YELLOW

TERMINAL MATERIAL: COPPER

DOUBLE CRIMP: WITH COPPER SLEEVE ON BARREL

WIRE RANGE A. W. G. mm ²	ITEM NO.	STUD SIZE	DIMENSION inch(mm)								Q' TY BOX
			d2	W	F	L	E	D	d1	T	
22-16 A. W. G.	☐ RNYD1-3.2	#4	0.126 3.2	0.217 5.5	0.197 5	0.728 18.5	0.433 11	0.177 4.500	0.067 1.7	0.03 0.75	1000
0.5-1.5 mm ²	☐ RNYDS1-3.7	#6	0.146 3.7	0.217 5.5	0.197 5	0.728 18.5	0.433 11	0.177 4.500	0.067 1.7	0.03 0.75	1000
	☐ RNYDM1-3.7	#6	0.146 3.7	0.26 6.6	0.248 6.3	0.803 20.4	0.433 11	0.177 4.500	0.067 1.7	0.03 0.75	1000
	☐ RNYDL1-3.7	#6	0.146 3.7	0.315 8	0.276 7	0.858 21.5	0.433 11	0.177 4.500	0.067 1.7	0.03 0.75	1000
	☐ RNYDS1-4	#8	0.160	0.26	0.248	0.803	0.433	0.177	0.067	0.03	1000

			4.3	6.6	6.3	20.4	11	4.500	1.7	0.75	
	RNYDL1-4	#8	0.169 4.3	0.315 8	0.276 7	0.858 21.8	0.433 11	0.177 4.500	0.067 1.7	0.03 0.75	1000
	RNYD1-5	#10	0.209 5.3	0.315 8	0.276 7	0.858 21.8	0.433 11	0.177 4.500	0.067 1.7	0.03 0.75	1000
	RNYDL1-5	#10	0.209 5.3	0.457 11.6	0.433 11	1.094 27.8	0.433 11	0.177 4.500	0.067 1.7	0.03 0.75	1000
	RNYD1-6	1/4	0.252 6.4	0.457 11.6	0.433 11	1.094 27.8	0.433 11	0.177 4.500	0.067 1.7	0.03 0.75	1000
	RNYD1-8	5/16	0.331 8.4	0.457 11.6	0.433 11	1.094 27.8	0.433 11	0.177 4.500	0.067 1.7	0.03 0.75	1000
	RNYD1-10	3/8	0.413 10.5	0.535 13.6	0.547 13.9	1.24 31.5	0.433 11	0.177 4.500	0.067 1.7	0.03 0.75	1000
	RNYD1-12	1/2	0.512 13	0.772 19.6	0.63 16	1.433 36.4	0.433 11	0.177 4.500	0.067 1.7	0.03 0.75	1000
	RNYD1-14	9/16	0.591 15	1.063 27	0.827 21	1.783 45.3	0.433 11	0.177 4.500	0.067 1.7	0.031 0.8	1000
	RNYD1-16	5/8	0.669 17	1.063 27	0.827 21	1.783 45.3	0.433 11	0.177 4.500	0.067 1.7	0.031 0.8	1000
	RNYD1-20	3/4	0.827 21	1.063 27	0.827 21	1.783 45.3	0.433 11	0.177 4.500	0.067 1.7	0.031 0.8	1000
16-14 A. W. G. 1.5-2.5 mm ²	RNYD2-3.2	#4	0.126 3.2	0.26 6.6	0.189 4.8	0.74 18.8	0.433 11	0.205 5.200	0.091 2.3	0.031 0.8	1000
	RNYDS2-3.7	#6	0.146 3.7	0.26 6.6	0.189 4.8	0.74 18.8	0.433 11	0.205 5.200	0.091 2.3	0.031 0.8	1000
	RNYDM2-3.7	#6	0.146 3.7	0.26 6.6	0.248 6.3	0.803 20.4	0.433 11	0.205 5.200	0.091 2.3	0.031 0.8	1000
	RNYDL2-3.7	#6	0.146 3.7	0.335 8.5	0.291 7.4	0.898 22.8	0.433 11	0.205 5.200	0.091 2.3	0.031 0.8	1000
	RNYDS2-4	#8	0.169 4.3	0.26 6.6	0.248 6.3	0.803 20.4	0.433 11	0.205 5.200	0.091 2.3	0.031 0.8	1000
	RNYDL2-4	#8	0.169 4.3	0.335 8.5	0.307 7.8	0.898 22.8	0.433 11	0.205 5.200	0.091 2.3	0.031 0.8	1000
	RNYDS2-5	#10	0.209 5.3	0.335 8.5	0.307 7.8	0.898 22.8	0.433 11	0.205 5.200	0.091 2.3	0.031 0.8	1000
16-14 A. W. G.	RNYDL2-5	#10	0.209 5.3	0.374 9.5	0.287 7.3	0.898 22.8	0.433 11	0.205 5.200	0.091 2.3	0.031 0.8	1000
	RNYD2-6	1/4	0.252	0.472	0.433	1.094	0.433	0.205	0.091	0.031	1000

1.5-2.5 mm ²			6.4	12	11	27.8	11	5.200	2.3	0.8	
	□ RNYD2-8	5/16	0.331 8.4	0.472 12	0.433 11	1.094 27.8	0.433 11	0.205 5.200	0.091 2.3	0.031 0.8	1000
	□ RNYD2-10	3/8	0.413 10.5	0.535 13.6	0.547 13.9	1.24 31.5	0.433 11	0.205 5.200	0.091 2.3	0.031 0.8	1000
	□ RNYD2-12	1/2	0.512 13	0.756 19.2	0.63 16	1.433 36.4	0.433 11	0.205 5.200	0.091 2.3	0.031 0.8	1000
	□ RNYD2-14	9/16	0.591 15	1.063 27	0.827 21	1.783 45.3	0.433 11	0.205 5.200	0.091 2.3	0.031 0.8	1000
	□ RNYD2-16	5/8	0.669 17	1.063 27	0.827 21	1.783 45.3	0.433 11	0.205 5.200	0.091 2.3	0.031 0.8	1000
	□ RNYD2-20	3/4	0.827 21	1.063 27	0.827 21	1.783 45.3	0.433 11	0.205 5.200	0.091 2.3	0.031 0.8	1000
12-10 A. W. G. 4-6 mm ²	□ RNYD5-3.7	#6	0.146 3.7	0.283 7.2	0.24 6.1	0.894 22.7	0.512 13	0.276 7.000	0.134 3.4	0.039 1	500
	□ RNYDS5-4	#8	0.169 4.3	0.283 7.2	0.24 6.1	0.894 22.7	0.512 13	0.276 7.000	0.134 3.4	0.039 1	500
	□ RNYDL5-4	#8	0.169 4.3	0.374 9.5	0.327 8.3	1.024 26	0.512 13	0.276 7.000	0.134 3.4	0.039 1	500
	□ RNYD5-5	#10	0.209 5.3	0.374 9.5	0.327 8.3	1.024 26	0.512 13	0.276 7.000	0.134 3.4	0.039 1	500
	□ RNYD5-6	1/4	0.252 6.4	0.472 12	0.413 10.5	1.161 29.5	0.512 13	0.276 7.000	0.134 3.4	0.039 1	500
	□ RNYDM5-6	1/4	0.252 6.4	0.472 12	0.512 13	1.26 32	0.512 13	0.276 7.000	0.134 3.4	0.039 1	500
	□ RNYD5-8	5/16	0.331 8.4	0.591 15	0.524 13.3	1.339 34	0.512 13	0.276 7.000	0.134 3.4	0.039 1	500
	□ RNYD5-10	3/8	0.413 10.5	0.591 15	0.524 13.3	1.339 34	0.512 13	0.276 7.000	0.134 3.4	0.039 1	500
	□ RNYD5-12	1/2	0.512 13	0.756 19.2	0.63 16	1.52 38.6	0.512 13	0.276 7.000	0.134 3.4	0.039 1	500
	□ RNYD5-14	9/16	0.591 15	1.26 32	0.992 25.2	2.134 54.2	0.512 13	0.276 7.000	0.134 3.4	0.039 1	500
	□ RNYD5-16	5/8	0.669 17	1.26 32	0.992 25.2	2.134 54.2	0.512 13	0.276 7.000	0.134 3.4	0.039 1	500
	□ RNYD5-20	3/4	0.827 21	1.26 32	0.992 25.2	2.134 54.2	0.512 13	0.276 7.000	0.134 3.4	0.039 1	500