

勝特力電材超市-龍山店 886-3-5773766
 勝特力電材超市-光復店 886-3-5729570
 勝特力電子(上海) 86-21-34970699
 勝特力電子(深圳) 86-755-83298787
<http://www.100y.com.tw>

STÄUBLI

Plug L-41...

In-line, Ø 4 mm, with spring-loaded
 MULTILAM for self-assembly of test leads.
 Type L-41Q with Ø 4 mm lateral hole for ad-
 ditional test connection.

Solder connection.




L-41



L-41/A



L-41Q

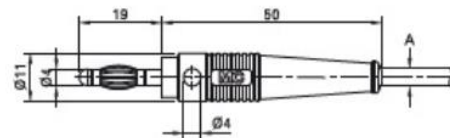

Order No.	Type	Rated voltage/current	Cable (A)		*Standard colors
64.9200-*	L-41	30 VAC / 32 A 60 VDC / 32 A	max. Ø 3.9 mm 2.5 mm ²	Ni	21 22 23 24 25
64.1020-*	L-41/A	30 VAC / 32 A 60 VDC / 32 A	max. Ø 3.9 mm 2.5 mm ²	Au	21 22 23 24 25 29
64.9199-*	L-41Q	30 VAC / 32 A 60 VDC / 32 A	max. Ø 3.9 mm 2.5 mm ²	Ni	21 22 23 24 25 26 27 29



Optional colors 26 27 28

Further information, page 6

STÄUBLI Multi-Contact

MC



MAH566

STÄUBLI

Typ/Type **L-41... / K-41...**




Lötvorgaben / Soldering specifications / Spécifications de soudure

DIN EN 60068-2-20:

260 °C = 10 s

370 °C = 5 s

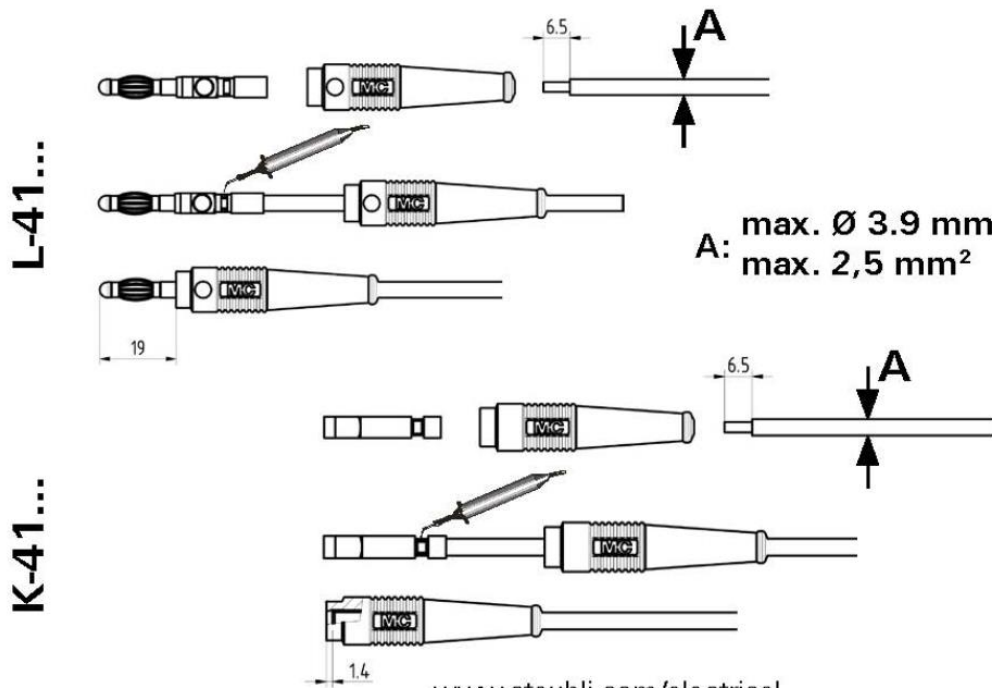

www.staubli.com/electrical

04.2019-index a