


# P50 系列[0#]

单位: mm


## P50-E2

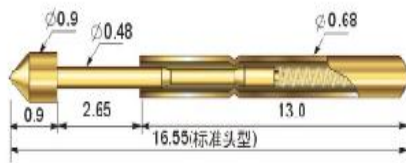


## P50-B1



## R50-1W7

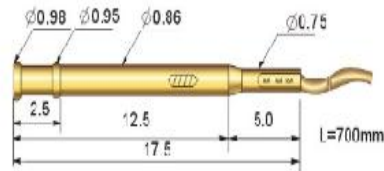


## R50-2W7

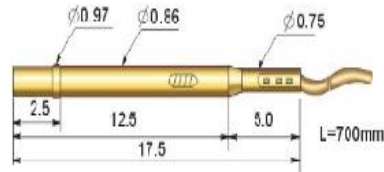


## P50-A2



## P50-B1



## P50-1D



## P50-D2




## P50-E2



## P50-E3



## P50-F1



## P50-G2



## P50-H2




## P50-J1




## P50-LM2



## P50-Q1



## P50-Q2



## P50-T2



## R50-1C



## R50-1S



## R50-1W7



## R50-2C



## R50-2S



## R50-2W7



### 订购方式

P50 -  $\begin{matrix} \text{E} \\ \text{2} \end{matrix}$

头部形状 头部直径

- \*1: 表示针杆直径上头型直径为0.8mm
- \*2: 表示标准头型直径为0.9mm
- \*3: 表示外径为1.20mm

### 技术参数

- 针杆 碳钢或3K4镀金或铱
- 针管 磷铜管镀金
- 弹簧 不锈钢线
- 套管 磷铜镀金
- 针孔尺寸 0.90mm
- 额定电流 3安培
- 接触电阻 50毫欧姆
- 接触弹力 (20g)(40g)75g(120g)

勝特力材料 886-3-5773766  
 勝特力电子(上海) 86-21-34970699  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)