



P75 系列 [1#]

单位: mm


P75-E2 (标准头型)

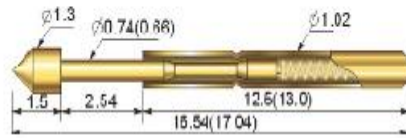

P75-B1 (标准直上头型)

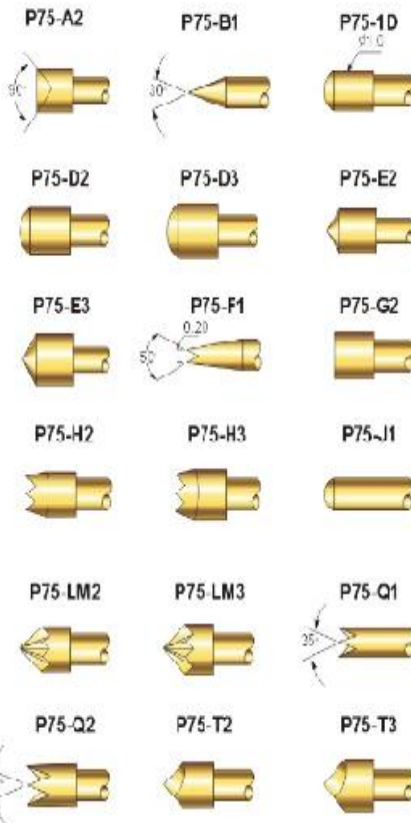

R75-1W

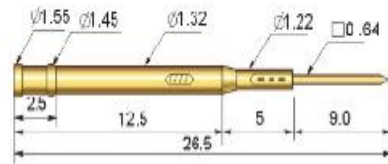

R75-1W



R75-2W



R75-3W



R75-1B



R75-2S



R75-3S



订购方式

P75-2E2

头部名称 头部形状 长度直径

*1: 表示工件上头直径为 0.4mm (或 0.35mm)
 *2: 表示零件头型量为 1.52mm
 *3: 表示头部分量为 1.50mm

技术参数

- 针管: 碳钢有镀金
- 弹簧: 不锈钢线
- 套管: 碳钢有镀金
- 针杆: 国产料 碳钢镀铬
进口料 碳钢(或SK4)镀金(或镀铬)
(片NEW标识)
- 钻头尺寸: 1.40mm
- 额定转速: 3米培
- 额定进给: 50毫米/分钟
- 抗冲击力: (100g)180g(220g)
(括号内为范围值)

勝特力材料 886-3-5773766
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)