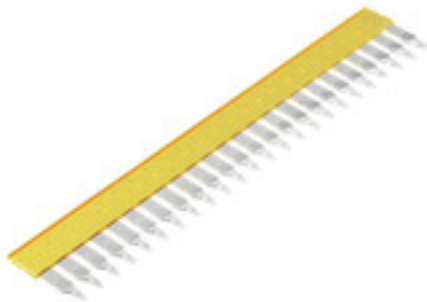


**ZQV 6/24 GE**

勝特力電材超市-龍山店 886-3-5773766  
 勝特力電材超市-光復店 886-3-5729570  
 勝特力電子(上海) 86-21-34970699  
 勝特力電子(深圳) 86-755-83298787  
<http://www.100y.com.tw>

**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26  
 D-32758 Detmold  
 Germany

[www.weidmueller.com](http://www.weidmueller.com)**Product image**

The plug-in cross-connections feature easy handling and quick installation. This saves a great deal of time during installation in comparison with screwed solutions.

**General ordering data**

Version	Accessories, Cross-connector, 41 A
Order No.	<a href="#">1908990000</a>
Type	ZQV 6/24 GE
GTIN (EAN)	4032248535309
Qty.	10 pc(s).

**ZQV 6/24 GE****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

**Technical data****Dimensions and weights**

Depth	33.96 mm	Depth (inches)	1.337 inch
Height	192.5 mm	Height (inches)	7.579 inch
Width	3.1 mm	Width (inches)	0.122 inch
Net weight	34.603 g		

**Temperatures**

Storage temperature	-25 °C...55 °C	Continuous operating temp., min.	-60
Continuous operating temp., max.	130		

**Material data**

Material	Wemid	Colour	yellow
UL 94 flammability rating	V-0		

**System specifications**

Version	For the terminals
---------	-------------------

**Additional technical data**

Installation advice	Direct mounting	Type of fixing	Plugged
---------------------	-----------------	----------------	---------

**Cross-connector**

Rated current, 2-pole	41 A	Rated current, multi-pole	41 A
Type	Cross-connector		

**Dimensions**

Pitch in mm (P)	8.1 mm
-----------------	--------

**General**

Installation advice	Direct mounting	Number of poles	24
---------------------	-----------------	-----------------	----

**Rating data**

Rated voltage	400	Rated current	41 A
---------------	-----	---------------	------

**Classifications**

ETIM 6.0	EC000489	ETIM 7.0	EC000489
ETIM 8.0	EC000489	ECLASS 9.0	27-14-11-40
ECLASS 9.1	27-14-11-40	ECLASS 10.0	27-14-11-40
ECLASS 11.0	27-14-11-40	ECLASS 12.0	27-14-11-40

**Important note**

Product information	Attention: not finger-safe; not suitable for ATEX use Due to stability and temperature reasons It is only possible to break out 60% of contact elements The usage of cross connectors reduces the rated voltage to 400V The voltage reduced to 25V if cut cross connection with blank cut edges are used
---------------------	--

**ZQV 6/24 GE**

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany

www.weidmueller.com

**Technical data****Approvals**

Approvals



ROHS

Conform

**Downloads**

Approval/Certificate/Document of  
Conformity

[EAC certificate](#)

Engineering Data

[CAD data – STEP](#)

Engineering Data

[EPLAN, WSCAD, Zuken E3.S](#)

User Documentation

[Operating instructions\\_ZDU1.5-ZDU35\\_ZQV.pdf](#)  
[StorageConditionsTerminalBlocks](#)  
[BPZL ZQV 2.5](#)

Catalogues

[Catalogues in PDF-format](#)

Brochures