






GFRST15WNL

**Features**

- Patented AUTOGUARD® self test technology includes disconnecting power to the receptacle if critical components are damaged and GFCI protection is lost
- Internal back wiring clamp and guide for quick and secure termination
- Night light option includes light sensor controls for automatic on and off, custom dual lens for optimum light output

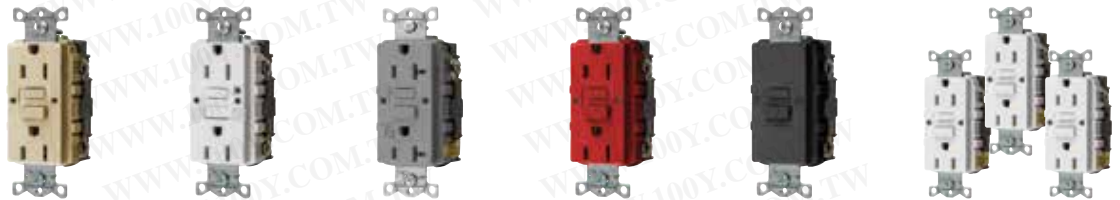



**Standard**

Rating	Color	Standard	Night Light Two LED Night Lights	Alarm	Assembled in USA	Blank Face Available in 20A Only	Standard 3-Pack Three Devices per Pack
	Almond	GFRST15AL	GFRST15ALNL	GFRST15ALB	GFRST15ALU	—	—
	Black	GFRST15BK	GFRST15BKNL	GFRST15BKB	GFRST15BKU	—	—
	Brown	GFRST15	GFRST15NL	GFRST15B	GFRST15U	—	—
	Gray	GFRST15GY	GFRST15GYNL	GFRST15GYB	GFRST15GYU	—	—
	Ivory	GFRST15I	GFRST15INL	GFRST15IB	GFRST15IU	—	GFRST15I3
	Light Almond	GFRST15LA	GFRST15LANL	GFRST15LAB	GFRST15LAU	—	GFRST15LA3
	Red	GFRST15R	GFRST15RNL	GFRST15RB	GFRST15RU	—	—
	White	GFRST15W	GFRST15WNL	GFRST15WZB	GFRST15WU	—	GFRST15W3
		Almond	GFRST20AL	GFRST20ALNL	GFRST20ALB	GFRST20ALU	GFBFST20AL
Black		GFRST20BK	GFRST20BKNL	GFRST20BKB	GFRST20BKU	GFBFST20BK	—
Brown		GFRST20	GFRST20NL	GFRST20B	GFRST20U	GFBFST20	—
Gray		GFRST20GY	GFRST20GYNL	GFRST20GYB	GFRST20GYU	GFBFST20GY	—
Ivory		GFRST20I	GFRST20INL	GFRST20IB	GFRST20IU	GFBFST20I	GFRST20I3
Light Almond		GFRST20LA	GFRST20LANL	GFRST20LAB	GFRST20LAU	GFBFST20LA	GFRST20LA3
Red		GFRST20R	GFRST20RNL	GFRST20RB	GFRST20RU	GFBFST20R	—
White		GFRST20W	GFRST20WNL	GFRST20WB	GFRST20WU	GFBFST20W	GFRST20W3

**Standard SNAPConnect®**



Rating	Color	Standard
	Almond	GFRST15SNAPAL
	Black	GFRST15SNAPBK
	Brown	GFRST15SNAP
	Gray	GFRST15SNAPGY
	Ivory	GFRST15SNAPI
	Light Almond	GFRST15SNAPLA
	Red	GFRST15SNAPR
	Almond	GFRST20SNAPAL
	Black	GFRST20SNAPBK
	Brown	GFRST20SNAP
	Gray	GFRST20SNAPGY
	Ivory	GFRST20SNAPI
	Light Almond	GFRST20SNAPLA
	Red	GFRST20SNAPR
White	GFRST20SNAPW	

**Right Angle Pigtailed Terminal**



Description	Type	Catalog Number
Clear right angle terminal with 6 inch leads, 600V, #12 AWG THHN/THWN-2, Polycarbonate housing material.	Solid Stranded	<b>SNAP1RA</b> <b>SNAP2RA</b>