

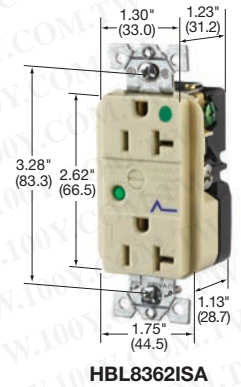


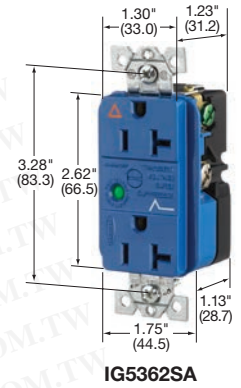

**Circuit Guard®, Specification Grade Duplex Receptacles**

Description	Color	15A 125V NEMA 5-15R UL CSA	20A 125V NEMA 5-20R UL CSA
Surge suppression receptacles with light, 240 joules/15000A per mode.	Blue	<b>HBL5260SA</b>	<b>HBL5360SA</b>
	Ivory	<b>HBL5260ISA</b>	<b>HBL5360ISA</b>
	Office White	<b>HBL5260OWSA</b>	<b>HBL5360OWSA</b>
	White	<b>HBL5260WSA</b>	<b>HBL5360WSA</b>
Surge suppression receptacles with light and alarm, 240 joules/15000A per mode.	Almond	<b>HBL5262ALSA</b>	<b>HBL5362ALSA</b>
	Blue	<b>HBL5262SA</b>	<b>HBL5362SA</b>
	Gray	<b>HBL5262GYSA</b>	<b>HBL5362GYSA</b>
	Ivory	<b>HBL5262ISA</b>	<b>HBL5362ISA</b>
	Office White	<b>HBL5262OWSA</b>	<b>HBL5362OWSA</b>
	White	<b>HBL5262WSA</b>	<b>HBL5362WSA</b>
Isolated ground, surge suppression receptacles with light and alarm, 240 joules/15000A per mode.	Blue	<b>IG5262SA</b>	<b>IG5362SA</b>
	Gray	<b>IG5262GYSA</b>	<b>IG5362GYSA</b>
	Ivory	<b>IG5262ISA</b>	<b>IG5362ISA</b>
	Office White	<b>IG5262OWSA</b>	<b>IG5362OWSA</b>
	Orange	<b>IG5262OSA</b>	<b>IG5362OSA</b>
White	<b>IG5262WSA</b>	<b>IG5362WSA</b>	
4-PLEX® surge suppression receptacles with lights. 80 joules/6500A per mode.	Blue	<b>HBL415S</b>	<b>HBL420S</b>
	Ivory	<b>HBL415IS</b>	<b>HBL420IS</b>

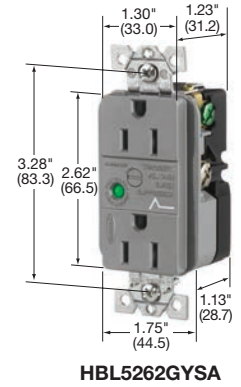

**Circuit Guard®, Hospital Grade Duplex Receptacles**


Description	Color	15A 125V NEMA 5-15R UL CSA	20A 125V NEMA 5-20R UL CSA
Surge suppression receptacles with light and alarm, 240 joules/15000A per mode.	Almond	<b>HBL8262ALSA</b>	<b>HBL8362ALSA</b>
	Blue	<b>HBL8262SA</b>	<b>HBL8362SA</b>
	Gray	<b>HBL8262GYSA</b>	<b>HBL8362GYSA</b>
	Ivory	<b>HBL8262ISA</b>	<b>HBL8362ISA</b>
	Red	<b>HBL8262RSA</b>	<b>HBL8362RSA</b>
	White	<b>HBL8262WSA</b>	<b>HBL8362WSA</b>
Isolated ground, surge suppression receptacles with light and alarm, 240 joules/15000A per mode.	Blue	<b>IG8262SA</b>	<b>IG8362SA</b>
	Gray	<b>IG8262GYSA</b>	<b>IG8362GYSA</b>
	Ivory	<b>IG8262ISA</b>	<b>IG8362ISA</b>
	Orange	<b>IG8262OSA</b>	<b>IG8362OSA</b>
	Red	<b>IG8262RSA</b>	<b>IG8362RSA</b>
	White	<b>IG8262WSA</b>	<b>IG8362WSA</b>
4-PLEX surge suppression receptacles with lights, 80 joules/6500A per mode.	Blue	—	<b>HBL420HS</b>
	Ivory	—	<b>HBL420HIS</b>
	Red	—	<b>HBL420HRS</b>

**4-PLEX® Accessories**


Description	Color	Catalog Number
4-PLEX adapter plates for 1- and 2-gang (4-PLEX mount directly to 4" (101.6) square device boxes).	Blue	<b>HBL4APBL</b>
	Ivory	<b>HBL4API</b>
	Red	<b>HBL4APR</b>
4-PLEX portable box. Portable 4" (101.6) square box with one cord grip. Accepts up to .66" (16.8) dia. cord.	Ivory	<b>HBL4PBI</b>

Note: 4-PLEX box is not UL Listed.

**Wallplates (Sold Separately)**

Configuration	High-Impact Nylon			Plated Steel	Stainless Steel (S/S) Brass	
	Color	Standard	Mid-Size			
 1-Gang	Almond	<b>NP26AL</b>	<b>NPJ26AL</b>	Chrome	<b>SCH26</b>	Smooth S/S <b>SS26</b>
	Blue	—	<b>NPJ26CBL*</b>	Brass	<b>SBP26</b>	Smooth S/S <b>SSJ26^</b>
	Blue	—	<b>NPJ26BL</b>	Plated		Smooth Brass <b>SB26</b>
	Gray	<b>NP26GY</b>	<b>NPJ26GY</b>			
	Ivory	—	<b>NPJ26C*</b>			
	Ivory	<b>NP26I</b>	<b>NPJ26I</b>			
	Off. White	<b>NP26OW</b>	<b>NPJ26OW</b>			
	Orange	<b>NP26OIG**</b>	—			
	Red	<b>NP26R</b>	<b>NPJ26R</b>			
	White	<b>NP26W</b>	<b>NPJ26W</b>			

Note: \*Premarked "COMPUTER ONLY." Lettering is block 1/4" high.  
 \*\*Premarked "ISOLATED GROUND." Lettering is block 1/4" high.  
 ^ Jumbo size plate.  
 See section N for additional wallplates.  
 See page M-19 for technical information.

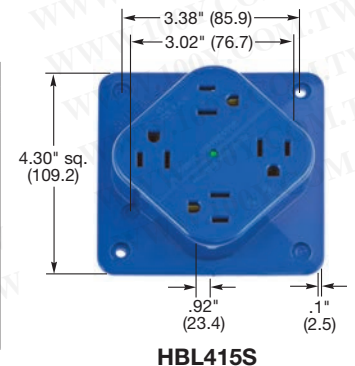

Dimensions in Inches (mm)