


article#	6239-6
article description	CEE-inlet flange 70x70 straight 30A 2P3W 6h IP44 UL
description long	CEE-inlet flange 70x70 straight 30A 2P3W 6h IP44 UL (PCE330B6S) housing material: PA6 rated current: 32A/30A number of poles: 2P3W (3p) clock position: 6h rated voltage: 250VAC contacts: brass connection technology: screw terminals dimensions (flange/fixing center): 70x70mm / 56x56mm IP protection class: IP44 according to UL1682 und IEC/EN 60309-2 (SERIE II) UL-product category: QLIW / QLIW7 UL-file number: E252008
GTIN (EAN)	9003399247545
country of origin	AT
customs number	85366990
net weight	0.125 kg
packaging quantity	10
minimum order quantity	10

ETIM 9.0	EC001319
IEC-amperage	32 A
Amperage according to UL/CSA (for UL-version)	30 A
Number of poles	3
Clock hour position	6 h
Identification colour	Blue
Degree of protection (IP)	IP44
Connection system	Screwed terminal
Construction type	Built-up device plug
Angle of plug	Angled
Material	Plastic
Contact material	CuZn
Surface treatment contacts	Untreated

a	2.76 inch
b	2.76 inch
c	2.20 inch
d	2.20 inch
e	0.83 inch
f	2.01 inch
g	0.22 inch
h	2.17 inch
wire flexible	14-10 AWG
wire solid	2,5-10 mm ²
contact screws	9.74 lbf-in
dismantling length	1.97 inch
stripping length	0.47-0.55 inch
temperature resistance	-13 – 176 °F

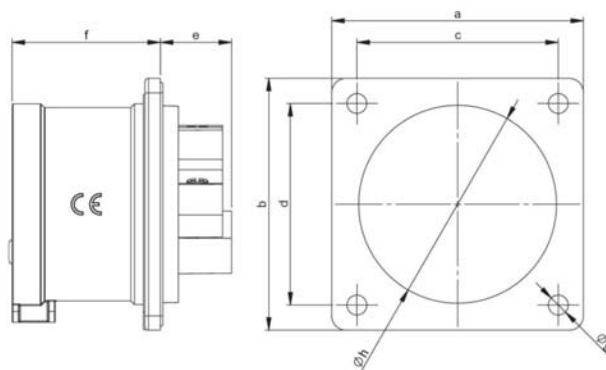

<https://www.pcelectric.at/shop/en/?func=detail&artnr=6239-6>

勝特力電材超市-龍山店 886-3-5773766
 勝特力電材超市-光復店 886-3-5729570
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
<http://www.100y.com.tw>