


型號: TYP 6601 6618 6623 6801 6818

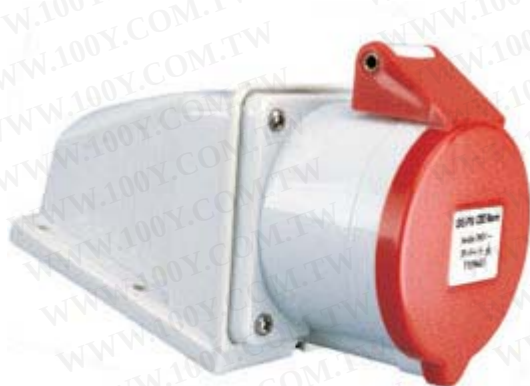

防護等級: IP44 型

商品名稱: 16-32A 明裝插座

勝特力材料 886-3-5753170

勝特力电子(上海) 86-21-34970699

勝特力电子(深圳) 86-755-83298787

[Http://www.100y.com.tw](http://www.100y.com.tw)



電  
流  
Amps  
極  
數  
Poles

110V  
50-60HZ

3P 4P 5P  
4H 4H 4H

230V  
50-60HZ

3P 4P 5P  
6H 6H 6H

400V  
50-60HZ

3P 4P 5P  
9H 6H 6H

500V  
50-60HZ

3P 4P 5P  
7H 7H 7H

100-300  
HZ  
380V

3P 4P 5P  
10H 10H 10H


100-300  
HZ  
380V

3P 4P 5P  
2H 2H 2H

A P 訂貨號  
TYP



| A  | P | 訂貨號<br>TYP | 110V  | 230V  | 400V  | 500V  | 100-300<br>HZ<br>380V | 100-300<br>HZ<br>380V |
|----|---|------------|-------|-------|-------|-------|-----------------------|-----------------------|
| 16 | 3 |            | 66014 | 6601  | 66019 | 66017 | 66010                 | 66012                 |
|    | 4 |            | 66184 | 66189 | 6618  | 66187 | 66180                 | 66182                 |
|    | 5 |            | 66234 | 66239 | 6623  | 66237 | 66230                 | 66232                 |
| 32 | 3 |            | 68014 | 6801  | 68019 | 68017 | 68010                 | 68012                 |
|    | 4 |            | 68184 | 68189 | 6818  | 68187 | 68180                 | 68182                 |
|    | 5 |            | 68234 | 68239 | 6823  | 68237 | 68230                 | 68232                 |

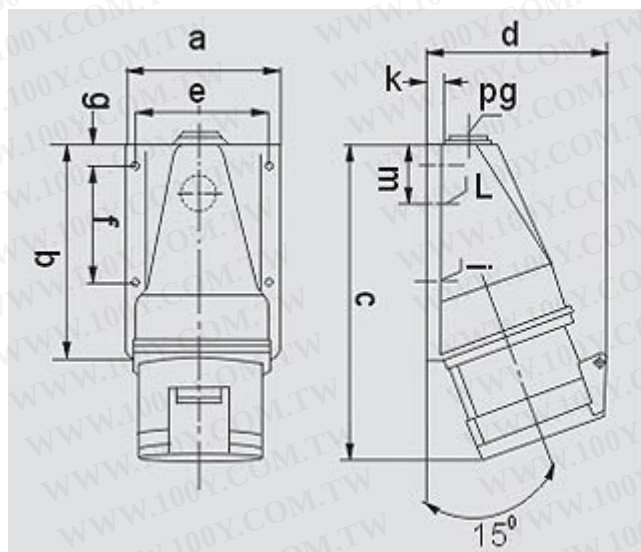

## 明装插座

- 电缆入口: 顶部一个(开口)

底部一个(闭合)

- 防护等级: 防溅 IP44 ▲

### Surface mounted socket

- Cable inlet: One top (opening)

One bottom hole (closed)

- IP44 ▲

| 电 流 Amp.                                    | 16   |      |      | 32   |      |      |
|---------------------------------------------|------|------|------|------|------|------|
| 极 数 Poles                                   | 3    | 4    | 5    | 3    | 4    | 5    |
| a                                           | 71   | 71   | 81   | 81   | 81   | 81   |
| b                                           | 83   | 83   | 102  | 102  | 102  | 102  |
| c                                           | 128  | 130  | 147  | 157  | 157  | 157  |
| d                                           | 78   | 82   | 90   | 94   | 94   | 98   |
| e                                           | 60   | 60   | 70   | 70   | 70   | 70   |
| f                                           | 33.5 | 33.5 | 47.5 | 47.5 | 47.5 | 47.5 |
| g                                           | 13   | 13   | 12.5 | 12.5 | 12.5 | 12.5 |
| iφ                                          | 5.3  | 5.3  | 5.3  | 5.3  | 5.3  | 5.3  |
| k                                           | 8.5  | 8.5  | 8.5  | 8.5  | 8.5  | 8.5  |
| lφ                                          | 23   | 23   | 23   | 23   | 23   | 23   |
| m                                           | 37   | 37   | 37   | 33   | 33   | 33   |
| 最小导线截面mm <sup>2</sup>                       | 1.5  | 1.5  | 1.5  | 2.5  | 2.5  | 2.5  |
| Min conducting wire section mm <sup>2</sup> |      |      |      |      |      |      |
| 最大导线截面mm <sup>2</sup>                       | 4    | 4    | 4    | 10   | 10   | 10   |
| Max conducting wire section mm <sup>2</sup> |      |      |      |      |      |      |