


產品備註:

UL File No.: E159426
 CSA File No.: LR102762

規格說明:

Current Rating: 1A AC,DC(AWG 26)
 Voltage Rating: 125V AC,DC
 Withstand Voltage: 250V AC/Minute
 Contact Resistance : 20mΩ Max.
 Insulation Resistance : 100MΩ Min.
 Temperature Range: -40°C to +85°C
 Applicable PC Board Thickness: 0.8mm

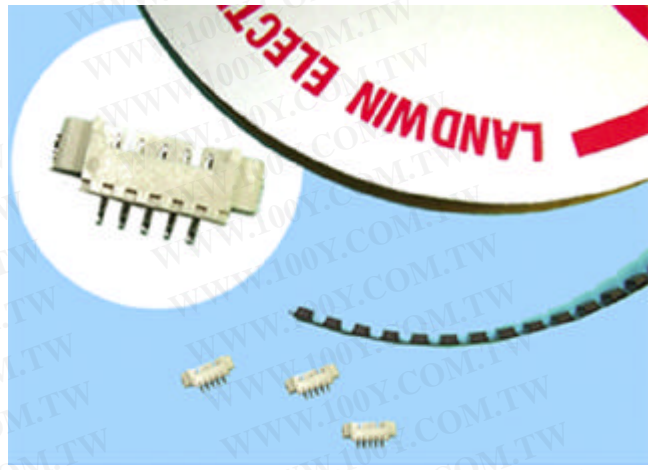





1251P

Straight-Type

1252P

Right Angle-Type

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

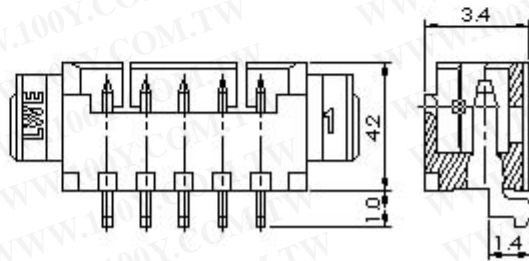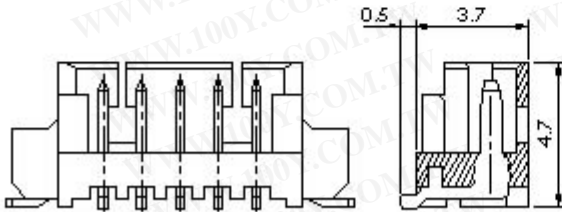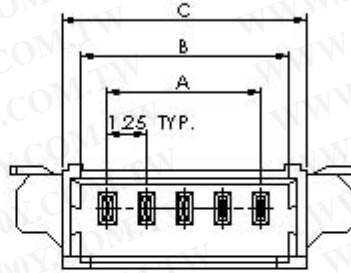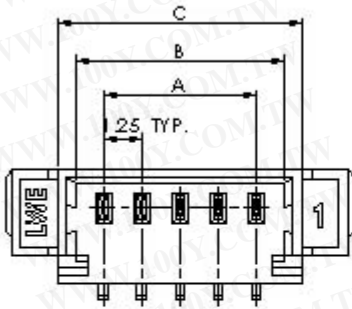

Ordering Information :

Circuits	Part Number		Dimension			Reel Q'ty
	Straight	Right Angle	A	B	C	
2	1251P0210T	1252P0210T	1.25	3.05	4.25	1,000 Pcs
3	1251P0310T	1252P0310T	2.50	4.30	5.50	1,000 Pcs
4	1251P0410T	1252P0410T	3.75	5.55	6.75	1,000 Pcs
5	1251P0510T	1252P0510T	5.00	6.80	8.00	1,000 Pcs
6	1251P0610T	1252P0610T	6.25	8.05	9.25	1,000 Pcs
7	1251P0710T	1252P0710T	7.50	9.30	10.50	1,000 Pcs
8	1251P0810T	1252P0810T	8.75	10.55	11.75	1,000 Pcs
9	1251P0910T	1252P0910T	10.00	11.80	13.00	1,000 Pcs
10	1251P1010T	1252P1010T	11.25	13.05	14.25	1,000 Pcs
11	1251P1110T	1252P1110T	12.50	14.30	15.50	1,000 Pcs
12	1251P1210T	1252P1210T	13.75	15.55	16.75	1,000 Pcs
13	1251P1310T	1252P1310T	15.00	16.80	18.00	1,000 Pcs
14	1251P1410T	1252P1410T	16.25	18.05	19.25	1,000 Pcs
15	1251P1510T	1252P1510T	17.50	19.30	20.50	1,000 Pcs