



RoHS

Compatible



SIGN	DATE	DESCRIPTION	APPROVER
△			
△			
△			

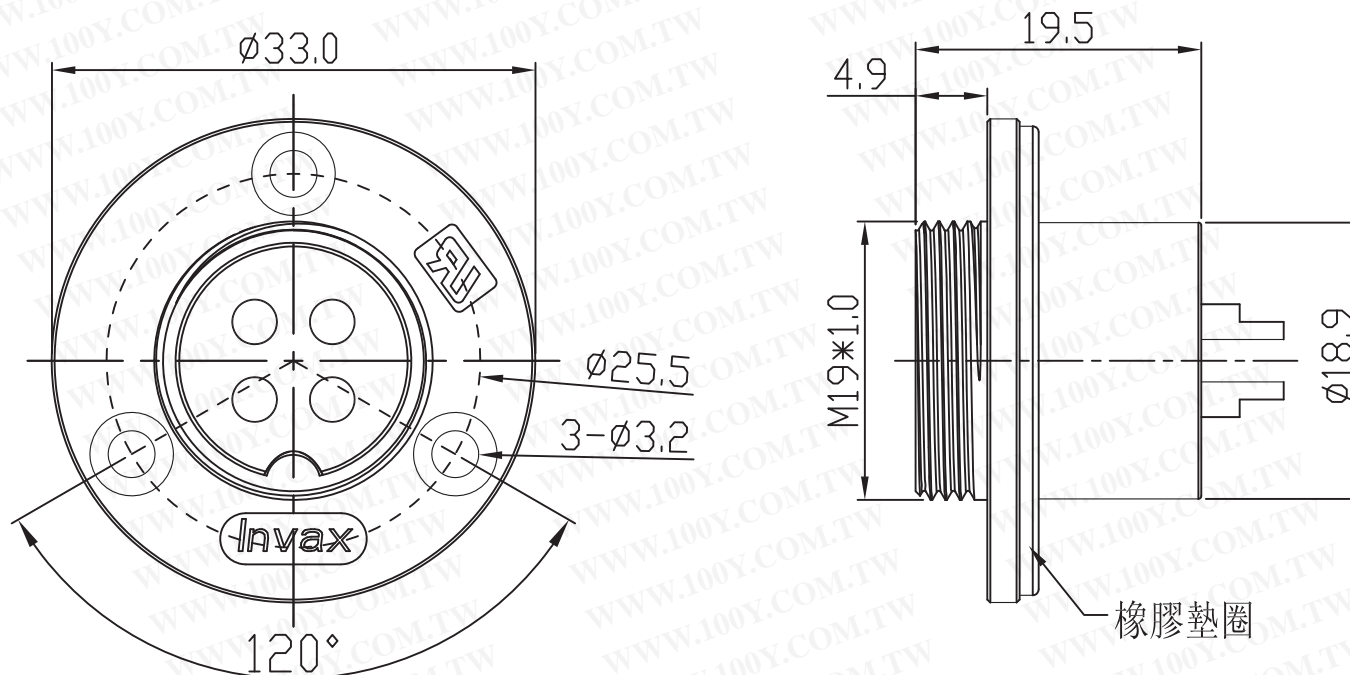

橡膠墊圈

Note:

- Rated current : 7A
- Rated voltage : 250V
- Withstanding voltage(AC.V.rms)1 minute: $\geq 1000V$
- Insulation resistance (MΩ MIN) at DC 500V: $\geq 1000 M\Omega$
- Contact resistance (mΩ MAX) at DC 1A: $\leq 3m\Omega$
- Operation temperature : $-40^{\circ}C \sim +65^{\circ}C$

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Invax

TITLE: CS2對調系列4PIN面板座 (公針)					
PART NO.: CS2R-04APNS			CUSTOMER P/N:		
APP BY	CHK BY	RF BY	DES BY	Tolerance	X.X ±0.3 X.XX ±0.2 X° ±1
			李海成 2015/01/21		
				UNITS: mm	
				SCALE: 1/1	
				REVISION: A	