



RoHS

Compatible

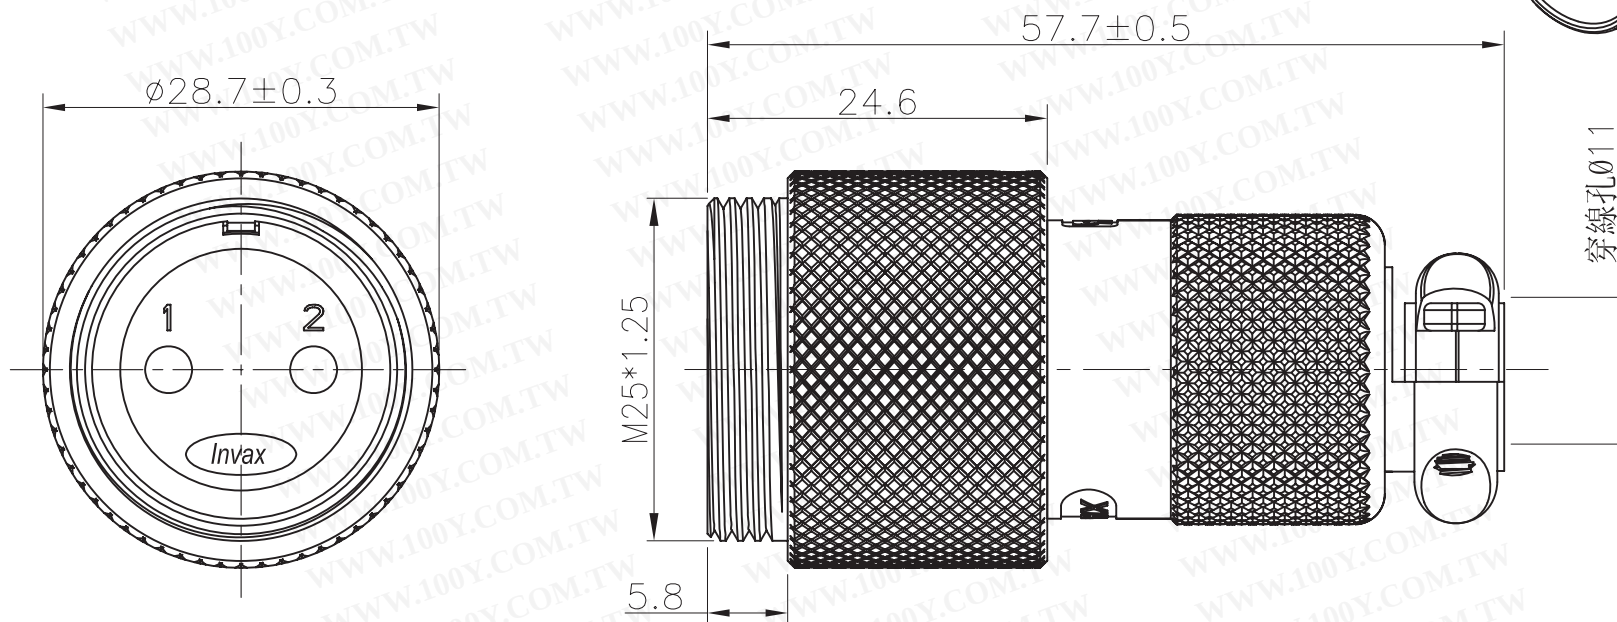

SIGN	DATE	DESCRIPTION	APPROVER
△			
△			
△			

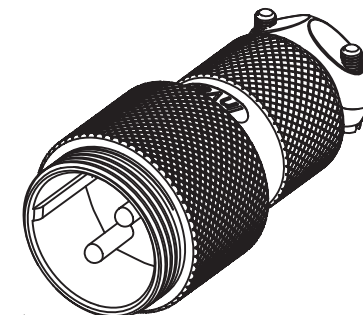

Note:

Rated current : 10A

Rated voltage : 250V

Withstanding voltage(AC.V.rms)1 minute: $\geq 2000V$

Insulation resistance (M Ω MIN) at DC 500V: $\geq 2000 M\Omega$

Contact resistance (m Ω MAX) at DC 1A: $\leq 3m\Omega$

Operation temperature : -40°C ~ +65°C

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

TITLE: CS3E系列2PIN公針接線頭(延長型)

PART NO.: CS3E-02APNS-00

CUSTOMER P/N:

APP BY	CHK BY	RF BY	DES BY		Tolerance
			Peter Chen	UNITS: mm	X.X ±0.2
				SCALE: 1/1	X.XX ±0.10
				REVISION: A	X° ±1