

M8 防水傳感器連接器

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)



M8系列普通型

M8电缆连接器, 针, 直, 压接型
 Male cable connector, screw



尺寸图

M8电缆连接器, 孔, 直, 压接型
 Female cable connector, screw



尺寸图

M8针位图A-code 3,4芯




针数 contacts	订 货 号 ordering-number
3	C08-11210-3P
4	C08-11210-4P

M8孔位图A-code 3,4芯



针数 contacts	订 货 号 ordering-number
3	C08-11210-3S
4	C08-11210-4S

M8弯角连接器, 针, 压接型
 Male angled connector, screw

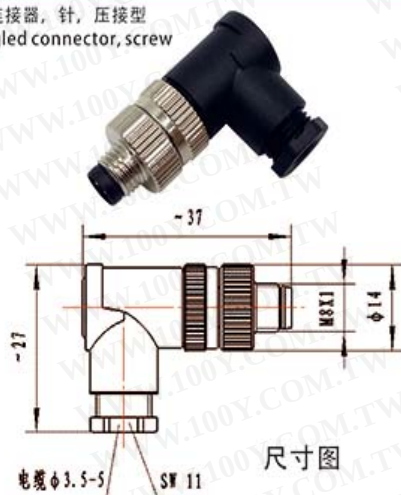

尺寸图

M8弯角连接器, 孔, 压接型
 Female angled connector, screw



尺寸图

M8针位图A-code 3,4芯



针数 contacts	订 货 号 ordering-number
3	C08-21111-3P
4	C08-21111-4P


M8孔位图A-code 3,4芯




针数 contacts	订 货 号 ordering-number
3	C08-21111-3S
4	C08-21111-4S

M8系列普通型

M8电缆连接器，针，直，焊接
Male cable connector, solder

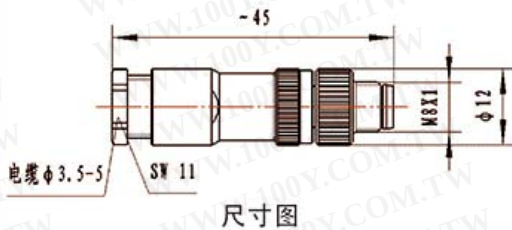

M8电缆连接器，孔，直，焊接
Female cable connector, solder

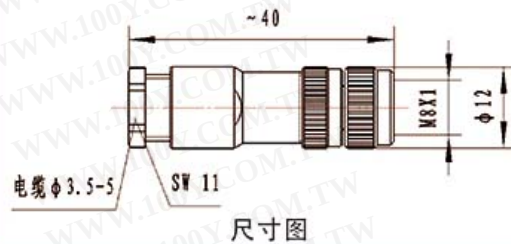

M8针位图A-code 3,4,6,8芯,
B-code 5芯




针数 contacts	订货号 ordering-number
3	C08-11311-3P
4	C08-11311-4P
6	C08-11311-6P
8	C08-11311-8P
5	C08-11311-5P-B

M8孔位图A-code 3,4,6,8芯,
B-code 5芯




针数 contacts	订货号 ordering-number
3	C08-11311-3S
4	C08-11311-4S
6	C08-11311-6S
8	C08-11311-8S
5	C08-11311-5S-B

M8弯角连接器，针，焊接
Male angled connector, solder

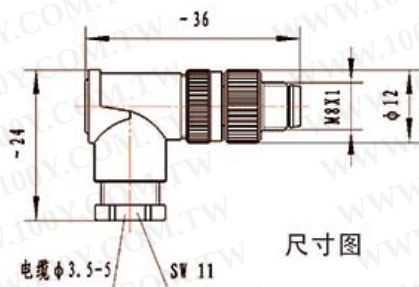

M8弯角连接器，孔，焊接
Female angled connector, solder

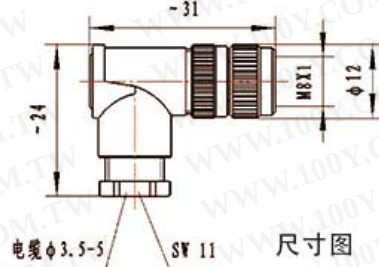

M8针位图A-code 3,4,6,8芯,
B-code 5芯



针数 contacts	订货号 ordering-number
3	C08-21311-3P
4	C08-21311-4P
6	C08-21311-6P
8	C08-21311-8P
5	C08-21311-5P-B

M8孔位图A-code 3,4,6,8芯,
B-code 5芯



针数 contacts	订货号 ordering-number
3	C08-21311-3S
4	C08-21311-4S
6	C08-21311-6S
8	C08-21311-8S
5	C08-21311-5S-B

M8 系列普通型技术参数



针数	3		4	5	6	8	Number of contacts
锁紧方式	螺纹式/screw						Connector locking system
接线方式	螺钉压接、焊接/screw, solder			焊接/solder			Termination
连接截面	最大 0.25平方毫米/max.0.25mm ²				最大 0.14平方毫米/max.0.14mm ²		Wire guage
电缆直径	3.5-5mm						Cable outlet
防护等级	IP67						Degree go protection
机械寿命	>100次插拔周期/ >100 mating cycles						Mechanical operation
工作温度	(-25° - 85°)						temperature range
额定电压	60V	30V	30V	30V	30V		Rated voltage
额定冲击电压	1500V			800V			Rated impulse voltage
污染等级	3						Pollution degree
过电保护等级	II						Overvoltage categorie
绝缘组别	III						Material group
额定电流 (40°)	3A				1.5A		Rated current(40°)
接触电阻	<=3mΩ(金/gold)						Contact resistance
触点材料	黄铜/brass						Material of contact
触点电镀材料	金/gold						Contact plating
插座材料	尼龙/PA						Material of contact body
外壳材料	尼龙/PA						Material of housing
锁键	A	A	B	A	A		codding key

M8连接器 普通焊接型



针数 contacts	订货号 ordering-number
3	C08-11311-3P
4	C08-11311-4P
6	C08-11311-6P
8	C08-11311-8P
5	C08-11311-5P-B



针数 contacts	订货号 ordering-number
3	C08-11311-3S
4	C08-11311-4S
6	C08-11311-6S
8	C08-11311-8S
5	C08-11311-5S-B

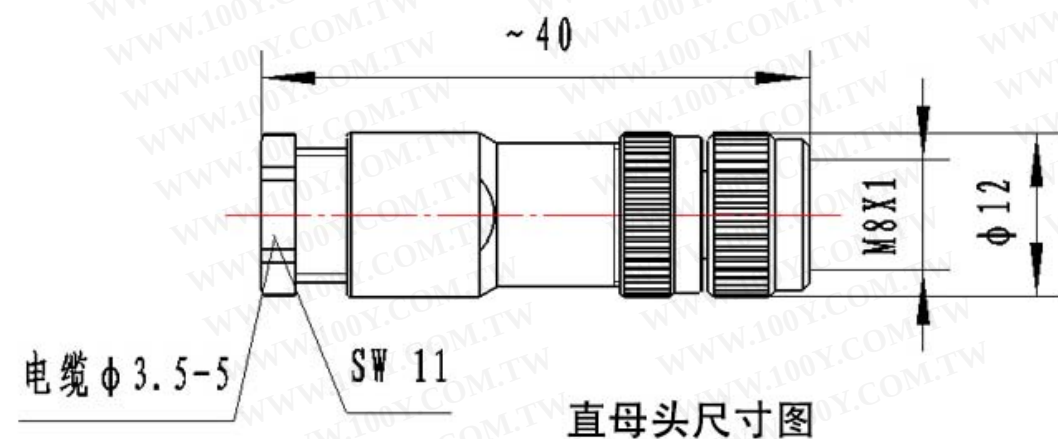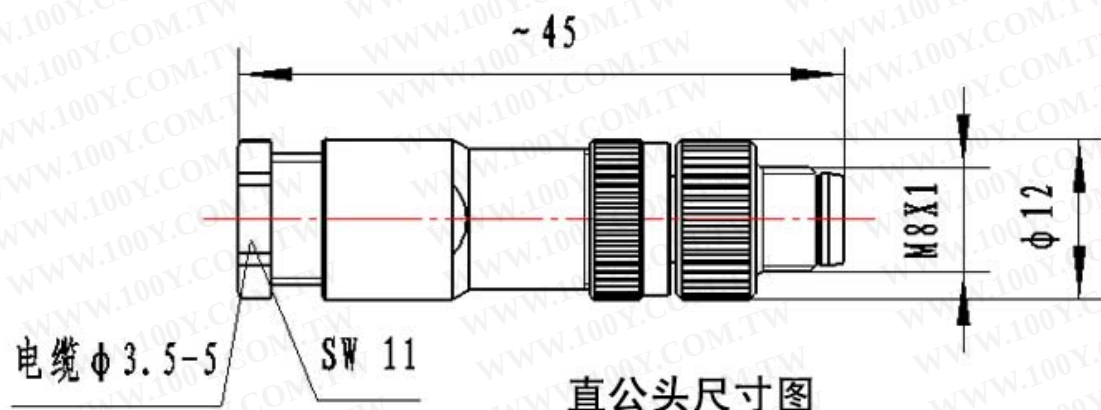



针数 contacts	订货号 ordering-number
3	C08-21311-3P
4	C08-21311-4P
6	C08-21311-6P
8	C08-21311-8P
5	C08-21311-5P-B

针数 contacts	订货号 ordering-number
3	C08-21311-3S
4	C08-21311-4S
6	C08-21311-6S
8	C08-21311-8S
5	C08-21311-5S-B

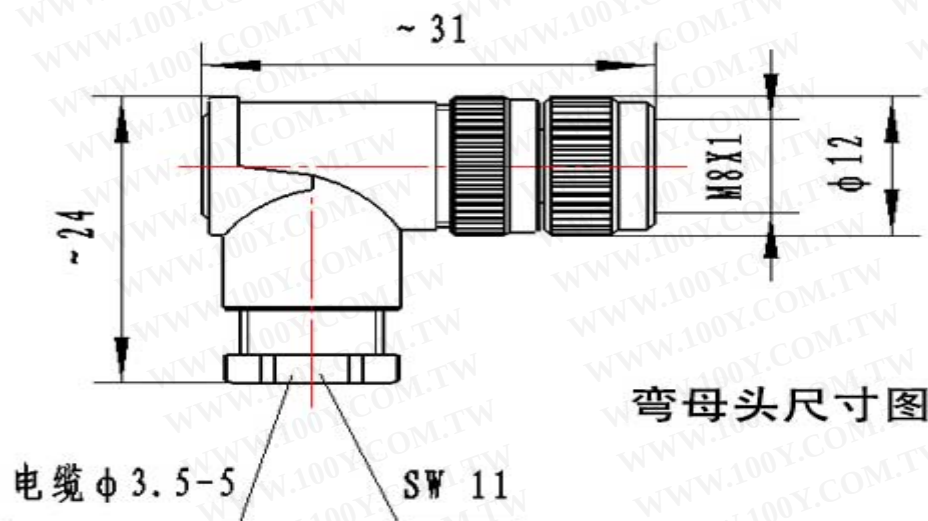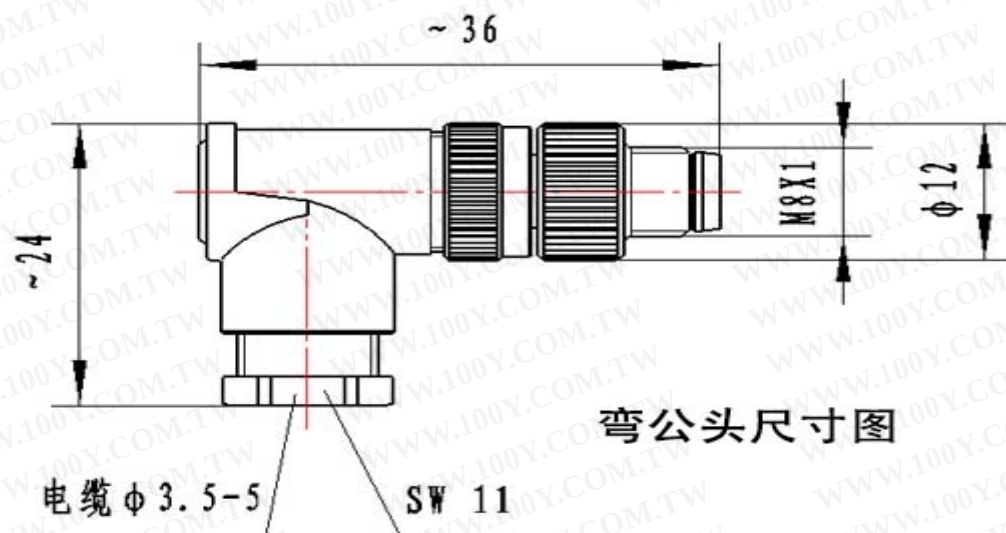


A扣 插针面 插孔面

3芯




	X	Y
1	-1.75	0
2	-	-
3	1.75	0
4	0	1.75




	X	Y
1	1.75	0
2	-	-
3	-1.75	0
4	0	1.75

4芯




	X	Y
1	-1.70	-0.50
2	-1.08	1.45
3	1.70	-0.50
4	1.08	1.45



	X	Y
1	1.70	-0.50
2	1.08	1.45
3	-1.70	-0.50
4	-1.08	1.45

6芯



	X	Y
1	-1.37	-1.32
2	1.37	-1.32
3	1.75	0.74
4	0	1.90
5	-1.75	0.74
6	0	0




	X	Y
1	1.37	-1.32
2	-1.37	-1.32
3	-1.75	0.74
4	0	1.90
5	1.75	0.74
6	0	0

8芯




	X	Y
1	-0.90	-1.65
2	0.90	-1.65
3	1.85	-0.35
4	1.45	1.20
5	0	1.85
6	-1.45	1.20
7	-1.85	-0.35
8	0	0




	X	Y
1	0.90	-1.65
2	-0.90	-1.65
3	-1.85	-0.35
4	-1.45	1.20
5	0	1.85
6	1.45	1.20
7	1.85	-0.35
8	0	0

B扣

5芯



	X	Y
1	-1.70	-0.35
2	-0.98	1.45
3	1.70	-0.35
4	0.98	1.45
5	0	-1.35




	X	Y
1	1.70	-0.35
2	0.98	1.45
3	-1.70	-0.35
4	-0.98	1.45
5	0	-1.35

M8系列屏蔽型

M8电缆连接器, 针, 带屏蔽, 焊接
Male cable connector, shieldable, solder



M8电缆连接器, 孔, 带屏蔽, 焊接
Female cable connector, shieldable, solder

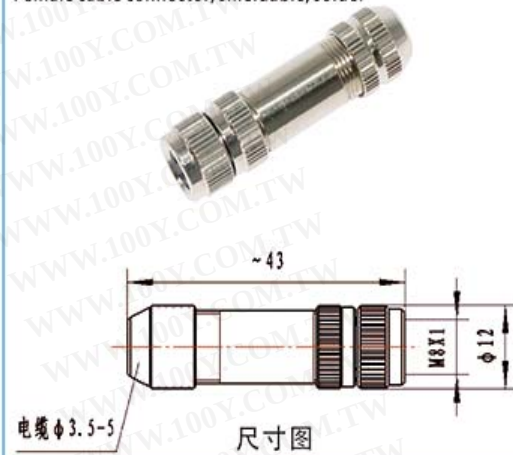

M8针位图A-code 3,4,6,8芯,
B-code 5芯



针数 contacts	订货号 ordering-number
3	C08-11321-3P
4	C08-11321-4P
6	C08-11321-6P
8	C08-11321-8P
5	C08-11321-5P-B

M8孔位图A-code 3,4,6,8芯,
B-code 5芯



针数 contacts	订货号 ordering-number
3	C08-11321-3S
4	C08-11321-4S
6	C08-11321-6S
8	C08-11321-8S
5	C08-11321-5S-B

M8电缆连接器, 针, 带屏蔽, 螺钉压接
Male cable connector, shieldable, screw termination



M8电缆连接器, 孔, 带屏蔽, 螺钉压接
Female cable connector, shieldable, screw termination



M8针位图A-code 3,4芯



针数 contacts	订货号 ordering-number
3	C08-11121-3P
4	C08-11121-4P

M8孔位图A-code 3,4芯



针数 contacts	订货号 ordering-number
3	C08-11121-3S
4	C08-11121-4S

M8系列屏蔽型技术参数


针数	3		4		5		6		8		Number of contacts	
锁紧方式	螺纹式/screw										Connector locking system	
接线方式	螺钉压接、焊接/screw、solder					焊接/solder					Termination	
连接截面	最大 0.25平方毫米/max.0.25mm²										最大 0.14平方毫米/max.0.14mm	Wire gauge
电缆直径	3.5-5mm											Cable outlet
防护等级	IP67											Degree go protection
机械寿命	>100次插拔周期/ >100 mating cycles											Mechanical operation
工作温度	(-25° - 85°)											temperature range
额定电压	60V	30V	30V	30V	30V	30V						Rated voltage
额定冲击电压	1500V			800V								Rated impulse voltage
污染等级	3											Pollution degree
过电保护等级	II											Overvoltage categorie
绝缘组别	III											Material group
额定电流 (40°)	3A				1.5A							Rated current(40°)
接触电阻	<=3mΩ(金/gold)											Contact resistance
触点材料	黄铜/brass											Material of contact
触点电镀材料	金/gold											Contact plating
插座材料	尼龙/PA											Material of contact body
外壳材料	尼龙/PA											Material of housing
锁键	A	A	B	A	A							coding key

M8连接器 屏蔽焊接型 全金属




针数 contacts	订货号 ordering-number
3	C08-11321-3P
4	C08-11321-4P
6	C08-11321-6P
8	C08-11321-8P
5	C08-11321-5P-B

针数 contacts	订货号 ordering-number
3	C08-11321-3S
4	C08-11321-4S
6	C08-11321-6S
8	C08-11321-8S
5	C08-11321-5S-B

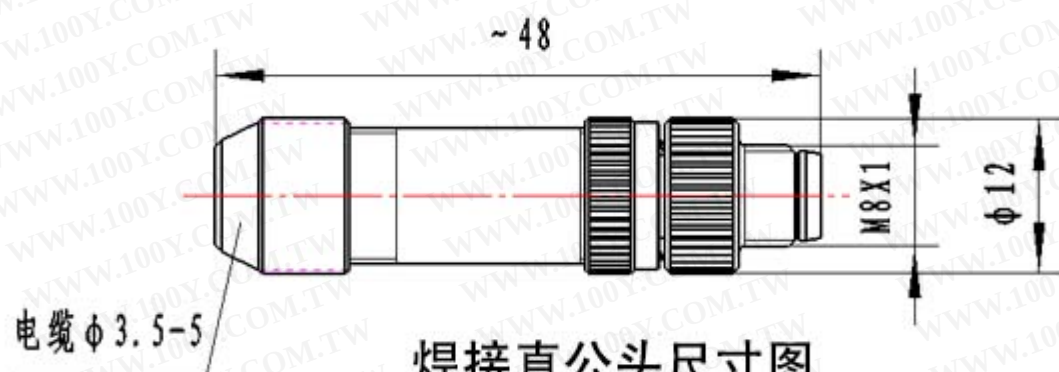

焊接直公头尺寸图

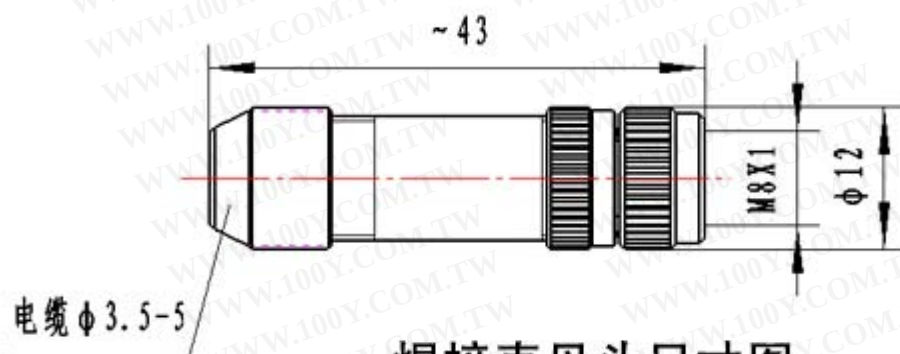


焊接直母头尺寸图




针数 contacts	订货号 ordering-number
3	C08-11121-3P
4	C08-11121-4P

针数 contacts	订货号 ordering-number
3	C8-11121-3S
4	C08-11121-4S

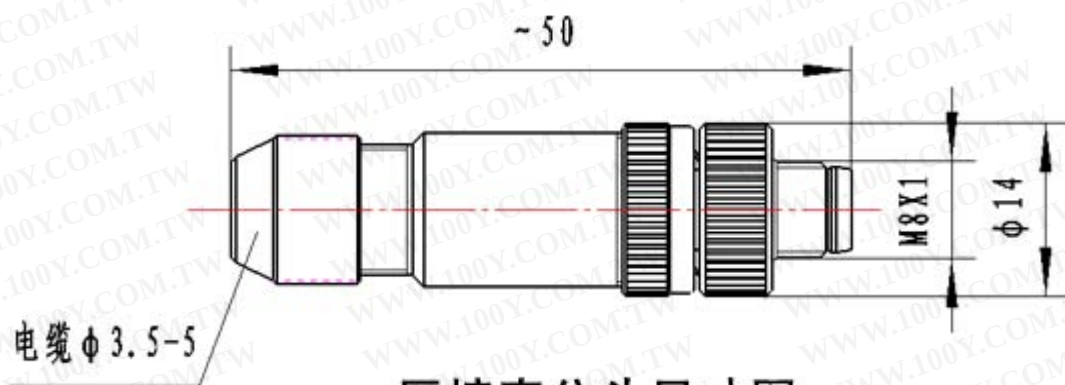

压接直公头尺寸图

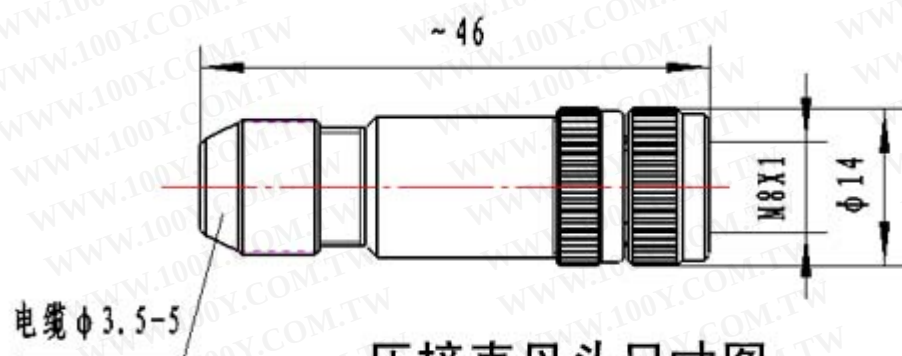


压接直母头尺寸图

法兰座座前

M8法兰座，针，座前螺纹M8X1，焊接


Male panel mount connector, front fastened with M8×1,solder

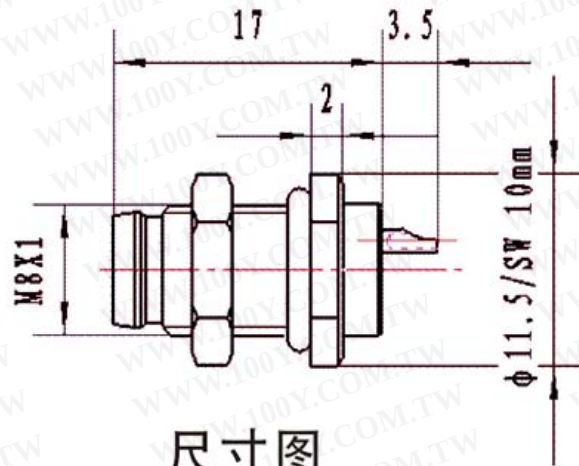

尺寸图




M8针位图A-code 3,4,6,8芯,
B-code 5芯

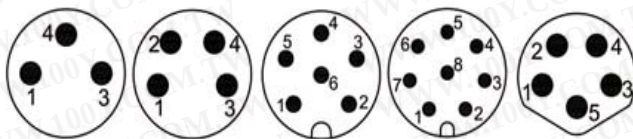

针数 contacts	订 货 号 ordering-number
3	C08-12321-3P
4	C08-12321-4P
6	C08-12321-6P
8	C08-12321-8P
5	C08-12321-5P-B

M8法兰座，针，座前螺纹M8X1，浸焊


Male panel mount connector, front fastened with M8×1, dip solder

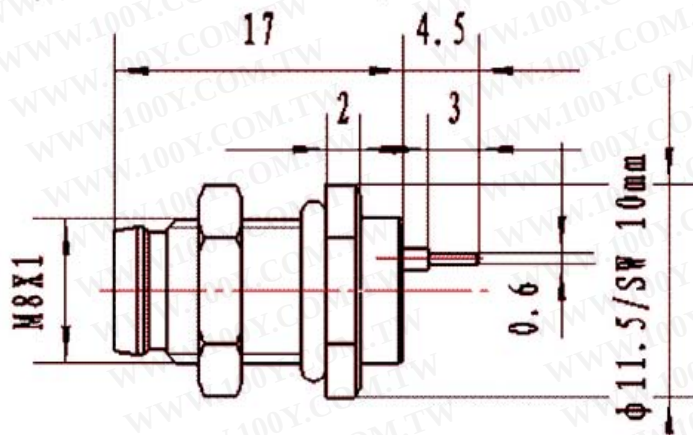

尺寸图




M8针位图A-code 3,4,6,8芯, B-code 5芯

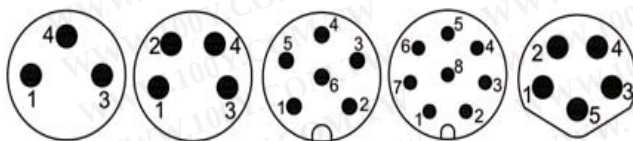

针数 contacts	订货号 ordering-number
3	C08-12421-3P
4	C08-12421-4P
6	C08-12421-6P
8	C08-12421-8P
5	C08-12421-5P-B

M8法兰座, 针, 座前螺纹M8X1可带屏蔽

Male panel mount connector, front fastened with M8×1,
with shielding sheet

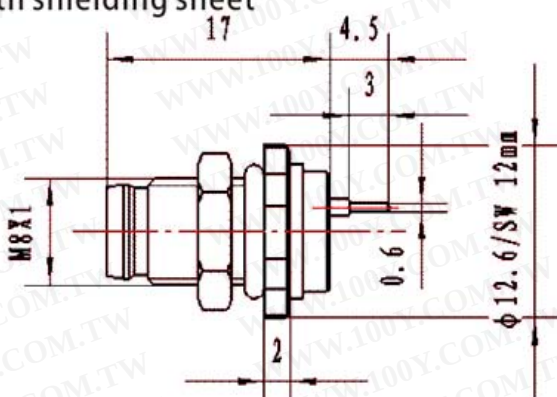

尺寸图




M8针位图A-code 3,4,6,8芯, B-code 5芯



针数 contacts	订货号 ordering-number
3	C08-12425-3P
4	C08-12425-4P
6	C08-12425-6P
8	C08-12425-8P
5	C08-12425-5P-B


with single wires

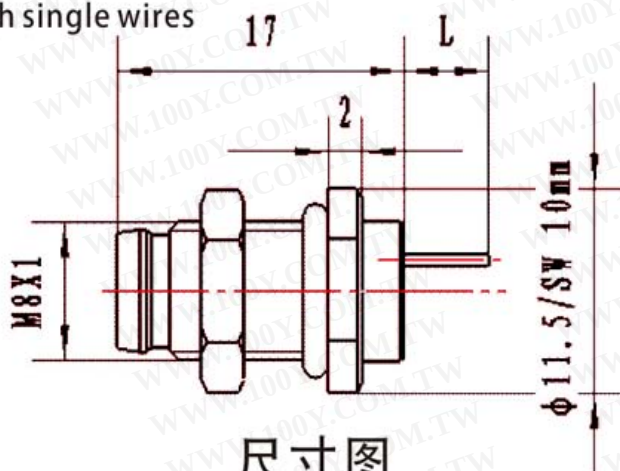

尺寸图




M8针位图A-code 3,4,6,8芯, B-code 5芯

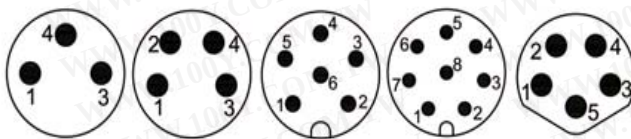

针 数 contacts	订 货 号 ordering-number
3	C08-12521-3P-L
4	C08-12521-4P-L
6	C08-12521-6P-L
8	C08-12521-8P-L
5	C08-12521-5P-B-L

M8法兰座, 针, 座前螺纹M8X1可带屏蔽, 带线
male panel mount connector, front fastened with M8×1
with single wires, with shielding sheet

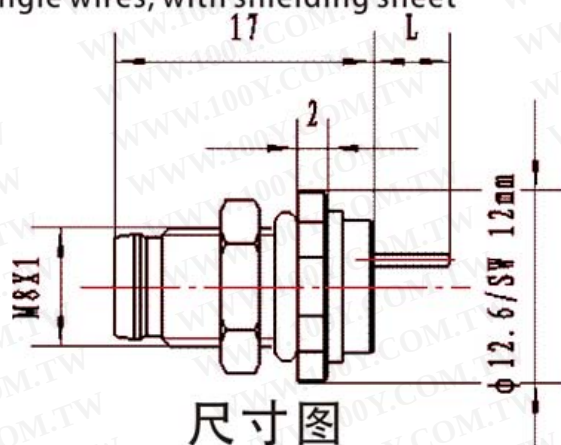


M8针位图A-code 3,4,6,8芯, B-code 5芯



针 数 contacts	订 货 号 ordering-number
3	C08-12525-3P-L
4	C08-12525-4P-L
6	C08-12525-6P-L
8	C08-12525-8P-L
5	C08-12525-5P-B-L

M8法兰座, 针, 座后螺纹M8X0.5, 焊接

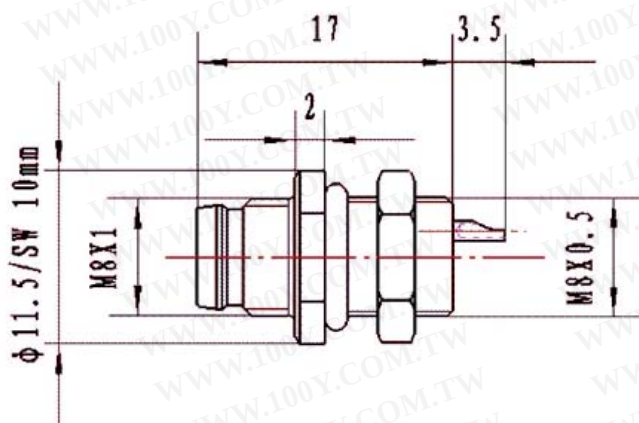


M8针位图A-code 3,4,6,8芯, B-code 5芯



针 数 contacts	订 货 号 ordering-number
3	C08-12322-3P
4	C08-12322-4P
6	C08-12322-6P
8	C08-12322-8P
5	C08-12322-5P-B

M8法兰座, 孔, 座前螺纹M12X1, 焊接

Female panel mount connector, front fastened with M12×1,solder

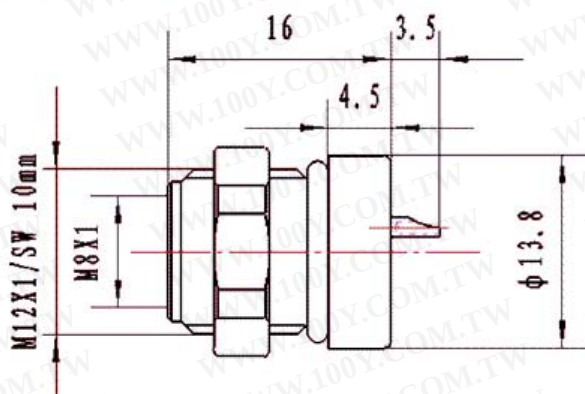

尺寸图




M8孔位图A-code 3,4,6,8芯, B-code 5芯



针 数 contacts	订 货 号 ordering-number
3	C08-12323-3S
4	C08-12323-4S
6	C08-12323-6S
8	C08-12323-8S
5	C08-12323-5S-B

M8法兰座, 孔, 座前螺纹M12X1, 浸焊


Female panel mount connector, front fastened with M12×1, dip solder

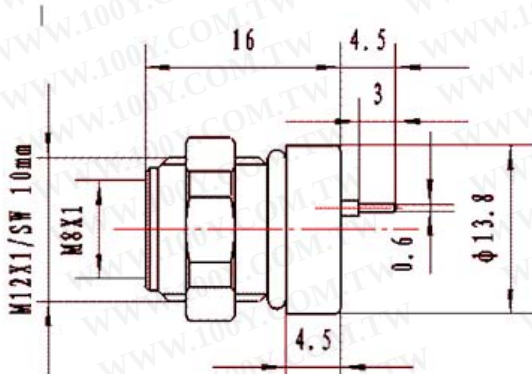

尺寸图




M8孔位图A-code 3,4,6,8芯, B-code 5芯

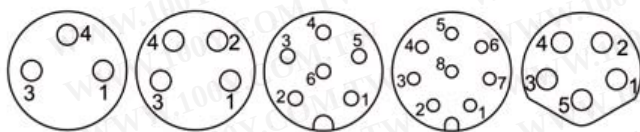

针 数 contacts	订 货 号 ordering-number
3	C08-12423-3S
4	C08-12423-4S
6	C08-12423-6S
8	C08-12423-8S
5	C08-12423-5S-B

M8法兰座，孔，座前螺纹M10X0.75可带屏蔽
Female panel mount connector, front fastened with M10×0.75,
dip solder, with shielding sheet

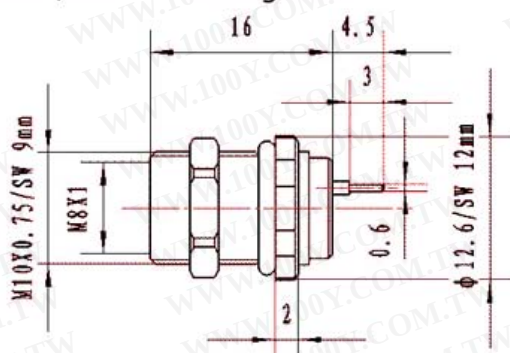

尺寸图




M8孔位图A-code 3,4,6,8芯, B-code 5芯



针 数 contacts	订 货 号 ordering-number
3	C08-12427-3S
4	C08-12427-4S
6	C08-12427-6S
8	C08-12427-8S
5	C08-12427-5S-B

M8法兰座，孔，座前螺纹M12X1，带线
Female panel mount connector, front fastened with M8×1,
with single wires

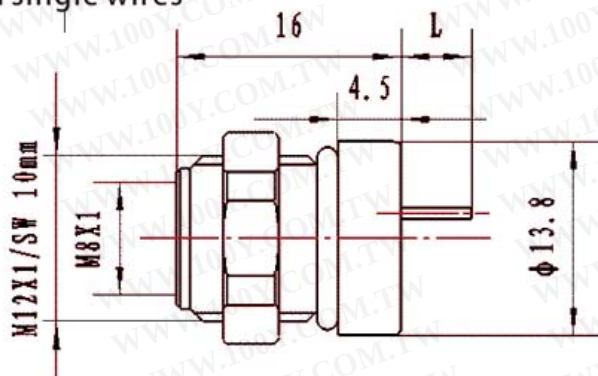

尺寸图




M8孔位图A-code 3,4,6,8芯,
B-code 5芯



针数 contacts	订 货 号 ordering-number
3	C08-12523-3S-L
4	C08-12523-4S-L
6	C08-12523-6S-L
8	C08-12523-8S-L
5	C08-12523-5S-B-L

M8法兰座，孔，座前螺纹M10X0.75可带屏蔽，带线
female panel mount connector, front fastened,
with single wires, with shielding sheet

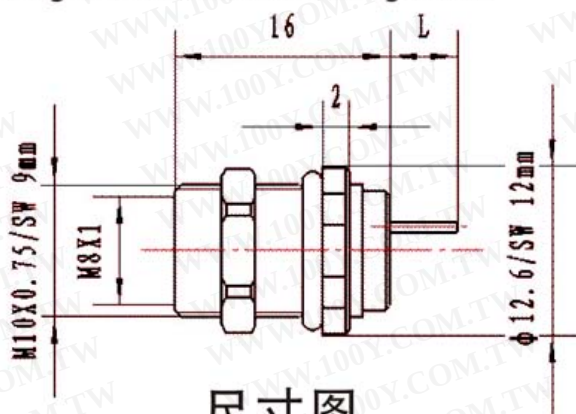

尺寸图




M8孔位图A-code 3,4,6,8芯,
B-code 5芯



针数 contacts	订 货 号 ordering-number
3	C08-12527-3S-L
4	C08-12527-4S-L
6	C08-12527-6S-L
8	C08-12527-8S-L
5	C08-12527-5S-B-L

M8，孔，座后螺纹M8X0.5，焊接

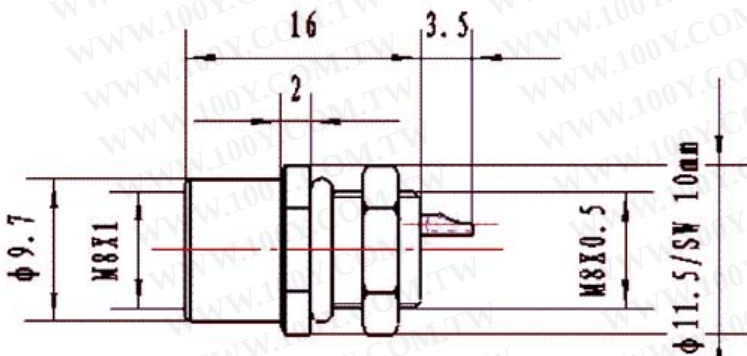

尺寸图




M8孔位图A-code 3,4,6,8芯, B-code 5芯



针数 contacts	订 货 号 ordering-number
3	C08-12324-3S
4	C08-12324-4S
6	C08-12324-6S
8	C08-12324-8S
5	C08-12324-5S-B

法兰座座后

M8, 针, 座后螺纹M10X0.75, 焊接

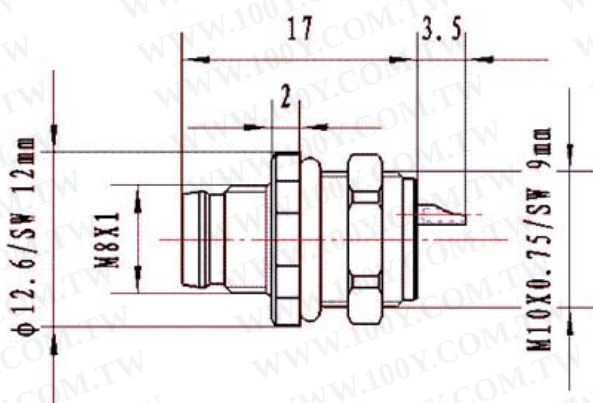


尺寸图

M8针位图A-code 3,4,6,8芯, B-code 5芯



针数 contacts	订 货 号 ordering-number
3	C08-12326-3P
4	C08-12326-4P
6	C08-12326-6P
8	C08-12326-8P
5	C08-12326-5P-B

M8, 针, 座后螺纹M8X0.5, 带线

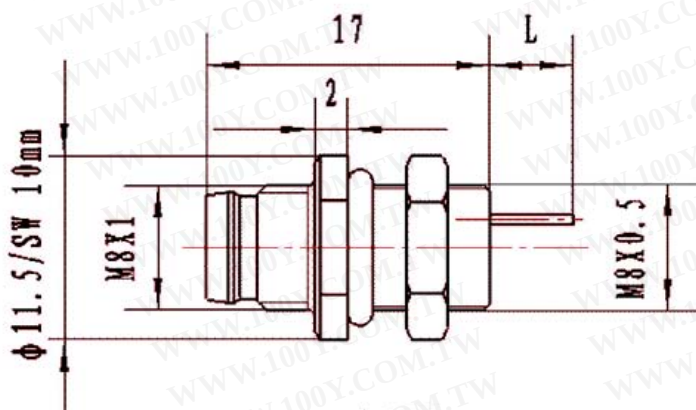


尺寸图

M8针位图A-code 3,4,6,8芯, B-code 5芯



针数 contacts	订 货 号 ordering-number
3	C08-12522-3P-L
4	C08-12522-4P-L
6	C08-12522-6P-L
8	C08-12522-8P-L
5	C08-12522-5P-B-L

M8, 针, 座后螺纹M10X0.75, 带线

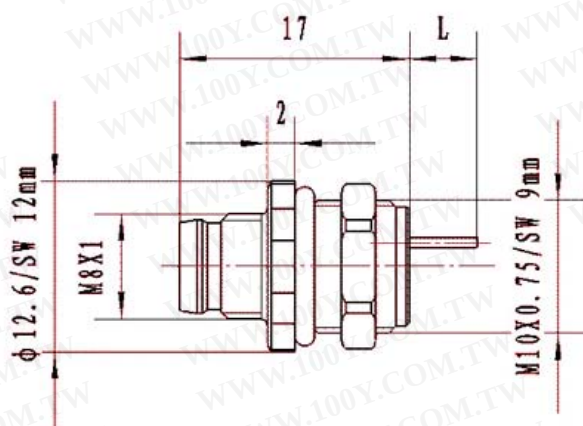


尺寸图

M8针位图A-code 3,4,6,8芯, B-code 5芯




针数 contacts	订 货 号 ordering-number
3	C08-12526-3P-L
4	C08-12526-4P-L
6	C08-12526-6P-L
8	C08-12526-8P-L
5	C08-12526-5P-B-L

M8, 孔, 座后螺纹M10X0.75, 焊接

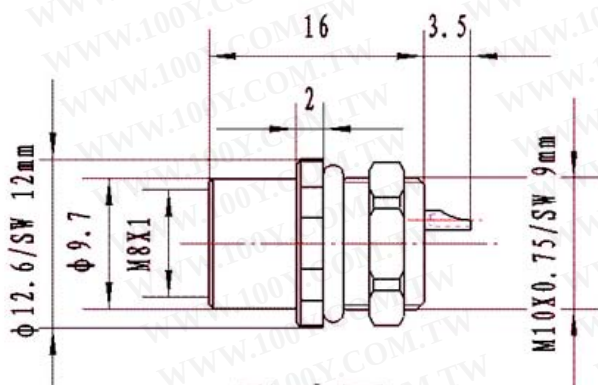


尺寸图

M8孔位图A-code 3,4,6,8芯, B-code 5芯

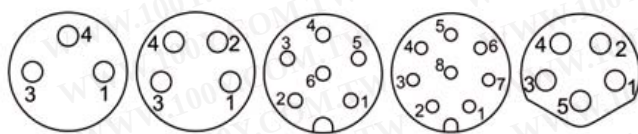

针数 contacts	订货号 ordering-number
3	C08-12328-3S
4	C08-12328-4S
6	C08-12328-6S
8	C08-12328-8S
5	C08-12328-5S-B

M8, 孔, 座后螺纹M8X0.5, 带线

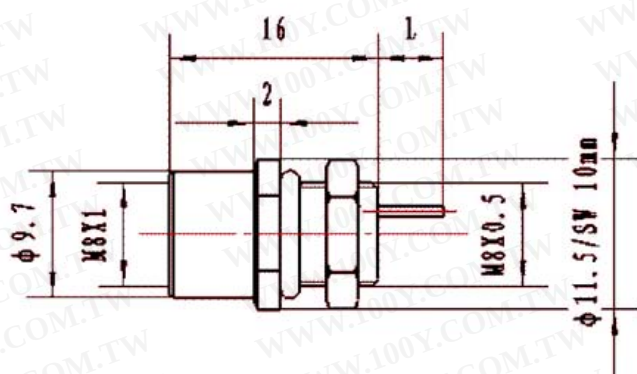

尺寸图




M8孔位图A-code 3,4,6,8芯, B-code 5芯



针数 contacts	订货号 ordering-number
3	C08-12524-3S-L
4	C08-12524-4S-L
6	C08-12524-6S-L
8	C08-12524-8S-L
5	C08-12524-5S-B-L


M8, 孔, 座后螺纹M10X0.75, 带线

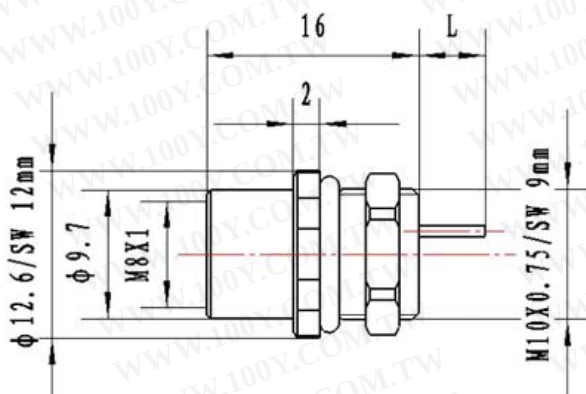

尺寸图



M8孔位图A-code 3,4,6,8芯, B-code 5芯

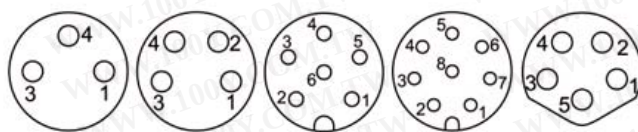

针数 contacts	订 货 号 ordering-number
3	C08-12528-3S-L
4	C08-12528-4S-L
6	C08-12528-6S-L
8	C08-12528-8S-L
5	C08-12528-5S-B-L


M8 系列法兰座技术参数

针数	3	4	5	6	8	Number of contacts
锁紧方式	螺纹式/screw					Connector locking system
接线方式	浸焊, U杯焊接, 带线/dip solder, solder,single wire					Termination
连接截面	最大 0.25平方毫米/max.0.25mm2			最大 0.14平方毫米/max.0.14mm2		Wire gauge
电缆直径	-					Cable outlet
防护等级	IP67					Degree go protection
机械寿命	>100次插拔周期/ >100 mating cycles					Mechanical operation
工作温度	(-25° - 85°)					temperature range
额定电压	60V	30V	30V	30V	30v	Rated voltage
额定冲击电压	800V					Rated impulse voltage
污染等级	3					Pollution degree
过电保护等级	II					Overvoltage categorie
绝缘组别	II					Material group
额定电流 (40°)	3A			1.5A		Rated current(40°)
接触电阻	<=3mΩ (金/gold)					Contact resistance
触点材料	黄铜/brass					Material of contact
触点电镀材料	金/gold					Contact plating
插座材料	尼龙/PA					Material of contact body
外壳材料	铸锌镀镍, 黄铜镀镍/Zinc diecasting nickel plated,brass nickel plated					Material of housing
锁键	A	A	B	A	A	coding key

法兰座座前

M8法兰座, 针, 座前螺纹M8X1, 焊接

Male panel mount connector, front fastened with M8×1, solder

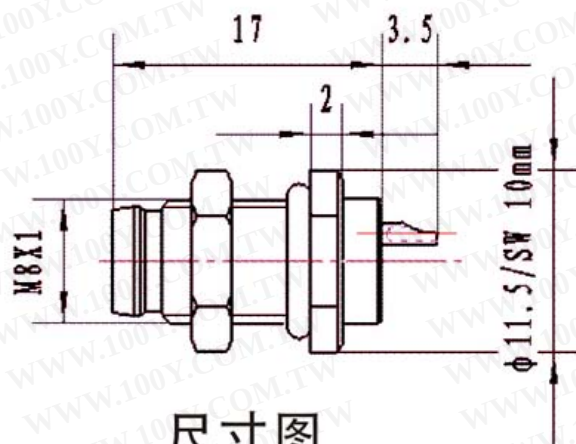

尺寸图




M8针位图A-code 3,4,6,8芯, B-code 5芯




针数 contacts	订 货 号 ordering-number
3	C08-12321-3P
4	C08-12321-4P
6	C08-12321-6P
8	C08-12321-8P
5	C08-12321-5P-B

M8法兰座，针，座前螺纹M8X1，浸焊
Male panel mount connector, front fastened with M8×1, dip solder

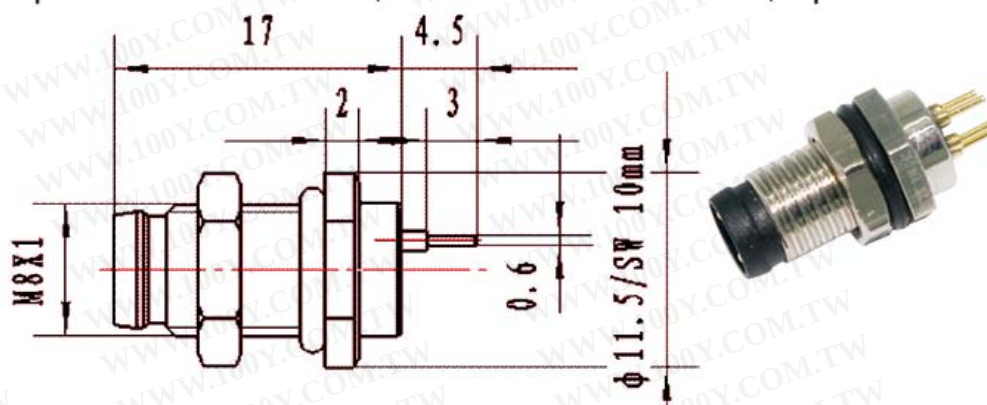


尺寸图

M8针位图A-code 3,4,6,8芯,
B-code 5芯

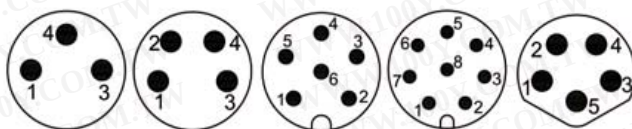

针数 contacts	订货号 ordering-number
3	C08-12421-3P
4	C08-12421-4P
6	C08-12421-6P
8	C08-12421-8P
5	C08-12421-5P-B

M8法兰座，针，座前螺纹M8X1可带屏蔽
Male panel mount connector, front fastened with M8×1,
with shielding sheet

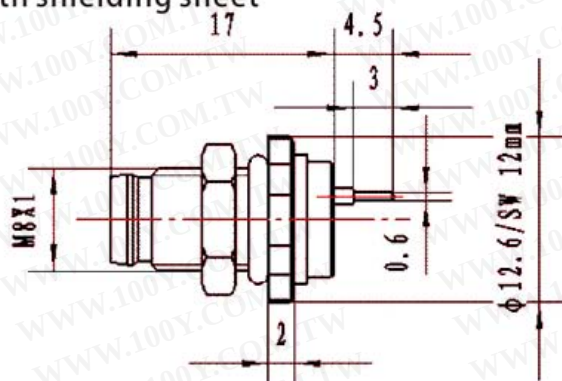


尺寸图

M8针位图A-code 3,4,6,8芯,
B-code 5芯



针数 contacts	订货号 ordering-number
3	C08-12425-3P
4	C08-12425-4P
6	C08-12425-6P
8	C08-12425-8P
5	C08-12425-5P-B

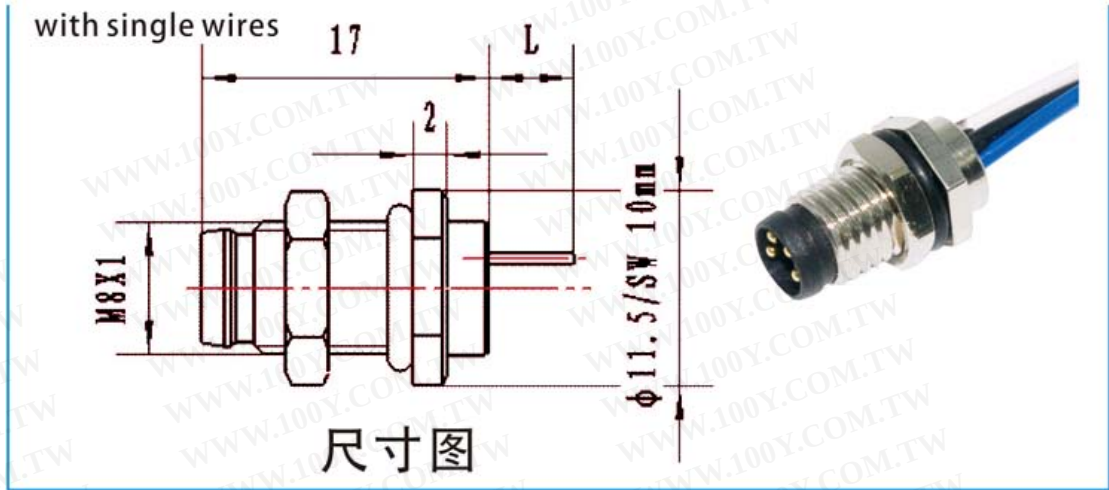


M8针位图A-code 3,4,6,8芯,
B-code 5芯



针数 contacts	订 货 号 ordering-number
3	C08-12521-3P-L
4	C08-12521-4P-L
6	C08-12521-6P-L
8	C08-12521-8P-L
5	C08-12521-5P-B-L

M8法兰座，针，座前螺纹M8X1可带屏蔽，带线
male panel mount connector, front fastened with M8×1
with single wires, with shielding sheet

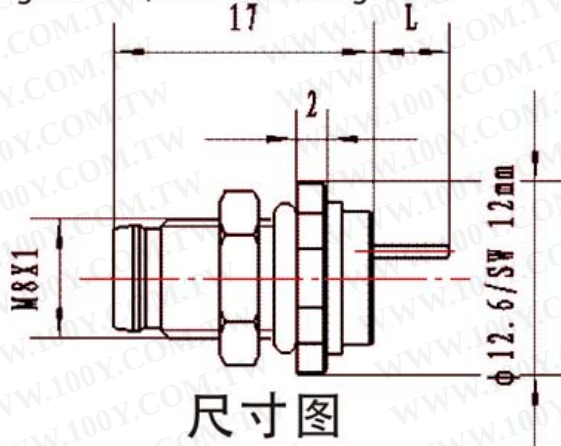


M8针位图A-code 3,4,6,8芯,
B-code 5芯



针数 contacts	订 货 号 ordering-number
3	C08-12525-3P-L
4	C08-12525-4P-L
6	C08-12525-6P-L
8	C08-12525-8P-L
5	C08-12525-5P-B-L

M8法兰座，针，座后螺纹M8X0.5，焊接

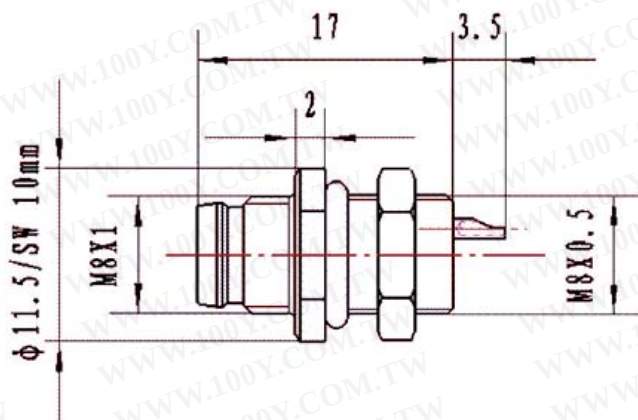

尺寸图


M8针位图A-code 3,4,6,8芯,
B-code 5芯



针 数 contacts	订 货 号 ordering-number
3	C08-12322-3P
4	C08-12322-4P
6	C08-12322-6P
8	C08-12322-8P
5	C08-12322-5P-B


M8法兰座，孔，座前螺纹M12X1，焊接

Female panel mount connector, front fastened with M12×1,solder

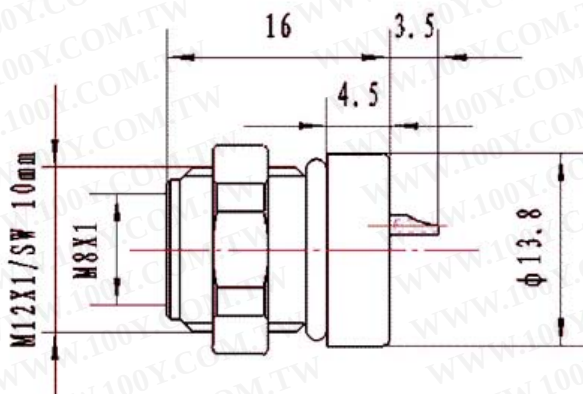


尺寸图

M8孔位图A-code 3,4,6,8芯,
B-code 5芯

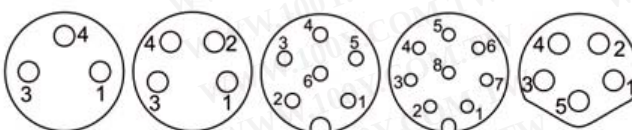

针 数 contacts	订 货 号 ordering-number
3	C08-12323-3S
4	C08-12323-4S
6	C08-12323-6S
8	C08-12323-8S
5	C08-12323-5S-B


M8法兰座，孔，座前螺纹M12X1，浸焊
Female panel mount connector, front fastened with M12×1, dip solder

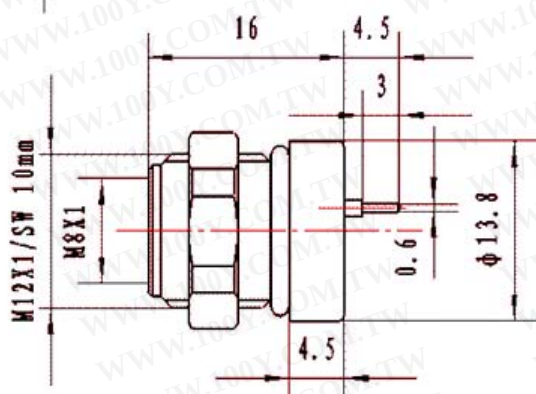

尺寸图




M8孔位图A-code 3,4,6,8芯,
B-code 5芯

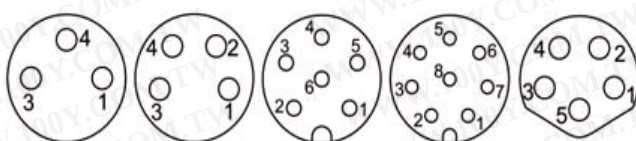

针数 contacts	订 货 号 ordering-number
3	C08-12423-3S
4	C08-12423-4S
6	C08-12423-6S
8	C08-12423-8S
5	C08-12423-5S-B


M8法兰座，孔，座前螺纹M10X0.75可带屏蔽
Female panel mount connector, front fastened with M10×0.75,
dip solder, with shielding sheet

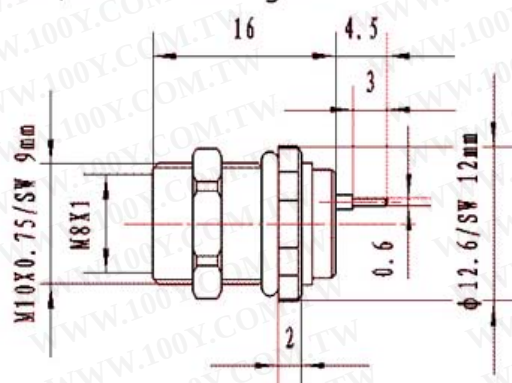

尺寸图




M8孔位图A-code 3,4,6,8芯,
B-code 5芯

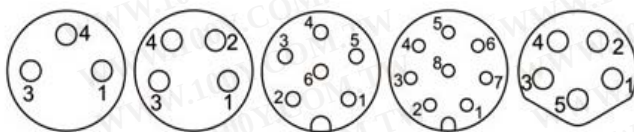


针数 contacts	订 货 号 ordering-number
3	C08-12427-3S
4	C08-12427-4S
6	C08-12427-6S
8	C08-12427-8S
5	C08-12427-5S-B

M8法兰座, 孔, 座前螺纹M12X1, 带线
Female panel mount connector, front fastened with M8×1,
with single wires

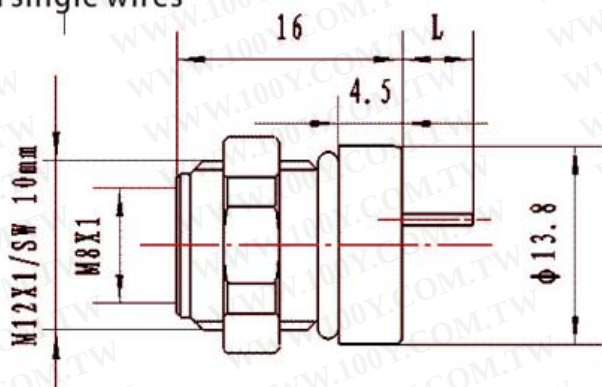


尺寸图

M8孔位图A-code 3,4,6,8芯,
B-code 5芯

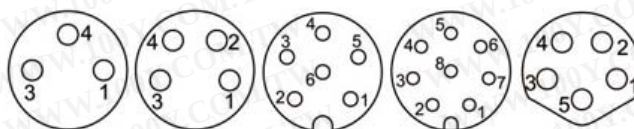

针数 contacts	订 货 号 ordering-number
3	C08-12523-3S-L
4	C08-12523-4S-L
6	C08-12523-6S-L
8	C08-12523-8S-L
5	C08-12523-5S-B-L

M8法兰座, 孔, 座前螺纹M10X0.75可带屏蔽, 带线
female panel mount connector, front fastened,
with single wires, with shielding sheet

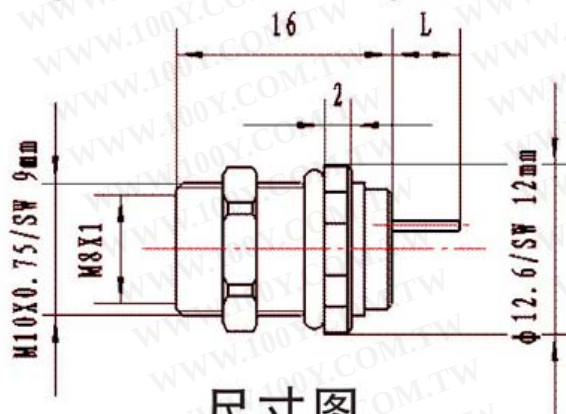


尺寸图

M8孔位图A-code 3,4,6,8芯, B-code 5芯



针数 contacts	订 货 号 ordering-number
3	C08-12527-3S-L
4	C08-12527-4S-L
6	C08-12527-6S-L
8	C08-12527-8S-L
5	C08-12527-5S-B-L

M8, 孔, 座后螺纹M8X0.5, 焊接

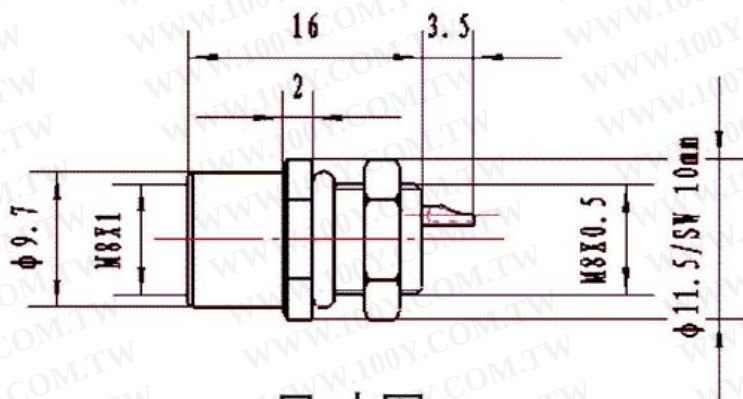

尺寸图




M8孔位图A-code 3,4,6,8芯, B-code 5芯



针数 contacts	订 货 号 ordering-number
3	C08-12324-3S
4	C08-12324-4S
6	C08-12324-6S
8	C08-12324-8S
5	C08-12324-5S-B

法兰座座后

M8, 针, 座后螺纹M10X0.75, 焊接

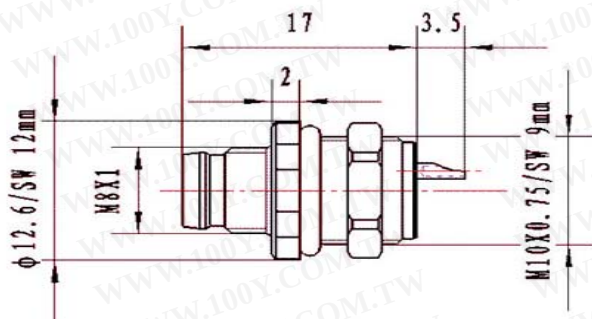

尺寸图




M8针位图A-code 3,4,6,8芯, B-code 5芯



针数 contacts	订 货 号 ordering-number
3	C08-12326-3P
4	C08-12326-4P
6	C08-12326-6P
8	C08-12326-8P
5	C08-12326-5P-B

M8, 针, 座后螺纹M8X0.5, 带线

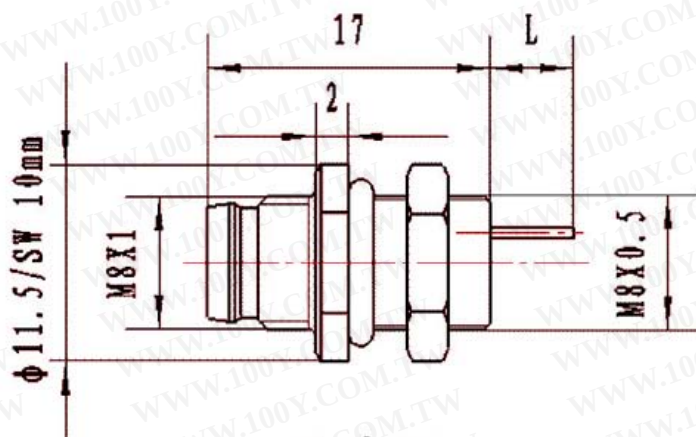


尺寸图

M8针位图A-code 3,4,6,8芯,
B-code 5芯




针数 contacts	订 货 号 ordering-number
3	C08-12522-3P-L
4	C08-12522-4P-L
6	C08-12522-6P-L
8	C08-12522-8P-L
5	C08-12522-5P-B-L

M8, 针, 座后螺纹M10X0.75, 带线

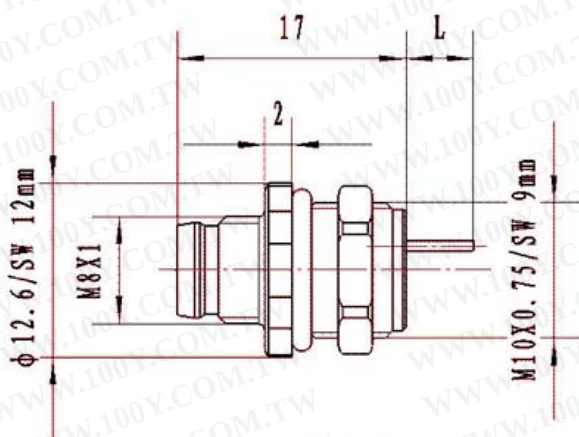


尺寸图

M8针位图A-code 3,4,6,8芯,
B-code 5芯

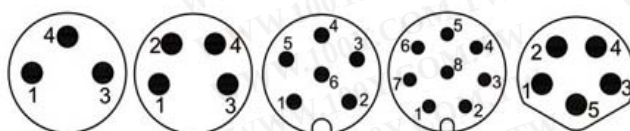


针数 contacts	订 货 号 ordering-number
3	C08-12526-3P-L
4	C08-12526-4P-L
6	C08-12526-6P-L
8	C08-12526-8P-L
5	C08-12526-5P-B-L

M8, 孔, 座后螺纹M10X0.75, 焊接

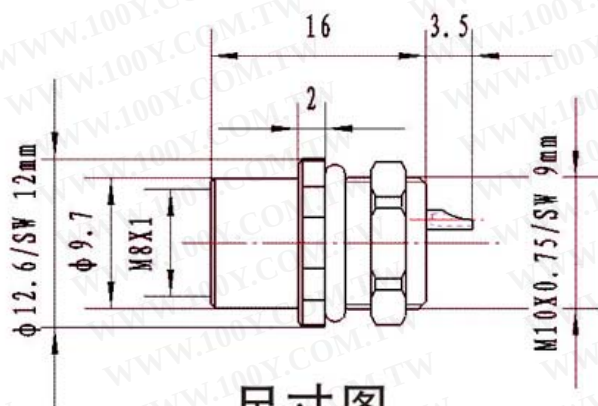


尺寸图

M8孔位图A-code 3,4,6,8芯,
B-code 5芯

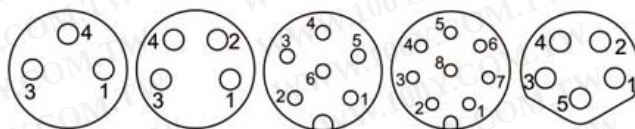


针数 contacts	订 货 号 ordering-number
3	C08-12328-3S
4	C08-12328-4S
6	C08-12328-6S
8	C08-12328-8S
5	C08-12328-5S-B

M8, 孔, 座后螺纹M8X0.5, 带线

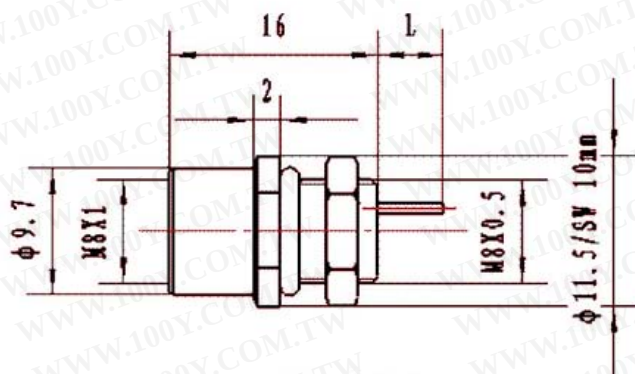


尺寸图

M8孔位图A-code 3,4,6,8芯,
B-code 5芯

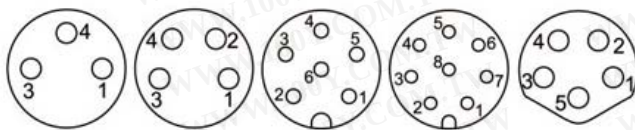

针数 contacts	订 货 号 ordering-number
3	C08-12524-3S-L
4	C08-12524-4S-L
6	C08-12524-6S-L
8	C08-12524-8S-L
5	C08-12524-5S-B-L

M8, 孔, 座后螺纹M10X0.75, 带线

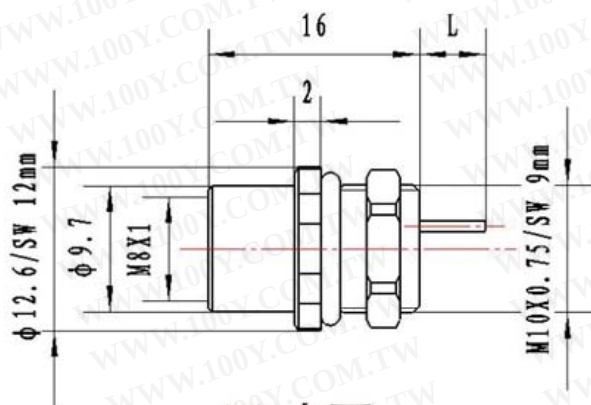

尺寸图

M8孔位图A-code 3,4,6,8芯,
B-code 5芯



针数 contacts	订 货 号 ordering-number
3	C08-12528-3S-L
4	C08-12528-4S-L
6	C08-12528-6S-L
8	C08-12528-8S-L
5	C08-12528-5S-B-L

M8 系列法兰座技术参数

针数	3		4	5	6	8	Number of contacts
锁紧方式	螺纹式/screw						Connector locking system
接线方式	浸焊, U环焊接, 带线/dip solder, solder,single wire						Termination
连接截面	最大 0.25平方毫米/max.0.25mm2				最大 0.14平方毫米/max.0.14mm2		Wire guage
电缆直径	-						Cable outlet
防护等级	IP67						Degree go protection
机械寿命	>100次插拔周期/ >100 mating cycles						Mechanical operation
工作温度	(-25° - 85°)						temperature range
额定电压	60V	30V	30V	30V	30v		Rated voltage
额定冲击电压	800V						Rated impulse voltage
污染等级	3						Pollution degree
过电保护等级	II						Overvoltage categorie
绝缘组别	II						Material group
额定电流 (40°)	3A			1.5A			Rated current(40°)
接触电阻	<=3mΩ (金/gold)						Contact resistance
触点材料	黄铜/brass						Material of contact
触点电镀材料	金/gold						Contact plating
插座材料	尼龙/PA						Material of contact body
外壳材料	铸锌镍, 黄铜镍/Zinc diecasting nickel plated,brass nickel plated						Material of housing
锁键	A	A	B	A	A		coding key

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)