


产品参数



产品名称	航空插针压线钳			
产品型号	IWD-1216	IWD-1620	IWD-2026	IWD-2630
压接方式	四芯轴点式压接			
工具长度	165mm	165mm	165mm	165mm
压接范围	1.31-3.33mm ²	0.51-1.31mm ²	0.12-0.51mm ²	0.05-0.12mm ²
美标AWG	AWG 16-12	AWG 20-16	AWG 26-20	AWG 30-26
钳口直径	5.0mm	3.8mm	2.7mm	2.7mm

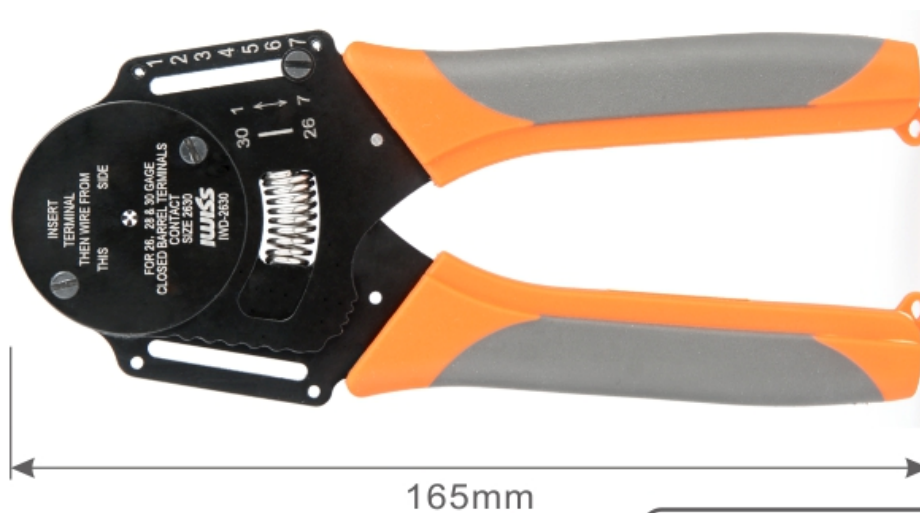

品名 航空插针压线钳

型号 IWD-2630

范围 0.05-0.128mm²(30-26AWG)

长度 165mm



温馨提示：尺寸为手工测量，参数尺寸仅供参考，以实物为准。




品名 航空插针压线钳


型号 IWD-1620

范围 0.51-1.31mm²(20-16AWG)

长度 165mm

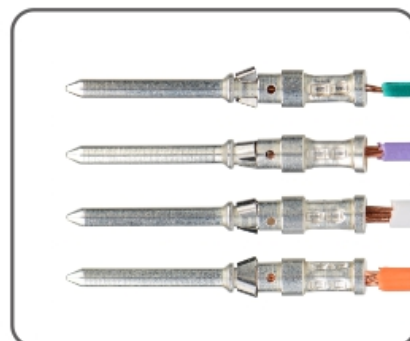

温馨提示：尺寸为手工测量，参数尺寸仅供参考，以实物为准。

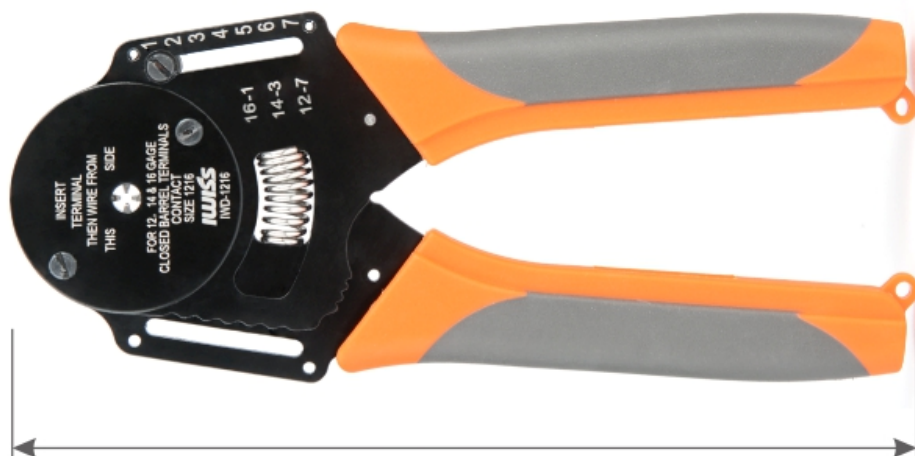


165mm

品名 航空插针压线钳


型号 IWD-1216

范围 13.1-3.33mm²(16-12AWG)

长度 165mm

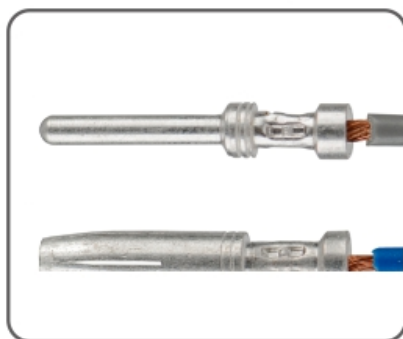

温馨提示：尺寸为手工测量，参数尺寸仅供参考，以实物为准。

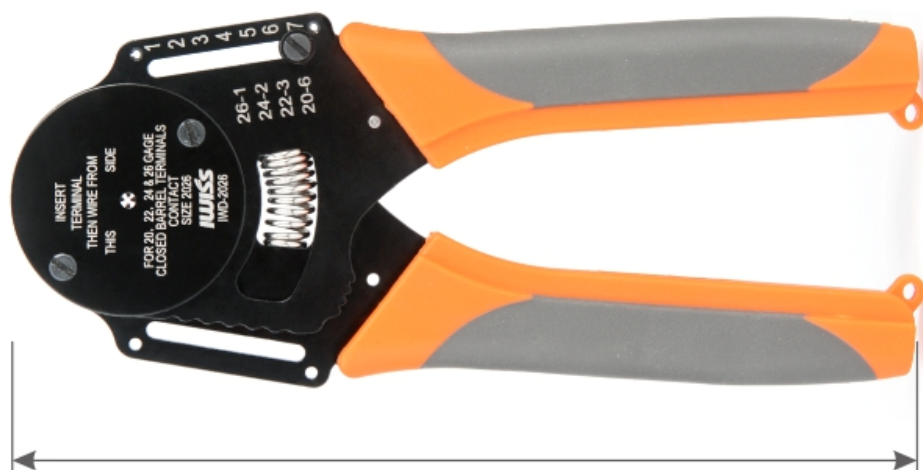

165mm

品名 航空插针压线钳

型号 IWD-2026


范围 0.12-0.51mm²(26-20AWG)

长度 165mm



温馨提示：尺寸为手工测量，参数尺寸仅供参考，以实物为准。

注意事项

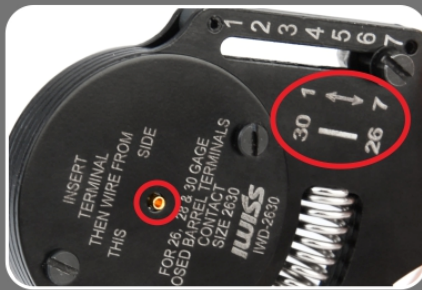


被压接端子需穿过钳口，才可压接。
线规范围在压线钳右下角

产品细节



七档调节
范围更加精准

省力棘轮
使用轻便，高效省力

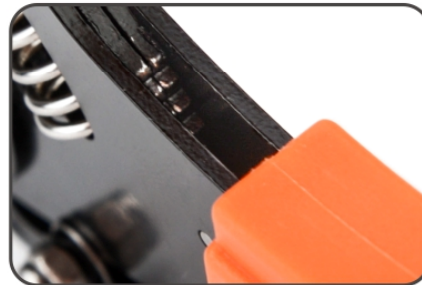

操作步骤




1. 将所需压接的端子放入压接口



2. 将剥好的先插入端子



3. 向内挤压手柄，直到听到“咔”的一声松开手柄

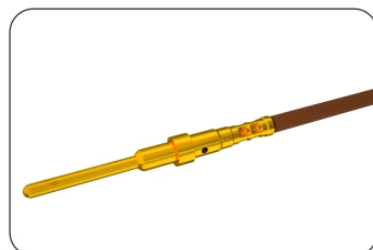

4. 将端子取出，完成压接