





PLS Series - Output Type




勝特力材料 886-3-5753170  
勝特力电子(上海) 86-21-34970699  
勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

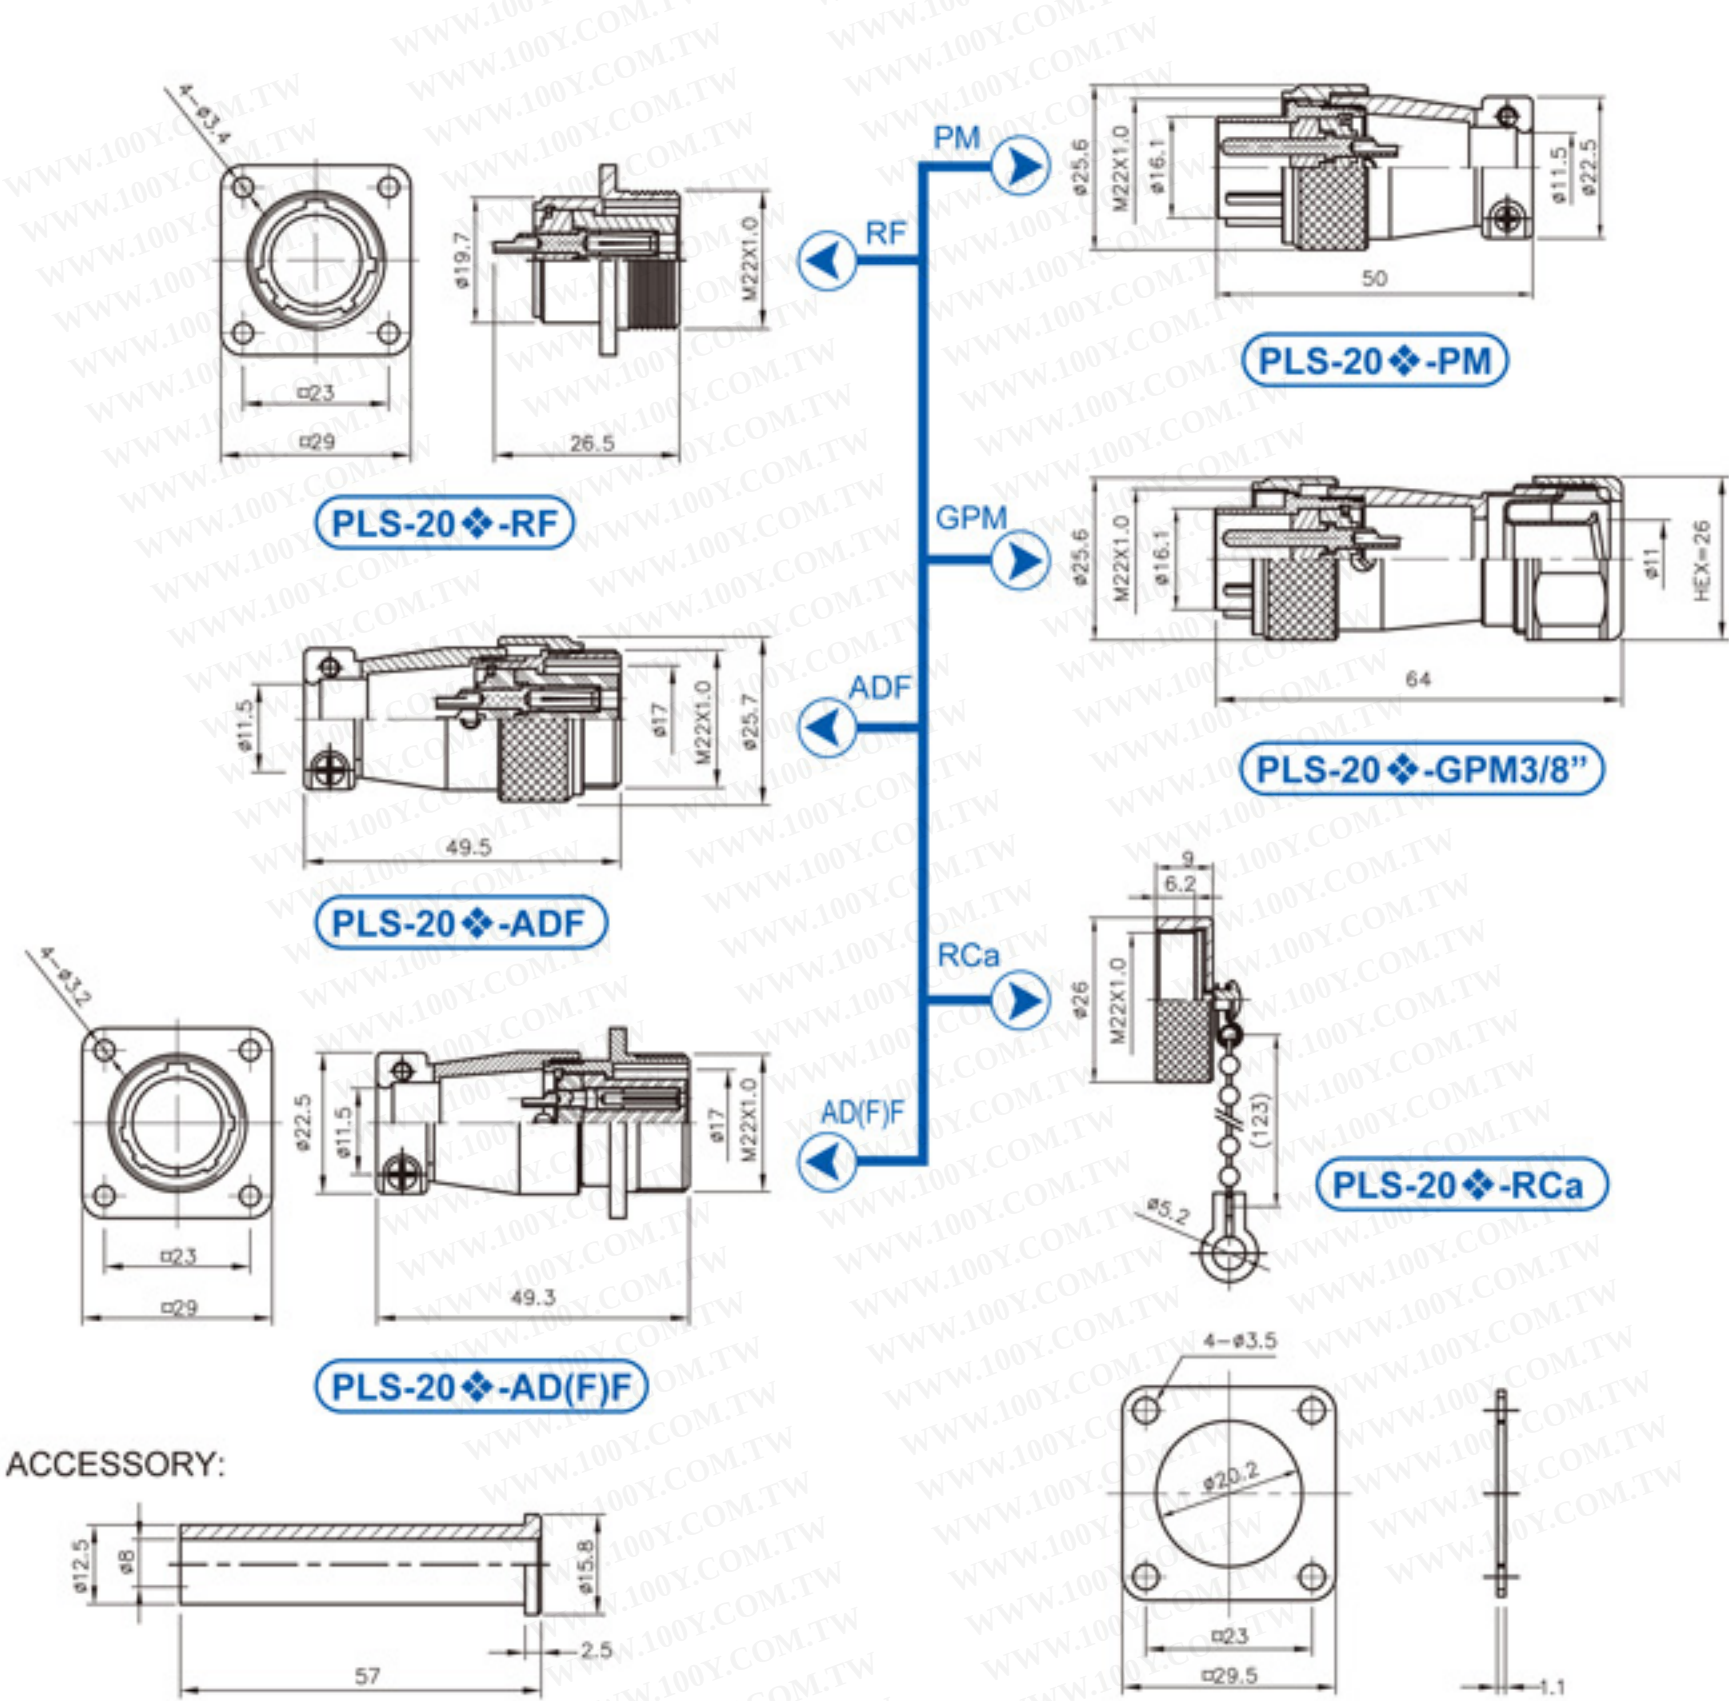

ACCESSORY:

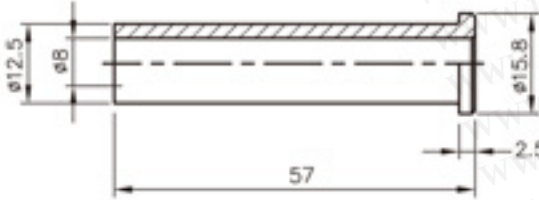

RUBBER PLATE FOR PLS-20-PM

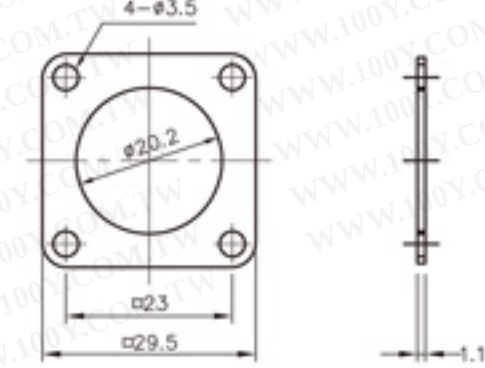

RUBBER TUBE FOR PLS-20-RF

| ◆ No. of contacts                          | 2        | 3        | 4        | 7        |  |  |  |
|--------------------------------------------|----------|----------|----------|----------|--|--|--|
| Contacts Configuration                     |          |          |          |          |  |  |  |
| Rated current / voltage                    | 15A 250V | 15A 250V | 15A 250V | 10A 250V |  |  |  |
| Operation limit voltage (AC.V.rms)         | 250      | 250      | 250      | 250      |  |  |  |
| Withstanding voltage (AC.V.rms) 1 minute   | 1500     | 1500     | 1500     | 1000     |  |  |  |
| Insulation resistance (MΩ MIN.) at DC 500V | 2000     | 2000     | 2000     | 2000     |  |  |  |
| Contact resistance (MΩ MAX.) at DC 1A      | 3        | 3        | 3        | 3        |  |  |  |
| Solder inter diameter                      | 1.8      | 1.8      | 1.6      | 1.6      |  |  |  |