


勝特力電材超市-龍山店 886-3-5773766
 勝特力電材超市-光復店 886-3-5729570
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
<http://www.100y.com.tw>

威浦 WEIPU WP20 母插座

● 插座: Z IP44 Receptacle: Z IP44

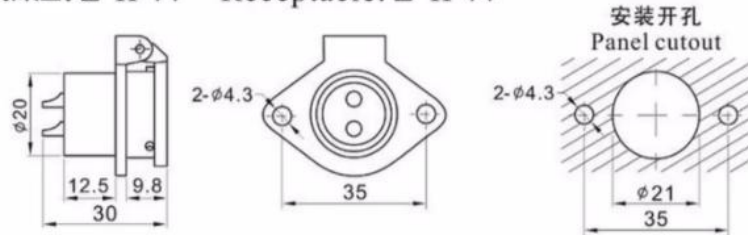

焊接芯件参数表
Solder contact spec

芯数 Number of contact	2	3	4	5	5B	5C	6	6B	7	8	9	12	15
公端绝缘体正面图 Male contact face view													
额定电流(A) Rated current (A)	30	30	30	30	30	15	25	30	15	10	5	5	5
接触件直径 (mm) Contact diameter (mm)	ø3X2	ø3X3	ø3X4	ø3X5	ø3X2	ø2X5	ø2.5X4	ø3X2	ø2X7	ø1.5X8	ø1X9	ø1X12	ø1X15
工作电压 (AC.V) Rated voltage (AC.V)	500	500	500	500	500	500	500	500	500	500	400	400	400
耐压 (AC.V) 1 min Test voltage (AC.V) 1 min	1500	1500	1500	1500	1500	1500	1500	1500	1500	1500	1200	1200	1200
接触电阻 (mΩ) Contact resistance (mΩ)	1	1	1	1	1	2.5	1	1	2.5	2.5	5	5	5
接线方式 Termination	焊接/螺钉 solder/screw	焊接/螺钉 solder/screw	焊接/螺钉 solder/screw	焊接/螺钉 solder/screw	焊接 solder	焊接 solder	焊接 solder	焊接 solder	焊接 solder	焊接 solder	焊接 solder	焊接 solder	焊接 solder
焊接线径 (mm²/AWG) Wire size for solder (mm²/AWG)	≤4/11	≤4/11	≤4/11	≤4/11	≤4/11	≤2/14	≤4/11	4/11	≤2/14	≤2/14	≤0.75/18	≤0.75/18	≤0.75/18
螺丝压接线径 (mm²/AWG) Wire size for screw termination (mm²/AWG)	≤1.5/15	≤1.5/15	≤1.5/15	≤1.5/15	/	/	/	/	/	/	/	/	/

WP20 插座Z

铜针镀金 焊锡接线 耐插拔



注: 产品均为手工测量, 误差±0.5mm