

EDS-208A

MOXA_8 口工業交換機

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)



產品說明

EDS-208A/205A 系列是入門級 8 口或 5 口工業以太網交換機，支持 IEEE802.3/802.3u/802.3x，10/100M，全/半雙工，MDI /MDI-X 自適應 RJ45 端口。EDS-208A/205A 系列交換機提供兩路 9.6~60 VDC，18~30VAC 冗餘電源輸入，可以同時連接到直流或者交流電源。此外 EDS-208A/205A 交換機可以在-10~60 °C 的溫度下工作具有 IP30 防護等級，適合任何工業環境。EDS-208A/205A 具有撥碼開關，可以啓用或者禁用廣播風暴保護功能，爲不同的工業應用提供另外一種靈活的解決方案。EDS-208A/205A 交換機很容易的安裝在導軌或者分配櫃中。導軌安裝能力，寬溫和 IP30 防護等級使得這些即插即用的交換機很容易使用和非常的可靠

產品特點

- 10/100BaseT(X)(RJ45)，100BaseFX (SC 或 ST 接口，多模)
- 支持 IEEE802.3/802.3u/802.3x
- 冗餘 12/24/48 VDC，18 ~ 30VAC 功率輸入
- IP30 金屬外殼 (EDS-208A/205A 系列)
- 工作溫度-10 ~ 60 °C

技術參數標準：IEEE 802.3 10BaseT

IEEE 802.3u 100BaseT(X)，100BaseFX

IEEE 802.3x 流量控制

處理類型：存儲和轉發

流控：IEEE802.3x 流控，背壓式流控

接口 RJ45 端口：10/100BaseT(X) 自動偵測，全/半雙工，MDI/MDI-X 自適應

光纖端口：100BaseFX 端口(SC/ST 接頭；多模)

LED 指示燈：Power，10/100M(電口)，和 100M(光口)

光纖距離：0 ~ 5 km，1300 nm (50/125μm，800 MHz*km)

0 ~ 4 km，1300 nm (62.5/125μm，500 MHz*km)

最小 TX 輸出：-20 dBm(多模)

最大 TX 輸出：-14 dBm(多模)

靈敏度：-34 ~ -30 dBm(多模)

電源 EDS-208A/205A 系列

輸入電壓：9.6 ~ 60 VDC，18 ~ 36 VAC (47 ~ 63 Hz)

連接器：可插拔的 4 針接線端子

反接保護：提供

EDS-208/205 系列

輸入電壓：12 ~ 45 VDC，18 ~ 30 VAC (47 ~ 63 Hz)

輸入電流(@ 24 V)：0.12A (EDS-205)，0.14A (EDS-208)，0.23A (EDS-208-M)

連接器：可插拔的 3 芯端子排

過載電流保護：1.1A

反接保護：提供

機械特性外殼：IP30 防護等級，塑料外殼

尺寸 (W x H x D)：

EDS-208A：50 x 115 x 70 mm (1.96 x 4.52 x 3.74 in)

EDS-205A：30 x 115 x 70 mm (1.18 x 4.52 x 3.74 in)

EDS-208：40 x 109 x 95 mm (1.57 x 4.29 x 3.74 in)

EDS-205：25 x 109 x 88 mm (0.98 x 4.29 x 3.46 in)

重量：EDS-208：170g

EDS-205：135g

安裝方式：導軌安裝

工作環境工作溫度：-10 ~ 60 °C (14 ~ 140 °F)

儲存溫度：-40 ~ 70 °C (-40 ~ 185 °F)

相對濕度：5 ~ 95% (無凝露)

通過認證安全：EDS-208 系列：UL508，UL60950-1

EDS-205：UL508

EMI：FCC Part 15，CISPR (EN55022) class A

EMS：EN61000-4-2 (ESD)

EN61000-4-3 (RS)

EN61000-4-4 (EFT)

EN61000-4-5 (Surge)

EN61000-4-6 (CS)

EN61000-4-8

EN61000-4-11

EN61000-4-11

衝擊：IEC60068-2-27

自由落體：IEC60068-2-32

震動：IEC60068-2-6

MTBF：EDS-208 系列：368,000 小時

數據庫：MIL-HDBK-217F，GB 25 °C

EDS-205：323,000 小時

數據庫：Telcordia (Bellcore)，GB

勝 特 力 材 料 886-3-5753170

勝特力电子(上海) 86-21-34970699

勝特力电子(深圳) 86-755-83298787

[Http://www.100y.com.tw](http://www.100y.com.tw)

EDS-205A Series

5-port unmanaged Ethernet switches



Features and Benefits

- 10/100BaseT(X) (RJ45 connector), 100BaseFX (multi/single-mode, SC or ST connector)
- Redundant dual 12/24/48 VDC power inputs
- IP30 aluminum housing
- Rugged hardware design well suited for hazardous locations (Class 1 Div. 2/ ATEX Zone 2), transportation (NEMA TS2/EN 50121-4/e-Mark), and maritime environments (DNV/GL/LR/ABS/NK)
- -40 to 75°C operating temperature range (-T models)

Certifications



Introduction

The EDS-205A Series 5-port industrial Ethernet switches support IEEE 802.3 and IEEE 802.3u/x with 10/100M full/half-duplex, MDI/MDI-X auto-sensing. The EDS-205A Series has 12/24/48 VDC (9.6 to 60 VDC) redundant power inputs that can be connected simultaneously to live DC power sources. These switches have been designed for harsh industrial environments, such as in maritime (DNV/GL/LR/ABS/NK), rail wayside, highway, or mobile applications (EN 50121-4/NEMA TS2/e-Mark), or hazardous locations (Class I Div. 2, ATEX Zone 2) that comply with FCC, UL, and CE standards.

The EDS-205A switches are available with a standard operating temperature range from -10 to 60°C, or with a wide operating temperature range from -40 to 75°C. All models are subjected to a 100% burn-in test to ensure that they fulfill the special needs of industrial automation control applications. In addition, the EDS-205A switches have DIP switches for enabling or disabling broadcast storm protection, providing another level of flexibility for industrial applications.

Specifications

Ethernet Interface

10/100BaseT(X) Ports (RJ45 connector)	EDS-205A/205A-T: 5 EDS-205A-M-SC/M-ST/S-SC Series: 4 All models support: Auto negotiation speed Full/half duplex mode Auto MDI/MDI-X connection
100BaseFX Ports (multi-mode SC connector)	EDS-205A-M-SC Series: 1
100BaseFX Ports (multi-mode ST connector)	EDS-205A-M-ST Series: 1
100BaseFX Ports (single-mode SC connector)	EDS-205A-S-SC Series: 1

Standards	IEEE 802.3 for 10BaseT IEEE 802.3u for 100BaseT(X) and 100BaseFX IEEE 802.3x for flow control			
Optical Fiber			100BaseFX	
			Multi-Mode	Single-Mode
	Fiber Cable Type		OM1	50/125 μ m
				800 MHz x km
	Typical Distance		4 km	5 km
	Wavelength	Typical (nm)	1300	1310
		TX Range (nm)	1260 to 1360	1280 to 1340
		RX Range (nm)	1100 to 1600	1100 to 1600
	Optical Power	TX Range (dBm)	-10 to -20	0 to -5
		RX Range (dBm)	-3 to -32	-3 to -34
		Link Budget (dB)	12	29
		Dispersion Penalty (dB)	3	1
	Note: When connecting a single-mode fiber transceiver, we recommend using an attenuator to prevent damage caused by excessive optical power. Note: Compute the “typical distance” of a specific fiber transceiver as follows: Link budget (dB) > dispersion penalty (dB) + total link loss (dB).			

Switch Properties

MAC Table Size	1 K
Packet Buffer Size	384 kbits
Processing Type	Store and Forward

Power Parameters

Connection	1 removable 4-contact terminal block(s)
Input Current	EDS-205A/205A-T: 0.09 A @ 24 VDC EDS-205A-M-SC/M-ST/S-SC Series: 0.1 A @ 24 VDC
Input Voltage	12/24/48 VDC, Redundant dual inputs
Operating Voltage	9.6 to 60 VDC
Overload Current Protection	Supported
Reverse Polarity Protection	Supported

DIP Switch Configuration

Ethernet Interface	Broadcast storm protection
--------------------	----------------------------

Physical Characteristics

Housing	Aluminum
IP Rating	IP30
Dimensions	30 x 115 x 70 mm (1.18 x 4.52 x 2.76 in)
Weight	175 g (0.39 lb)
Installation	DIN-rail mounting, Wall mounting (with optional kit)

Environmental Limits

Operating Temperature	Standard Models: -10 to 60°C (14 to 140°F) Wide Temp. Models: -40 to 75°C (-40 to 167°F)
Storage Temperature (package included)	-40 to 85°C (-40 to 185°F)
Ambient Relative Humidity	5 to 95% (non-condensing)

Standards and Certifications

EMC	EN 55032/24
EMI	CISPR 32, FCC Part 15B Class A
EMS	IEC 61000-4-2 ESD: Contact: 6 kV; Air: 8 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 10 V/m IEC 61000-4-4 EFT: Power: 2 kV; Signal: 1 kV IEC 61000-4-5 Surge: Power: 2 kV; Signal: 2 kV IEC 61000-4-6 CS: 10 V IEC 61000-4-8 PFMF
Hazardous Locations	IECEx, ATEX, Class I Division 2
Maritime	ABS, DNV-GL, LR, NK
Railway	EN 50121-4
Safety	UL 508
Shock	IEC 60068-2-27
Traffic Control	NEMA TS2
Vibration	IEC 60068-2-6
Freefall	IEC 60068-2-31

MTBF

Time	3,040,784 hrs
Standards	Telcordia (Bellcore), GB

Warranty


Warranty Period	5 years
Details	See www.moxa.com/warranty

Package Contents

Device	1 x EDS-205A Series switch
Documentation	1 x quick installation guide 1 x warranty card

Dimensions

Unit: mm (inch)

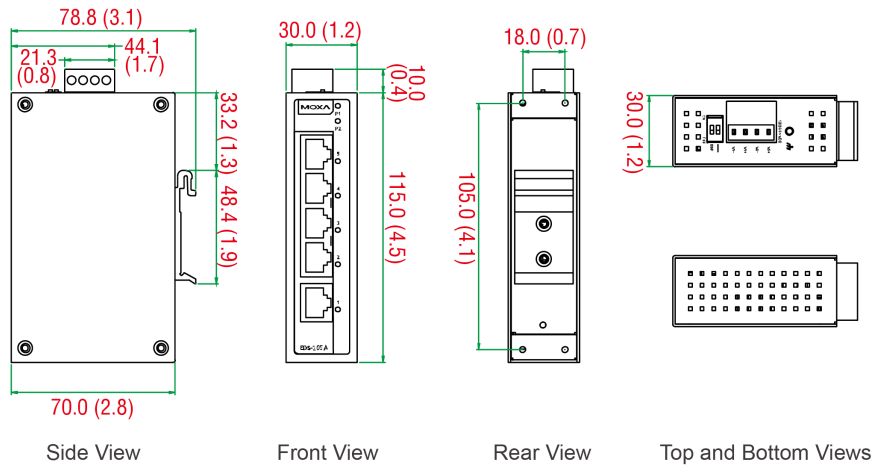

Ordering Information

Model Name	10/100BaseT(X) Ports RJ45 Connector	100BaseFX Ports Multi-Mode, SC Connector	100BaseFX Ports Multi-Mode, ST Connector	100BaseFX Ports Single-Mode, SC Connector	Operating Temp.
EDS-205A	5	–	–	–	-10 to 60°C
EDS-205A-T	5	–	–	–	-40 to 75°C
EDS-205A-M-SC	4	1	–	–	-10 to 60°C
EDS-205A-M-SC-T	4	1	–	–	-40 to 75°C
EDS-205A-M-ST	4	–	1	–	-10 to 60°C
EDS-205A-M-ST-T	4	–	1	–	-40 to 75°C
EDS-205A-S-SC	4	–	–	1	-10 to 60°C
EDS-205A-S-SC-T	4	–	–	1	-40 to 75°C

Accessories (sold separately)

Power Supplies

DR-120-24	120W/2.5A DIN-rail 24 VDC power supply with universal 88 to 132 VAC or 176 to 264 VAC input by switch, or 248 to 370 VDC input, -10 to 60°C operating temperature
DR-4524	45W/2A DIN-rail 24 VDC power supply with universal 85 to 264 VAC or 120 to 370 VDC input, -10 to 50°C operating temperature
DR-75-24	75W/3.2A DIN-rail 24 VDC power supply with universal 85 to 264 VAC or 120 to 370 VDC input, -10 to 60°C operating temperature
MDR-40-24	DIN-rail 24 VDC power supply with 40W/1.7A, 85 to 264 VAC, or 120 to 370 VDC input, -20 to 70°C operating temperature
MDR-60-24	DIN-rail 24 VDC power supply with 60W/2.5A, 85 to 264 VAC, or 120 to 370 VDC input, -20 to 70°C operating temperature

Wall-Mounting Kits

WK-30	Wall-mounting kit, 2 plates, 4 screws, 40 x 30 x 1 mm
WK-46	Wall-mounting kit, 2 plates, 8 screws, 46.5 x 66.8 x 1 mm

Rack-Mounting Kits

RK-4U	19-inch rack-mounting kit
-------	---------------------------

© Moxa Inc. All rights reserved. Updated Jan 30, 2019.

This document and any portion thereof may not be reproduced or used in any manner whatsoever without the express written permission of Moxa Inc. Product specifications subject to change without notice. Visit our website for the most up-to-date product information.

EDS-208A Series

8-port compact unmanaged Ethernet switches



Features and Benefits

- 10/100BaseT(X) (RJ45 connector), 100BaseFX (multi/single-mode, SC or ST connector)
- Redundant dual 12/24/48 VDC power inputs
- IP30 aluminum housing
- Rugged hardware design well suited for hazardous locations (Class 1 Div. 2/ ATEX Zone 2), transportation (NEMA TS2/EN 50121-4/e-Mark), and maritime environments (DNV/GL/LR/ABS/NK)
- -40 to 75°C operating temperature range (-T models)

Certifications



Introduction

The EDS-208A Series 8-port industrial Ethernet switches support IEEE 802.3 and IEEE 802.3u/x with 10/100M full/half-duplex, MDI/MDI-X auto-sensing. The EDS-208A Series has 12/24/48 VDC (9.6 to 60 VDC) redundant power inputs that can be connected simultaneously to live DC power sources. These switches have been designed for harsh industrial environments, such as in maritime (DNV/GL/LR/ABS/NK), rail wayside, highway, or mobile applications (EN 50121-4/NEMA TS2/e-Mark), or hazardous locations (Class I Div. 2, ATEX Zone 2) that comply with FCC, UL, and CE standards.

The EDS-208A switches are available with a standard operating temperature range from -10 to 60°C, or with a wide operating temperature range from -40 to 75°C. All models are subjected to a 100% burn-in test to ensure that they fulfill the special needs of industrial automation control applications. In addition, the EDS-208A switches have DIP switches for enabling or disabling broadcast storm protection, providing another level of flexibility for industrial applications.

Specifications

Ethernet Interface

10/100BaseT(X) Ports (RJ45 connector)	EDS-208A/208A-T: 8 EDS-208A-M-SC/M-ST/S-SC Series: 7 EDS-208A-MM-SC/MM-ST/SS-SC Series: 6 All models support: Auto negotiation speed Full/Half duplex mode Auto MDI/MDI-X connection
100BaseFX Ports (multi-mode SC connector)	EDS-208A-M-SC Series: 1 EDS-208A-MM-SC Series: 2
100BaseFX Ports (multi-mode ST connector)	EDS-208A-M-ST Series: 1 EDS-208A-MM-ST Series: 2
100BaseFX Ports (single-mode SC connector)	EDS-208A-S-SC Series: 1 EDS-208A-SS-SC Series: 2

Standards	IEEE 802.3 for 10BaseT IEEE 802.3u for 100BaseT(X) and 100BaseFX IEEE 802.3x for flow control			
Optical Fiber			100BaseFX	
			Multi-Mode	Single-Mode
	Fiber Cable Type		OM1	50/125 μ m
				800 MHz x km
	Typical Distance		4 km	5 km
	Wavelength	Typical (nm)	1300	1310
		TX Range (nm)	1260 to 1360	1280 to 1340
		RX Range (nm)	1100 to 1600	1100 to 1600
	Optical Power	TX Range (dBm)	-10 to -20	0 to -5
		RX Range (dBm)	-3 to -32	-3 to -34
		Link Budget (dB)	12	29
		Dispersion Penalty (dB)	3	1
	Note: When connecting a single-mode fiber transceiver, we recommend using an attenuator to prevent damage caused by excessive optical power. Note: Compute the “typical distance” of a specific fiber transceiver as follows: Link budget (dB) > dispersion penalty (dB) + total link loss (dB).			

Switch Properties

MAC Table Size	2 K
Packet Buffer Size	768 kbits
Processing Type	Store and Forward

Power Parameters

Connection	1 removable 4-contact terminal block(s)
Input Current	EDS-208A/208A-T, EDS-208A-M-SC/M-ST/S-SC Series: 0.11 A @ 24 VDC EDS-208A-MM-SC/MM-ST/SS-SC Series: 0.15 A @ 24 VDC
Input Voltage	12/24/48 VDC, Redundant dual inputs
Operating Voltage	9.6 to 60 VDC
Overload Current Protection	Supported
Reverse Polarity Protection	Supported

DIP Switch Configuration

Ethernet Interface	Broadcast storm protection
--------------------	----------------------------

Physical Characteristics

Housing	Aluminum
IP Rating	IP30
Dimensions	50 x 114 x 70 mm (1.96 x 4.49 x 2.76 in)
Weight	275 g (0.61 lb)
Installation	DIN-rail mounting, Wall mounting (with optional kit)

Environmental Limits

Operating Temperature	Standard Models: -10 to 60°C (14 to 140°F) Wide Temp. Models: -40 to 75°C (-40 to 167°F)
Storage Temperature (package included)	-40 to 85°C (-40 to 185°F)
Ambient Relative Humidity	5 to 95% (non-condensing)

Standards and Certifications

EMC	EN 55032/24
EMI	CISPR 32, FCC Part 15B Class A
EMS	IEC 61000-4-2 ESD: Contact: 6 kV; Air: 8 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 10 V/m IEC 61000-4-4 EFT: Power: 2 kV; Signal: 1 kV IEC 61000-4-5 Surge: Power: 2 kV; Signal: 2 kV IEC 61000-4-6 CS: 10 V IEC 61000-4-8 PFMF
Hazardous Locations	ATEX, Class I Division 2
Maritime	ABS, DNV-GL, LR, NK
Railway	EN 50121-4
Safety	UL 508
Shock	IEC 60068-2-27
Traffic Control	NEMA TS2
Vibration	IEC 60068-2-6
Freefall	IEC 60068-2-31

MTBF

Time	2,701,531 hrs
Standards	Telcordia (Bellcore), GB

Warranty


Warranty Period	5 years
Details	See www.moxa.com/warranty

Package Contents

Device	1 x EDS-208A Series switch
Documentation	1 x quick installation guide 1 x warranty card

Dimensions

Unit: mm (inch)

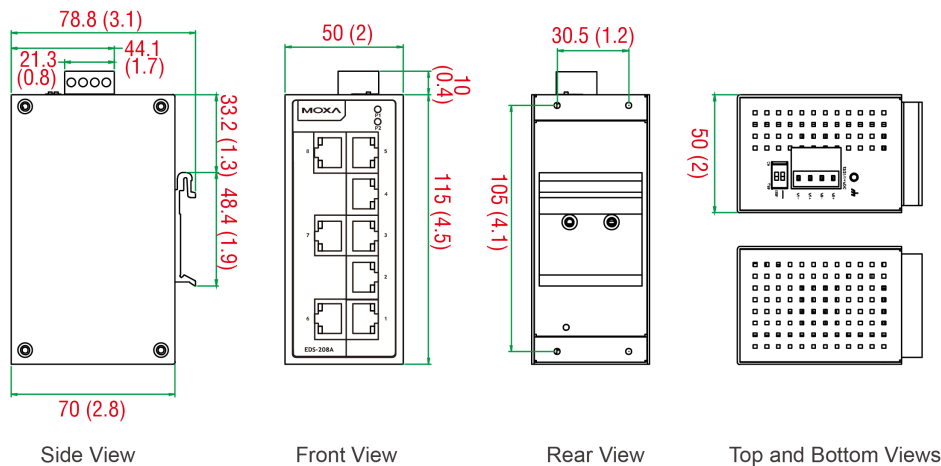

Ordering Information

Model Name	10/100BaseT(X) Ports RJ45 Connector	100BaseFX Ports Multi-Mode, SC Connector	100BaseFX Ports Multi-Mode, ST Connector	100BaseFX Ports Single-Mode, SC Connector	Operating Temp.
EDS-208A	8	–	–	–	-10 to 60°C
EDS-208A-T	8	–	–	–	-40 to 75°C
EDS-208A-M-SC	7	1	–	–	-10 to 60°C
EDS-208A-M-SC-T	7	1	–	–	-40 to 75°C
EDS-208A-M-ST	7	–	1	–	-10 to 60°C
EDS-208A-M-ST-T	7	–	1	–	-40 to 75°C
EDS-208A-MM-SC	6	2	–	–	-10 to 60°C
EDS-208A-MM-SC-T	6	2	–	–	-40 to 75°C
EDS-208A-MM-ST	6	–	2	–	-10 to 60°C
EDS-208A-MM-ST-T	6	–	2	–	-40 to 75°C
EDS-208A-S-SC	7	–	–	1	-10 to 60°C
EDS-208A-S-SC-T	7	–	–	1	-40 to 75°C
EDS-208A-SS-SC	6	–	–	2	-10 to 60°C
EDS-208A-SS-SC-T	6	–	–	2	-40 to 75°C

Accessories (sold separately)

Power Supplies

DR-120-24	120W/2.5A DIN-rail 24 VDC power supply with universal 88 to 132 VAC or 176 to 264 VAC input by switch, or 248 to 370 VDC input, -10 to 60°C operating temperature
DR-4524	45W/2A DIN-rail 24 VDC power supply with universal 85 to 264 VAC or 120 to 370 VDC input, -10 to 50°C operating temperature
DR-75-24	75W/3.2A DIN-rail 24 VDC power supply with universal 85 to 264 VAC or 120 to 370 VDC input, -10 to 60°C operating temperature
MDR-40-24	DIN-rail 24 VDC power supply with 40W/1.7A, 85 to 264 VAC, or 120 to 370 VDC input, -20 to 70°C operating temperature
MDR-60-24	DIN-rail 24 VDC power supply with 60W/2.5A, 85 to 264 VAC, or 120 to 370 VDC input, -20 to 70°C operating temperature

Wall-Mounting Kits

WK-30	Wall-mounting kit, 2 plates, 4 screws, 40 x 30 x 1 mm
WK-46	Wall-mounting kit, 2 plates, 8 screws, 46.5 x 66.8 x 1 mm

Rack-Mounting Kits

RK-4U	19-inch rack-mounting kit
-------	---------------------------

© Moxa Inc. All rights reserved. Updated May 22, 2020.

This document and any portion thereof may not be reproduced or used in any manner whatsoever without the express written permission of Moxa Inc. Product specifications subject to change without notice. Visit our website for the most up-to-date product information.