



□172x150x51 mm
(□6.77x6x2 in)



Frame: Die cast aluminum

Impeller: Plastic

Ambient Temperature Range: -20°C ~ +70°C

Operating Voltage Range: Rated Voltage ±10%

Bearing: Ball

Motor Structure: AC Induction Capacitor


Motor protection: Thermal Protected **IP54**

Termination: Terminals or Lead wire


Package: 890g / PC X-1050g/PC, 12PCS / CTN

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Dimension (units:mm)

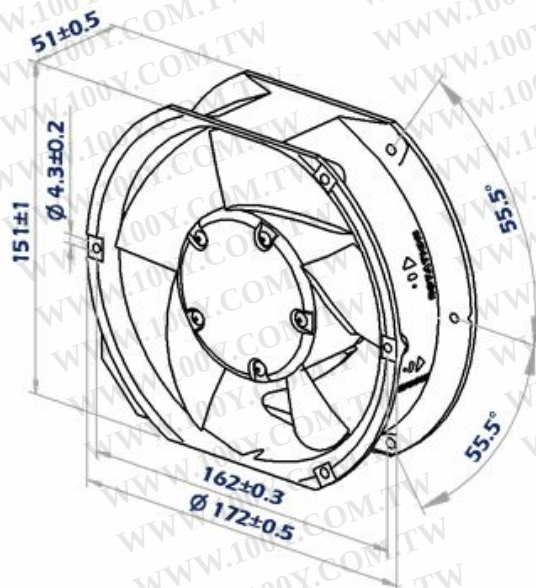

Characteristic Curves

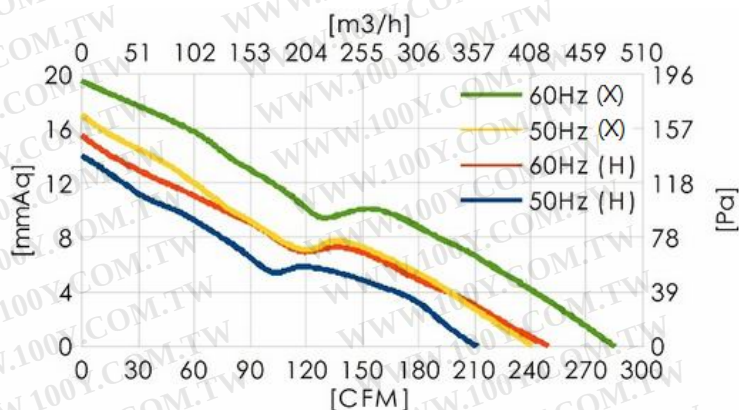

SPECIFICATION

Model	Voltage (V)	Freq. (Hz)	Current (A)	Power (W)	Speed (RPM)	Air Flow (CFM)	Pressure (mmAq)	Noise (dB)
CY11751XBT(L)	115	50/60	0.28/0.24	27	2800/3300	230/270	16.5/20	55/61
CY21751XBT(L)	230	50/60	0.11/0.12	24/27	2800/3300	230/270	16.5/20	55/61
CY11751HBT(L)	115	50/60	0.25/0.23	27	2650/3050	210/250	14/15.5	53/59
CY21751HBT(L)	230	50/60	0.11	26	2650/3050	210/250	14/15.5	53/59