

30×30×10MM SERIES

Bearing Type: Two ball bearing

EBR

Rated Voltage 5v U 12v L.M.H.U


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance

Operating Temp : ~10~70℃


Weight : 10g

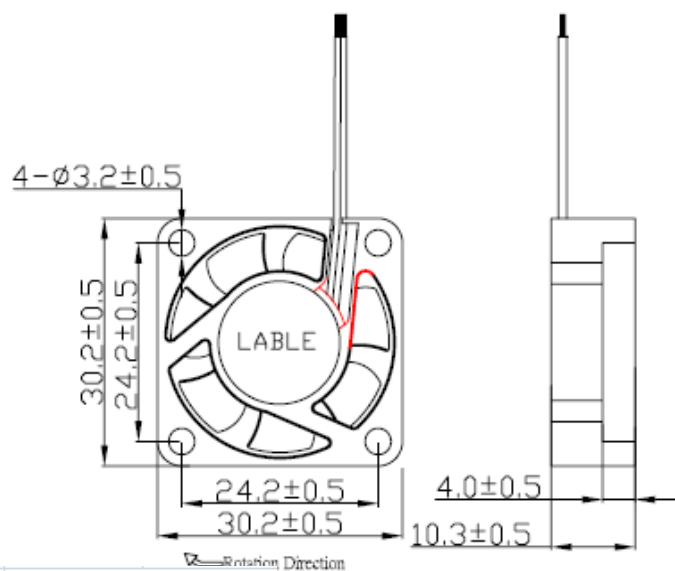

3010套用3510的安規

AIR PRESURE-AIR FLOW (PERFORMANCE CURVES)

AIR PRESSURE(mmH₂O)

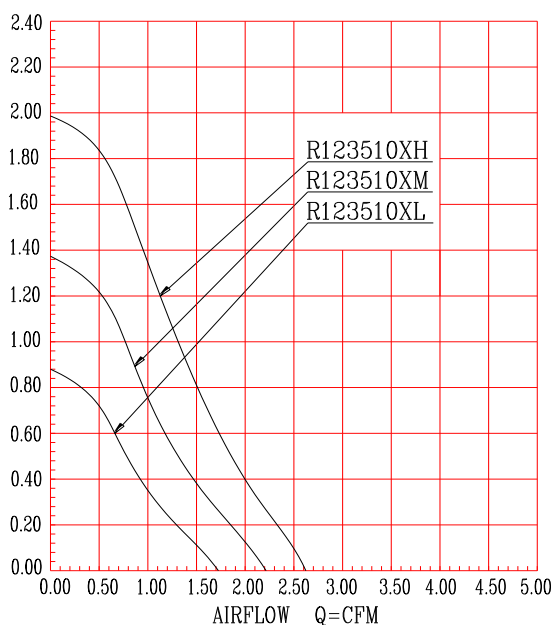

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
R123510BL	12	7~13.2	0.16	1.92	6000	2.00	0.05	1.91	26
R123510BM	12	7~13.2	0.18	2.16	7500	2.50	0.07	2.99	31
R123510BH	12	7~13.2	0.25	3.00	9000	3.00	0.08	4.3	35
R123510SL	12	7~13.2	0.16	1.92	6000	2.00	0.05	1.91	26
R123510SM	12	7~13.2	0.18	2.16	7500	2.50	0.07	2.99	31
R123510SH	12	7~13.2	0.25	3.00	9000	3.00	0.08	4.3	35

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

35×35×10MM SERIES

Bearing Type: Two ball bearing

EBR

Rated Voltage: 5v U 12v L.M.H.U


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance


Operating Temp : ~10~70℃

Weight : 10g

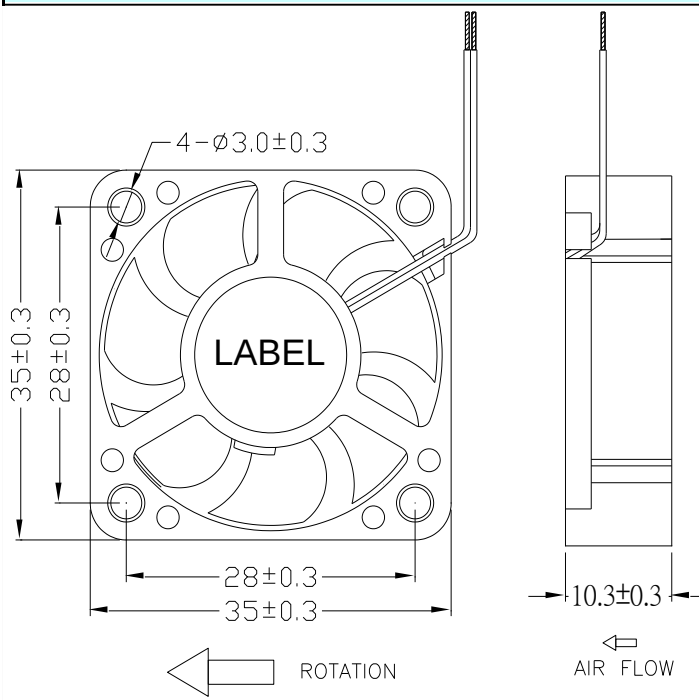

AIR PRESURE-AIR FLOW (PERFORMANCE CURVES)

AIR PRESSURE(mmH₂O)

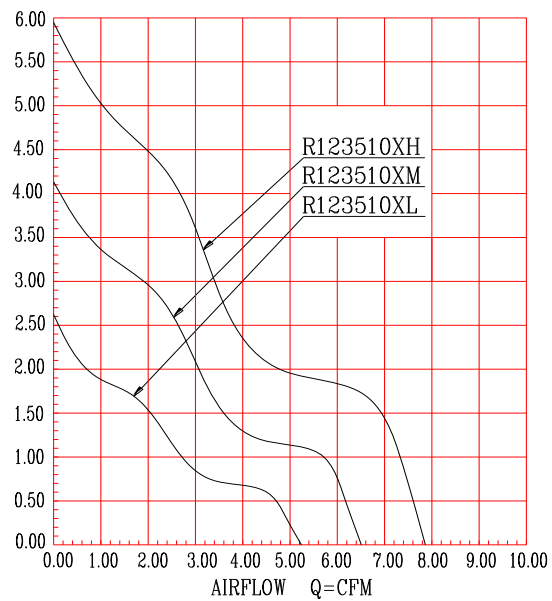

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
R123510BL	12	7~13.2	0.16	1.92	6000	5.21	0.15	2.65	22.5
R123510BM	12	7~13.2	0.18	2.16	7500	6.52	0.18	4.15	25.3
R123510BH	12	7~13.2	0.25	3.00	9000	7.82	0.22	5.97	31
R123510SL	12	7~13.2	0.16	1.92	6000	5.21	0.15	2.65	22.5
R123510SM	12	7~13.2	0.18	2.16	7500	6.52	0.18	4.15	25.3
R123510SH	12	7~13.2	0.25	3.00	9000	7.82	0.22	5.97	31

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

40×40×7MM SERIES

Bearing Type:

EBR

Rated Voltage: 5V/12V


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)


Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 15g

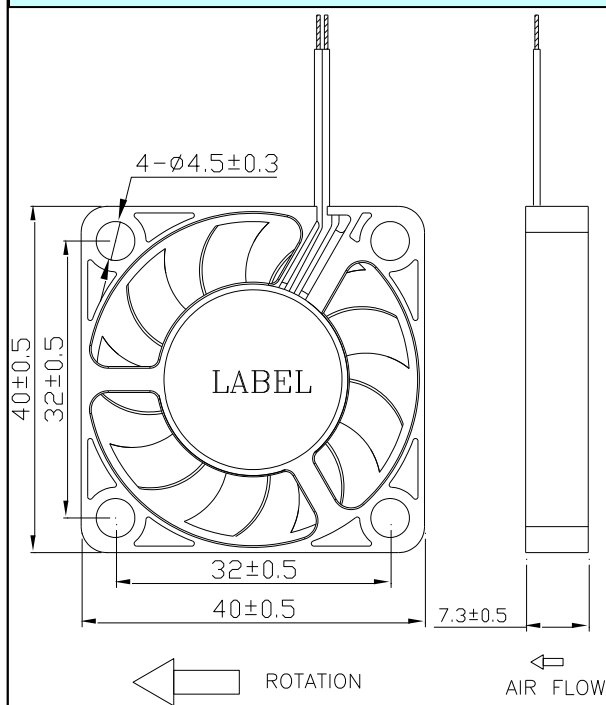

AIR PRESSURE-AIR FLOW (PERFORMANCE CURVES)
AIR PRESSURE (mmH₂O)

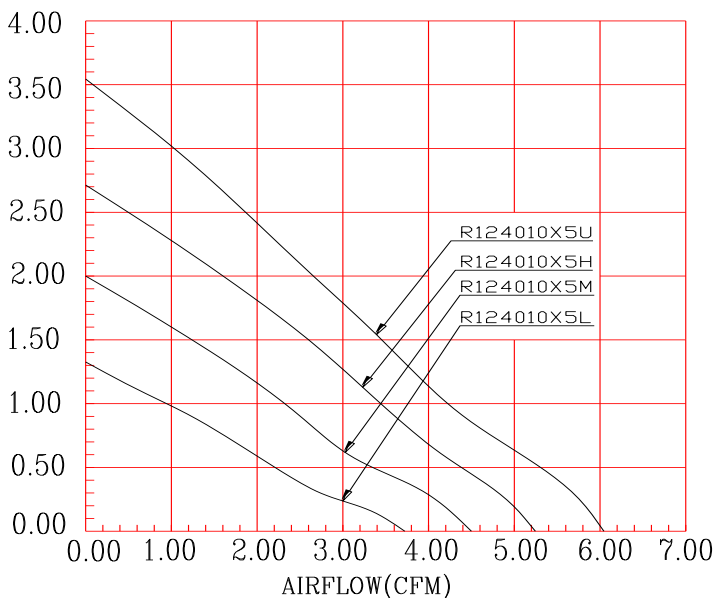

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
R124010SL	12	7~13.2	0.10	1.20	5000	3.77	0.11	1.39	22.6
R124010SM	12	7~13.2	0.12	1.44	6000	4.53	0.13	2.00	25.8
R124010SH	12	7~13.2	0.14	1.68	7000	5.29	0.15	2.72	28.9
R124010SU	12	7~13.2	0.18	2.16	8000	6.05	0.17	3.55	32.3

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

40×40×10MM SERIES

Bearing Type: Two ball bearing

EBR

Rated Voltage: 5V/12V


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance


Operating Temp : ~10~70℃

Weight : 15g

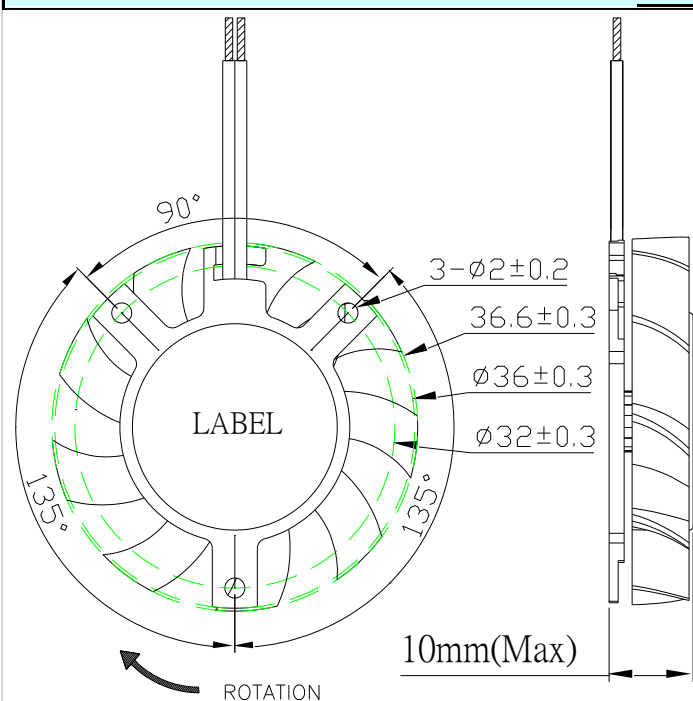

AIR PRESURE-AIR FLOW(PERFORMANCE CURVES)

AIR PRESSURE (mmH₂O)

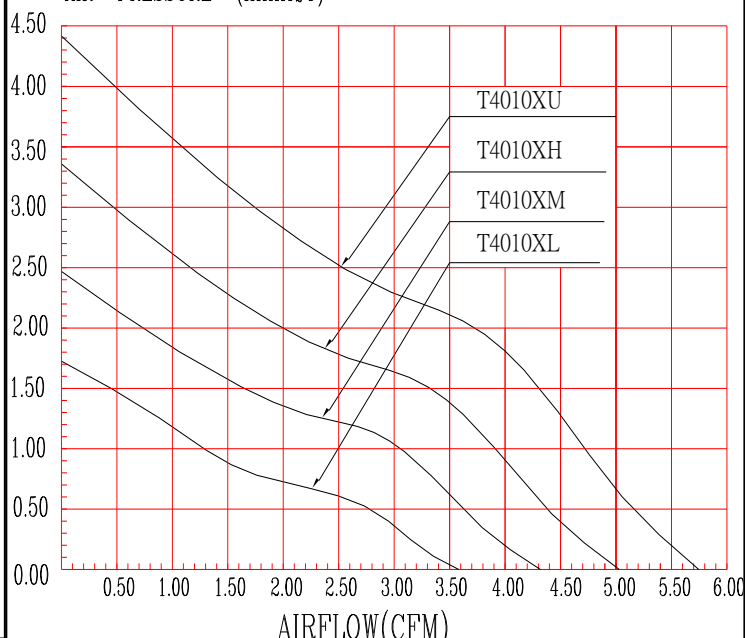

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
T124010BL	12	7~13.2	0.10	1.20	5000	3.59	0.10	1.73	24
T124010BM	12	7~13.2	0.12	1.44	6000	4.31	0.12	2.49	26
T124010BH	12	7~13.2	0.14	1.68	7000	5.03	0.14	3.39	28.1
T124010BU	12	7~13.2	0.18	2.16	8000	5.75	0.16	4.42	30.2
T124010SL	12	7~13.2	0.10	1.20	5000	3.59	0.10	1.73	24
T124010SM	12	7~13.2	0.12	1.44	6000	4.31	0.12	2.49	26
T124010SH	12	7~13.2	0.14	1.68	7000	5.03	0.14	3.39	28.1
T124010SU	12	7~13.2	0.18	2.16	8000	5.75	0.16	4.42	30.2

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

40×40×8MM SERIES

Bearing Type: Two ball bearing

EBR

Rated Voltage: 5V/12V



Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance

Operating Temp : ~10~70℃

Weight : 15g

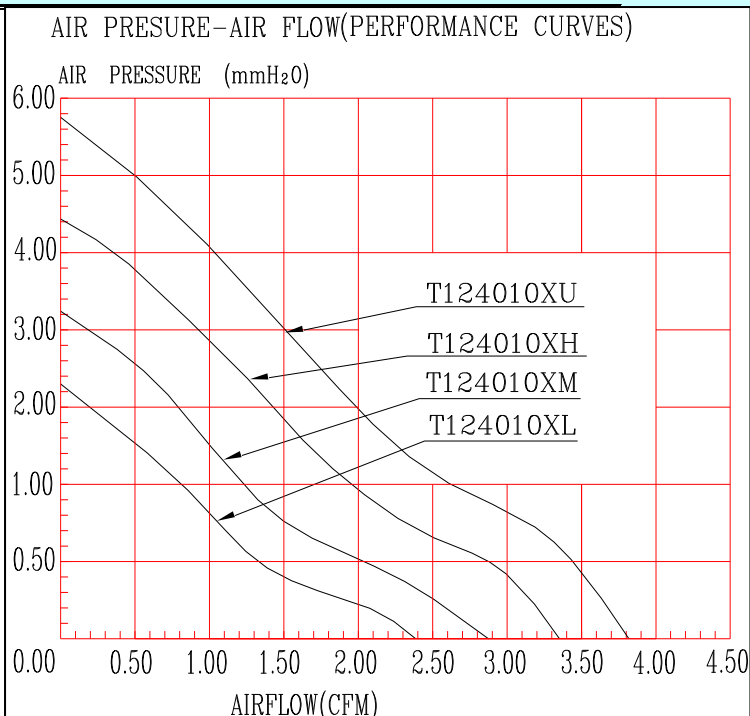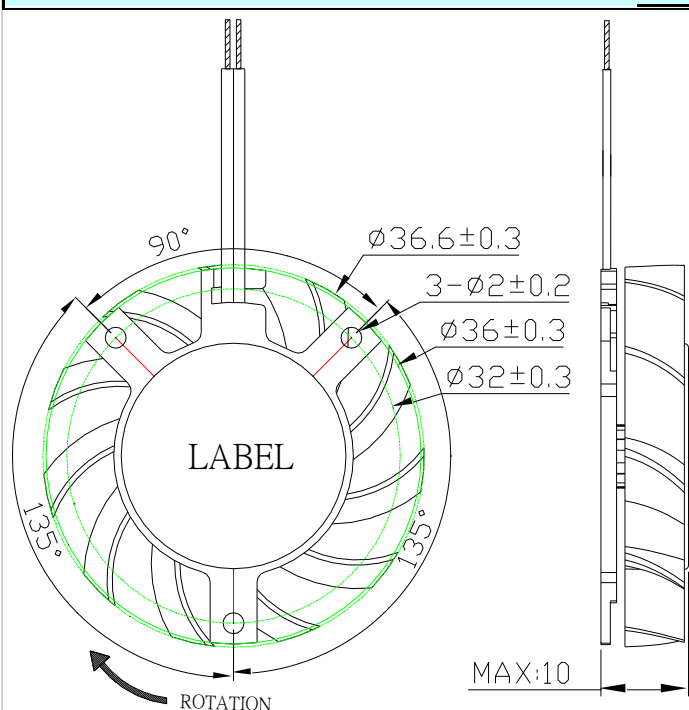

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
T124010BL	12	7~13.2	0.10	1.20	5000	2.39	0.07	2.26	27.9
T124010BM	12	7~13.2	0.12	1.44	6000	2.87	0.08	3.23	32.5
T124010BH	12	7~13.2	0.14	1.68	7000	3.34	0.09	4.42	35.2
T124010BU	12	7~13.2	0.18	2.16	8000	3.82	0.11	5.77	38.4
T124010SL	12	7~13.2	0.10	1.20	5000	2.39	0.07	2.26	27.9
T124010SM	12	7~13.2	0.12	1.44	6000	2.87	0.08	3.23	32.5
T124010SH	12	7~13.2	0.14	1.68	7000	3.34	0.09	4.42	35.2
T124010SU	12	7~13.2	0.18	2.16	8000	3.82	0.11	5.77	38.4

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

40×40×10MM SERIES

Bearing Type: Two ball bearing
EBR

Rated Voltage: 5V/12V


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance

Operating Temp : ~10~70℃


Weight : 12g

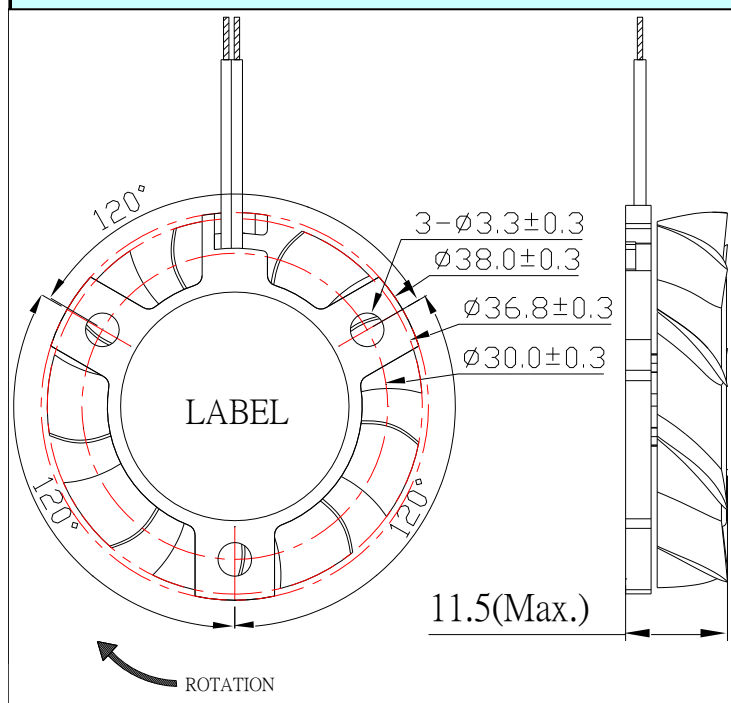

此款孔徑有2.3MM 跟3.3MM

AIR PRESSURE-AIR FLOW (PERFORMANCE CURVES)

AIR PRESSURE (mmH₂O)

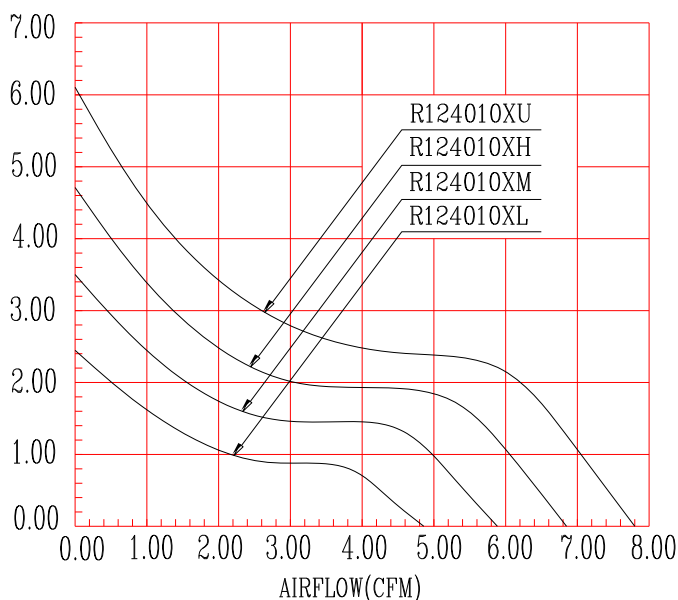

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
R124010BL	12	7~13.2	0.10	1.20	5000	4.87	0.14	2.41	23.2
R124010BM	12	7~13.2	0.12	1.44	6000	5.85	0.17	3.46	26.9
R124010BH	12	7~13.2	0.14	1.68	7000	6.82	0.19	4.72	30.4
R124010BU	12	7~13.2	0.18	2.16	8000	7.80	0.22	6.16	34.7
R124010SL	12	7~13.2	0.10	1.20	5000	4.87	0.14	2.41	23.2
R124010SM	12	7~13.2	0.12	1.44	6000	5.85	0.17	3.46	26.9
R124010SH	12	7~13.2	0.14	1.68	7000	6.82	0.19	4.72	30.4
R124010SU	12	7~13.2	0.18	2.16	8000	7.80	0.22	6.16	34.7

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

40×40×10MM SERIES

Bearing Type: Two ball bearing
EBR

Rated Voltage: 5V/12V


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)


Protection : Auto-Restart /Impedance

Operating Temp : ~10~70℃

Weight : 15g

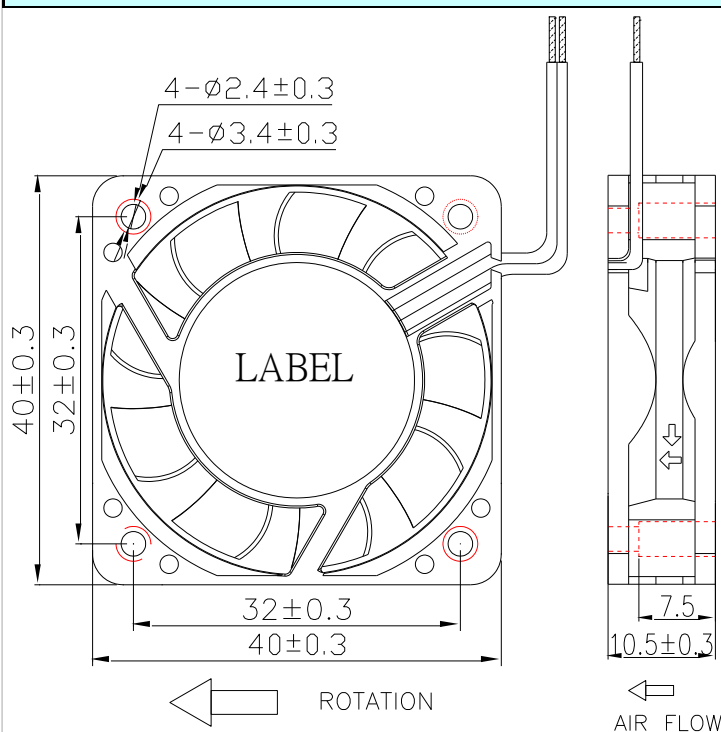

AIR PRESSURE-AIR FLOW (PERFORMANCE CURVES)

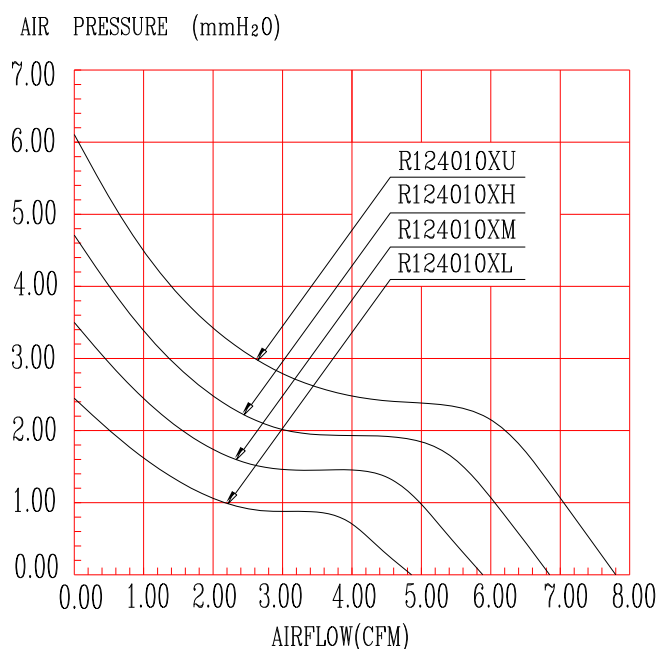

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
R124010BL	12	7~13.2	0.10	1.20	5000	4.87	0.14	2.41	23.2
R124010BM	12	7~13.2	0.12	1.44	6000	5.85	0.17	3.46	26.9
R124010BH	12	7~13.2	0.14	1.68	7000	6.82	0.19	4.72	30.4
R124010BU	12	7~13.2	0.18	2.16	8000	7.80	0.22	6.16	34.7
R124010SL	12	7~13.2	0.10	1.20	5000	4.87	0.14	2.41	23.2
R124010SM	12	7~13.2	0.12	1.44	6000	5.85	0.17	3.46	26.9
R124010SH	12	7~13.2	0.14	1.68	7000	6.82	0.19	4.72	30.4
R124010SU	12	7~13.2	0.18	2.16	8000	7.80	0.22	6.16	34.7

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

40×40×10MM SERIES

Bearing Type: Two ball bearing
EBR

Rated Voltage: 5V/12V


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance


Operating Temp : ~10~70°C

Weight : 15g

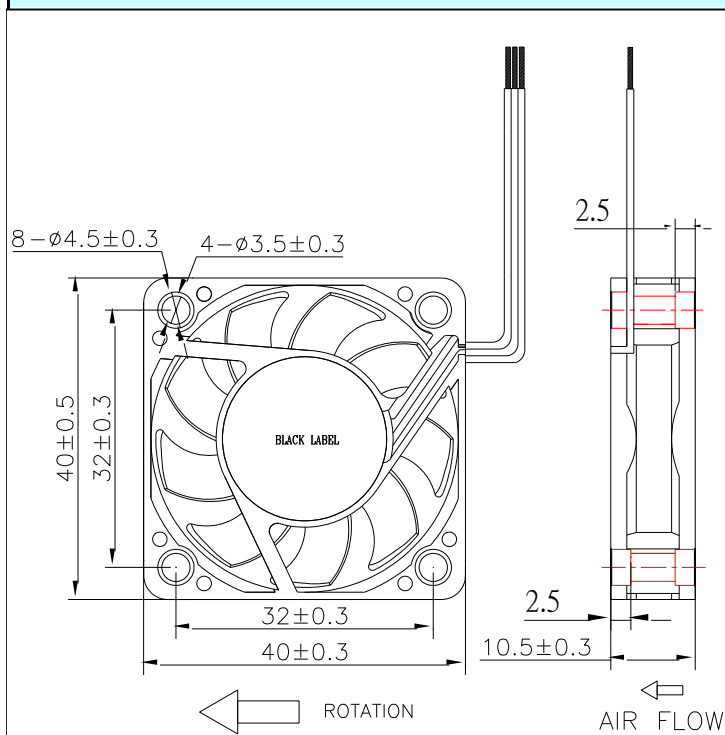

AIR PRESSURE-AIR FLOW (PERFORMANCE CURVES)

AIR PRESSURE (mmH₂O)

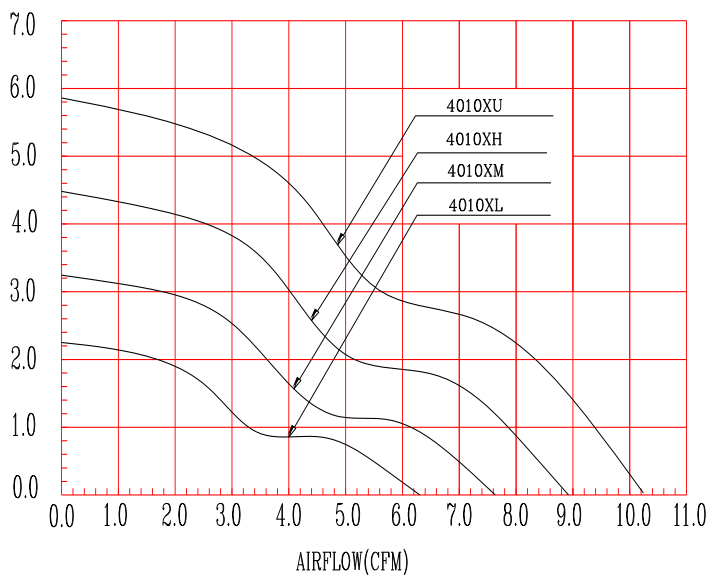

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
R124010BL	12	7~13.2	0.10	1.20	5000	6.38	0.18	2.27	23.5
R124010BM	12	7~13.2	0.12	1.44	6000	7.66	0.22	3.27	28.3
R124010BH	12	7~13.2	0.14	1.68	7000	8.94	0.25	4.45	34.2
R124010BU	12	7~13.2	0.18	2.16	8000	10.22	0.29	5.81	36.3
R124010SL	12	7~13.2	0.10	1.20	5000	6.38	0.18	2.27	23.5
R124010SM	12	7~13.2	0.12	1.44	6000	7.66	0.22	3.27	28.3
R124010SH	12	7~13.2	0.14	1.68	7000	8.94	0.25	4.45	34.2
R124010SU	12	7~13.2	0.18	2.16	8000	10.22	0.29	5.81	36.3
					9000	11.50	0.33	7.35	40.2

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

40×40×10MM SERIES

Bearing Type: Two ball bearing
EBR


Rated Voltage: 5V/12V

Material : Housing Plastic (UL : 94V-0)
Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance


Operating Temp : ~10~70℃

Weight : 15g

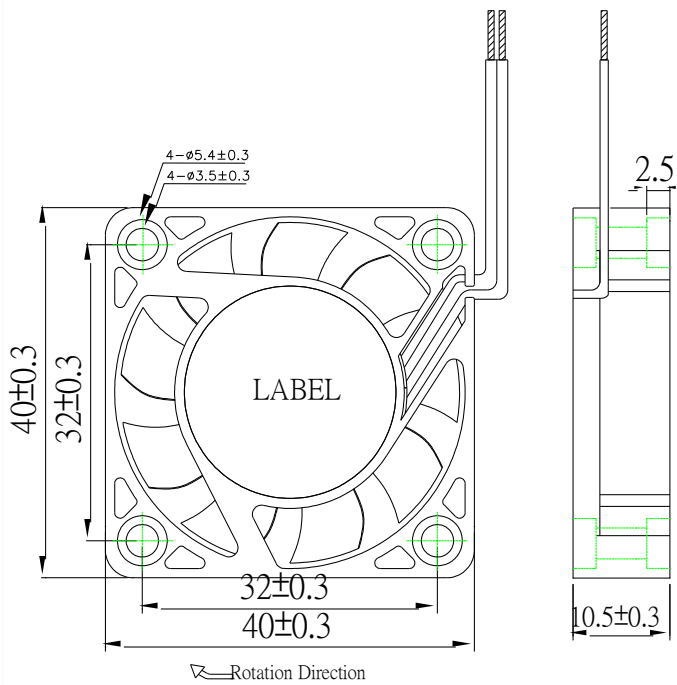

AIR PRESSURE-AIR FLOW (PERFORMANCE CURVES)

AIR PRESSURE (mmH₂O)

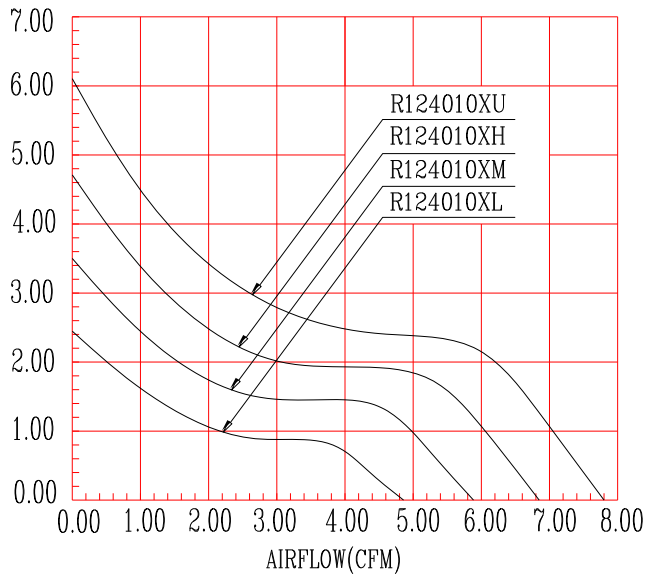

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
R124010BL	12	7~13.2	0.10	1.20	5000	4.87	0.14	2.41	23.2
R124010BM	12	7~13.2	0.12	1.44	6000	5.85	0.17	3.46	26.9
R124010BH	12	7~13.2	0.14	1.68	7000	6.82	0.19	4.72	30.4
R124010BU	12	7~13.2	0.18	2.16	8000	7.80	0.22	6.16	34.7
R124010SL	12	7~13.2	0.10	1.20	5000	4.87	0.14	2.41	23.2
R124010SM	12	7~13.2	0.12	1.44	6000	5.85	0.17	3.46	26.9
R124010SH	12	7~13.2	0.14	1.68	7000	6.82	0.19	4.72	30.4
R124010SU	12	7~13.2	0.18	2.16	8000	7.80	0.22	6.16	34.7

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

40×40×10MM SERIES

Bearing Type: Two ball bearing
EBR

Rated Voltage: 5V/12V


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)


Protection : Auto-Restart /Impedance

Operating Temp : ~10~70℃

Weight : 15g

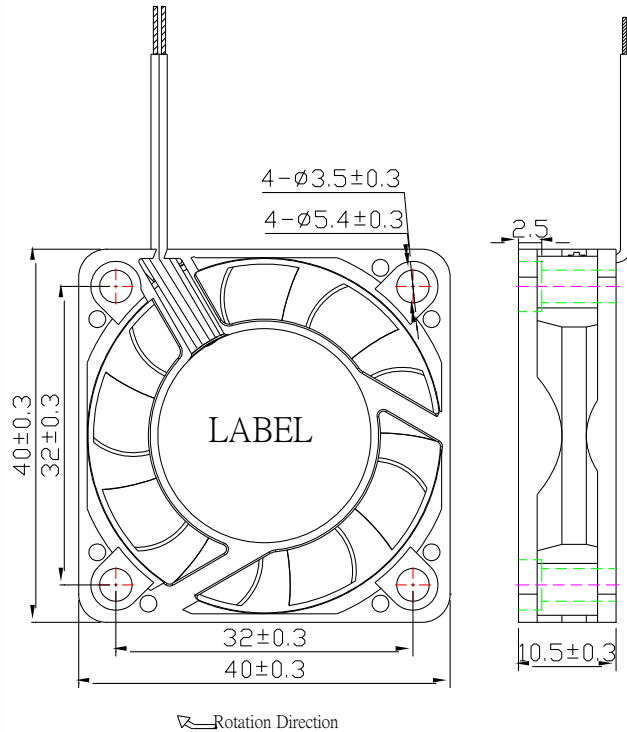

AIR PRESSURE-AIR FLOW (PERFORMANCE CURVES)

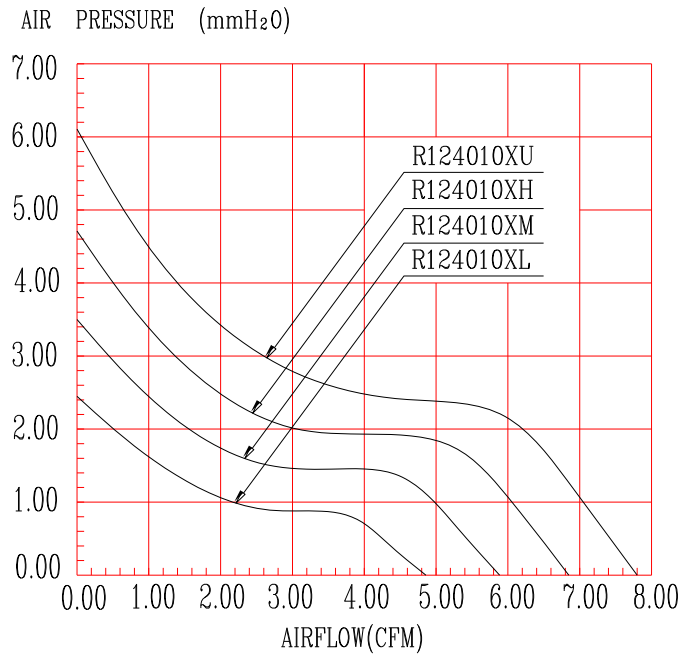

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
R124010BL	12	7~13.2	0.10	1.20	5000	4.87	0.14	2.41	23.2
R124010BM	12	7~13.2	0.12	1.44	6000	5.85	0.17	3.46	26.9
R124010BH	12	7~13.2	0.14	1.68	7000	6.82	0.19	4.72	30.4
R124010BU	12	7~13.2	0.18	2.16	8000	7.80	0.22	6.16	34.7
R124010SL	12	7~13.2	0.10	1.20	5000	4.87	0.14	2.41	23.2
R124010SM	12	7~13.2	0.12	1.44	6000	5.85	0.17	3.46	26.9
R124010SH	12	7~13.2	0.14	1.68	7000	6.82	0.19	4.72	30.4
R124010SU	12	7~13.2	0.18	2.16	8000	7.80	0.22	6.16	34.7

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

40×40×20MM SERIES

Bearing Type: Two ball bearing
EBR

Rated Voltage: 12V/24V


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)


Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 30g

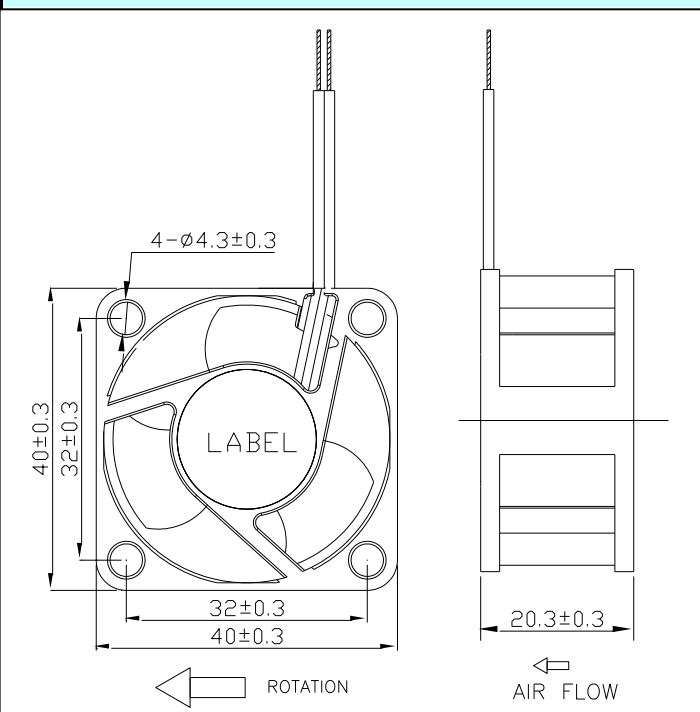

AIR PRESURE-AIR FLOW (PERFORMANCE CURVES)

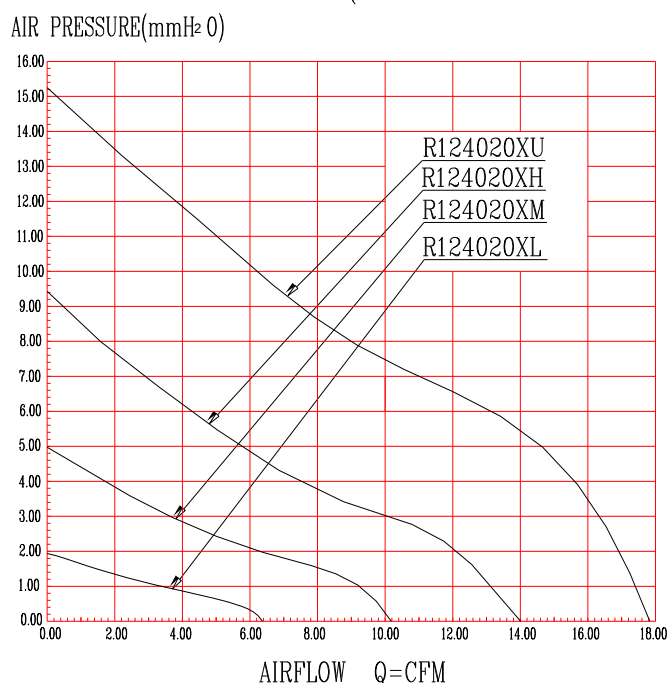

此款模具我司目前有4.3mm 3.6mm的螺絲孔徑。

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
R124020BL	12	7~13.2	0.13	1.56	5000	6.37	0.18	1.94	26
R124020BM	12	7~13.2	0.16	1.92	8000	10.19	0.29	4.98	38
R124020BH	12	7~13.2	0.23	2.76	11000	14.01	0.40	9.41	46
R124020BU	12	7~13.2	0.45	5.4	14000	17.83	0.51	15.24	56
R104020SL	12	7~13.2	0.13	1.56	5000	6.37	0.18	1.94	26
R124020SM	12	7~13.2	0.16	1.92	8000	10.19	0.29	4.98	38
R124020SH	12	7~13.2	0.23	2.76	11000	14.01	0.40	9.41	46
R124020SU	12	7~13.2	0.45	5.4	14000	17.83	0.51	15.24	56

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

40×40×20MM SERIES

Bearing Type: Two ball bearing
EBR

Rated Voltage: 12V/24V


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)


Protection : Auto-Restart /Impedance

Operating Temp : ~10~70℃

Weight : 30g

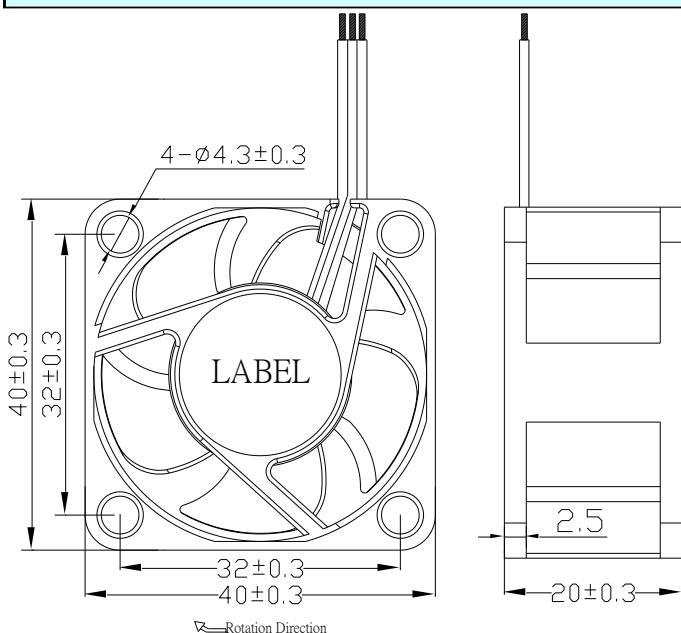

AIR PRESURE-AIR FLOW (PERFORMANCE CURVES)

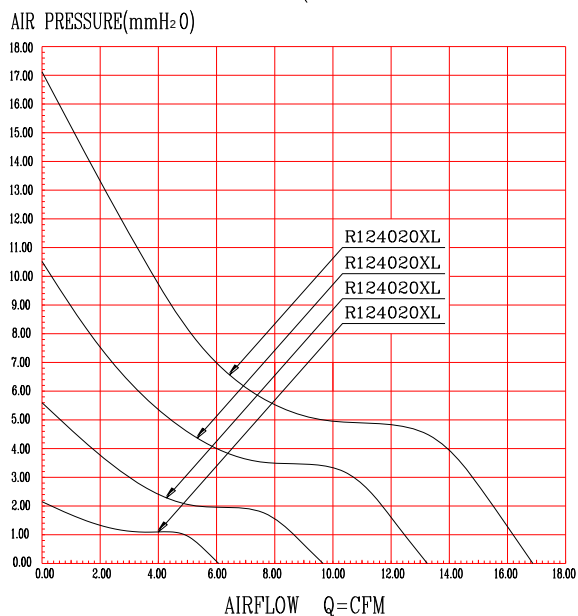

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
R124020BL	12	7~13.2	0.13	1.56	5000	6.01	0.17	2.19	24.5
R124020BM	12	7~13.2	0.16	1.92	8000	9.61	0.27	5.60	34.8
R124020BH	12	7~13.2	0.23	2.76	11000	13.21	0.37	10.59	45.4
R124020BU	12	7~13.2	0.45	5.4	14000	16.82	0.48	17.16	49.4
R104020SL	12	7~13.2	0.13	1.56	5000	6.01	0.17	2.19	24.5
R124020SM	12	7~13.2	0.16	1.92	8000	9.61	0.27	5.60	34.8
R124020SH	12	7~13.2	0.23	2.76	11000	13.21	0.37	10.59	45.4
R124020SU	12	7~13.2	0.45	5.4	14000	16.82	0.48	17.16	49.4

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

40×40×28MM SERIES

Bearing Type: Two ball bearing
EBR

Rated Voltage: 12V/24V


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)


Protection : Auto-Restart /Impedance

Operating Temp : ~10~70℃

Weight : 31g

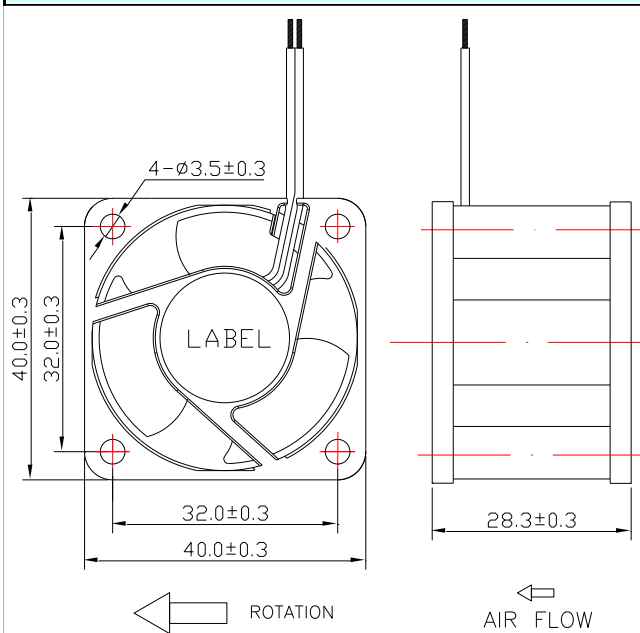

AIR PRESSURE-AIR FLOW (PERFORMANCE CURVES)

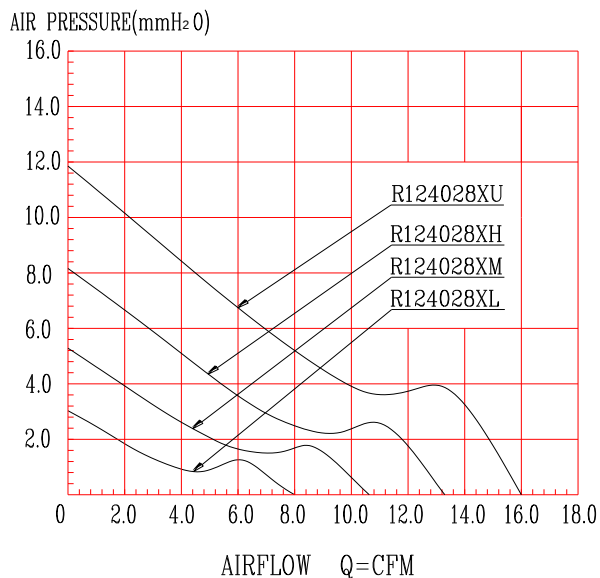

此款模具我司目前有4.3mm 3.5mm的螺絲孔徑.

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
R124028BL	12	7~13.2	0.15	1.8	6000	8.00	0.23	2.95	26.9
R124028BM	12	7~13.2	0.18	2.16	8000	10.66	0.30	5.24	33.9
R124028BH	12	7~13.2	0.28	3.36	10000	13.33	0.38	8.18	39.9
R124028BU	12	7~13.2	0.40	4.8	12000	16.00	0.45	11.78	43.5
R124028SL	12	7~13.2	0.15	1.8	6000	8.00	0.23	2.95	26.9
R124028SM	12	7~13.2	0.18	2.16	8000	10.66	0.30	5.24	33.9
R124028SH	12	7~13.2	0.28	3.36	10000	13.33	0.38	8.18	39.9
R124028SU	12	7~13.2	0.40	4.8	12000	16.00	0.45	11.78	43.5

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

40×40×28MM SERIES

Bearing Type: Two ball bearing

Rated Voltage: 12V/24V


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance


Operating Temp : ~10~70℃

Weight : 32g

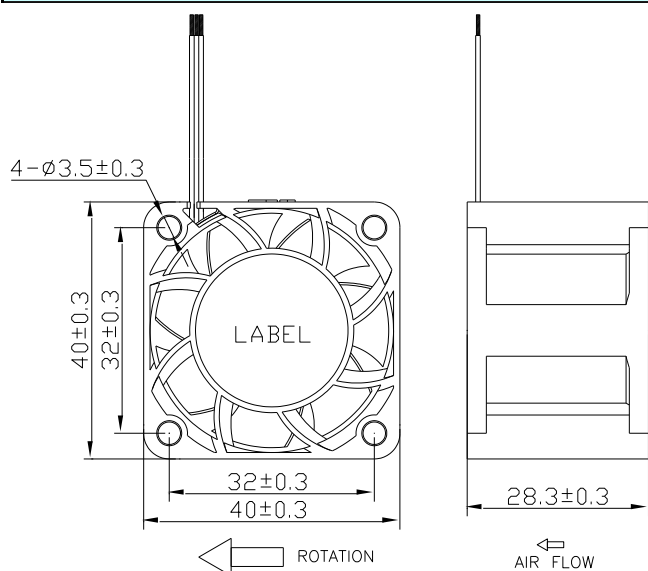

AIR PRESURE-AIR FLOW (PERFORMANCE CURVES)

AIR PRESSURE(mmH₂O)

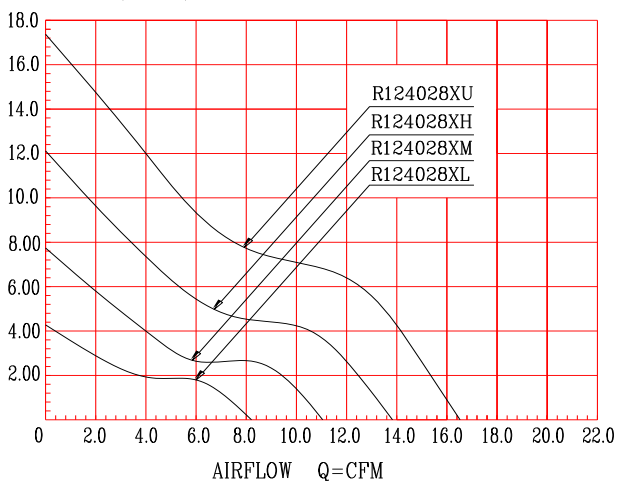

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
R124028BL	12	7~13.2	0.15	1.80	6000	8.28	0.23	4.37	32
R124028BM	12	7~13.2	0.18	2.16	8000	11.04	0.31	7.76	38.4
R124028BH	12	7~13.2	0.28	3.36	10000	13.80	0.39	12.13	43.4
R124028BU	12	7~13.2	0.40	4.80	12000	16.56	0.47	17.46	48.3

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

EVERFLOW

40×40×56MM SERIES

Bearing Type: Two ball bearing

Rated Voltage: 12V/24V


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)


Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 77g

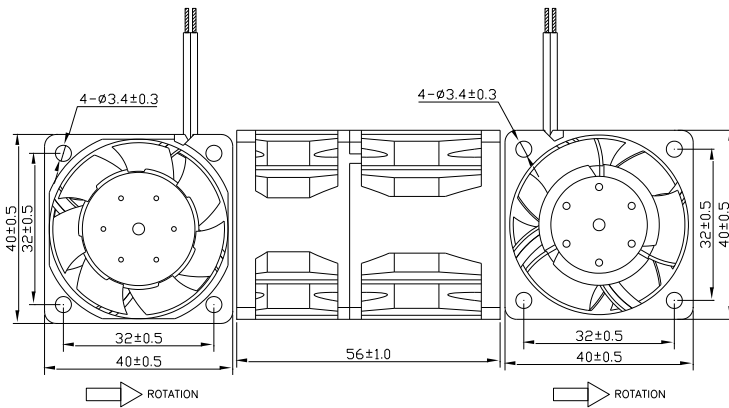

AIR FLOW-AIR PRESSURE(PERFORMANCE CURVES)
AIR PRESSURE(mmH₂O)

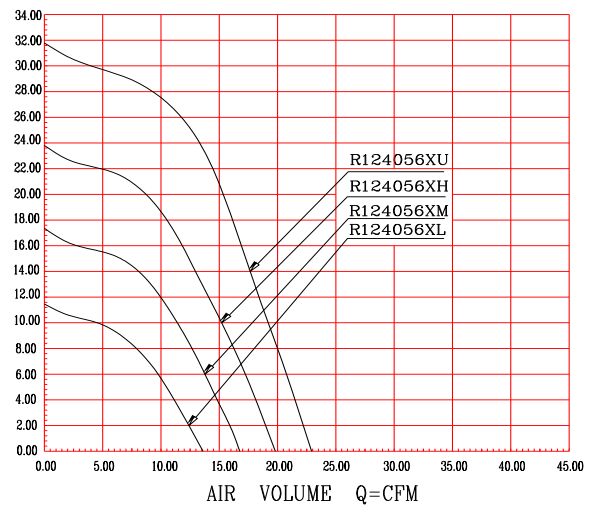

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
R124056BL	12	7~13.2	0.60	7.2	9000	13.79	0.39	11.48	48.8
R124056BM	12	7~13.2	0.90	10.8	11000	16.86	0.48	17.15	52.3
R124056BH	12	7~13.2	1.20	14.4	13000	19.92	0.56	23.96	56.5
R124056BU	12	7~13.2	1.50	18	15000	22.99	0.65	31.90	57.7

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

45×45×10MM SERIES

Bearing Type: Two ball bearing

EBR

Rated Voltage: 5V/12V



Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 20g

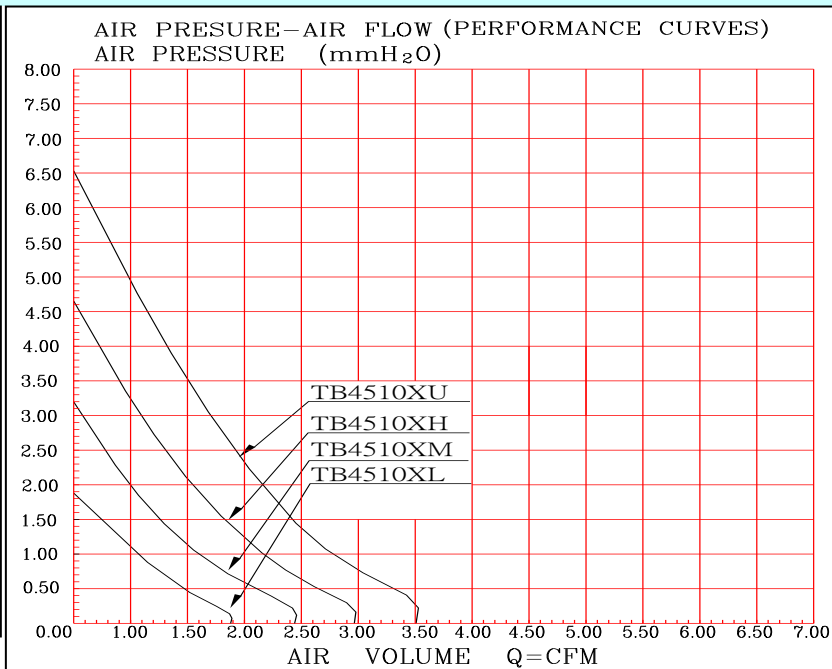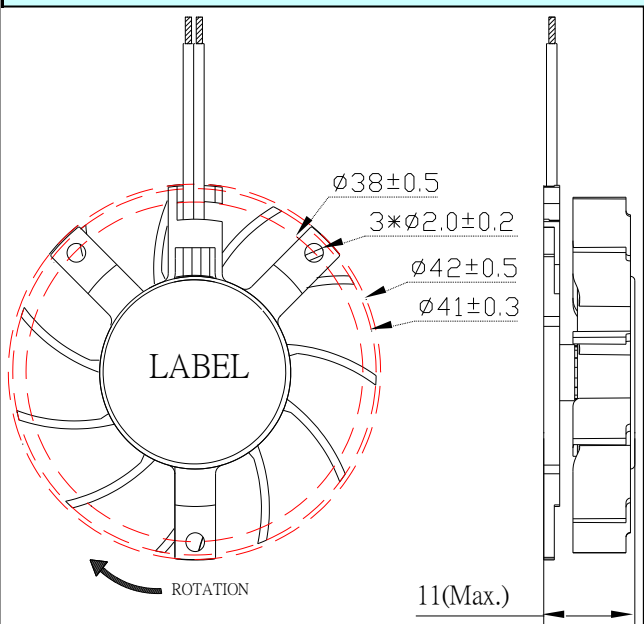

此基架有:有卡扣及無卡扣(直通式)

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
T125010BL	12	7~13.2	0.13	1.56	3500	1.89	0.05	1.89	26.4
T125010BM	12	7~13.2	0.15	1.80	4500	2.43	0.07	3.12	32.1
T125010BH	12	7~13.2	0.25	3.00	5500	2.97	0.08	4.66	38
T125010BU	12	7~13.2	0.32	3.84	6500	3.51	0.10	6.51	38.9
T125010SL	12	7~13.2	0.13	1.56	3500	1.89	0.05	1.89	26.4
T125010SM	12	7~13.2	0.15	1.80	4500	2.43	0.07	3.12	32.1
T125010SH	12	7~13.2	0.25	3.00	5500	2.97	0.08	4.66	38
T125010SU	12	7~13.2	0.32	3.84	6500	3.51	0.10	6.51	38.9

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

50×50×10MM SERIES

Bearing Type: Two ball bearing

EBR

Rated Voltage: 5V/12V



Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 10g

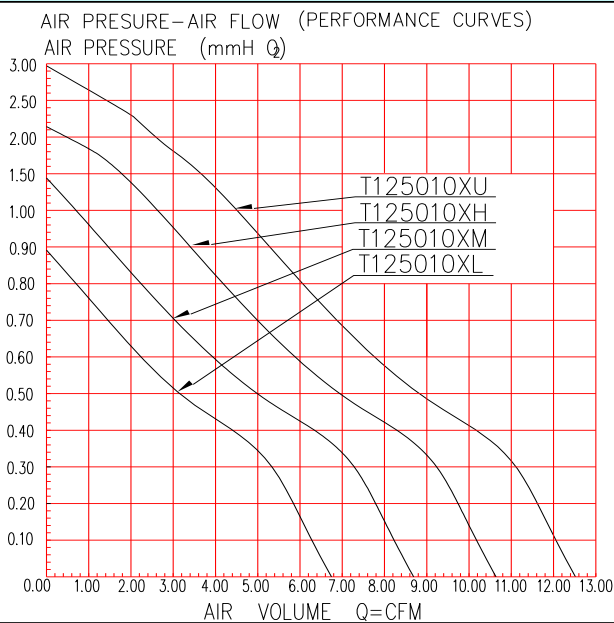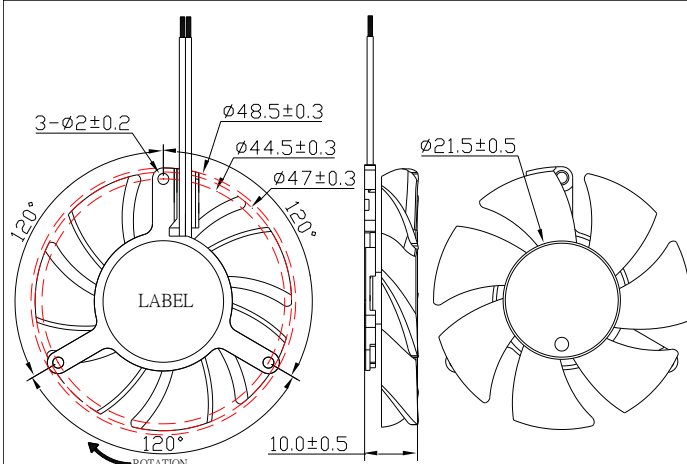

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
T125010BL	12	7~13.2	0.13	1.56	3500	6.74	0.19	0.87	21
T125010BM	12	7~13.2	0.15	1.80	4500	8.68	0.25	1.44	
T125010BH	12	7~13.2	0.25	3.00	5500	10.61	0.30	2.14	
T125010BU	12	7~13.2	0.32	3.84	6500	12.53	0.36	2.99	
T125010SL	12	7~13.2	0.13	1.56	3500	6.74	0.19	0.87	21
T125010SM	12	7~13.2	0.15	1.80	4500	8.68	0.25	1.44	
T125010SH	12	7~13.2	0.25	3.00	5500	10.61	0.30	2.14	
T125010SU	12	7~13.2	0.32	3.84	6500	12.53	0.36	2.99	

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

50×50×10MM SERIES

Bearing Type: Two ball bearing
EBR

Rated Voltage: 5V/12V



Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 10g

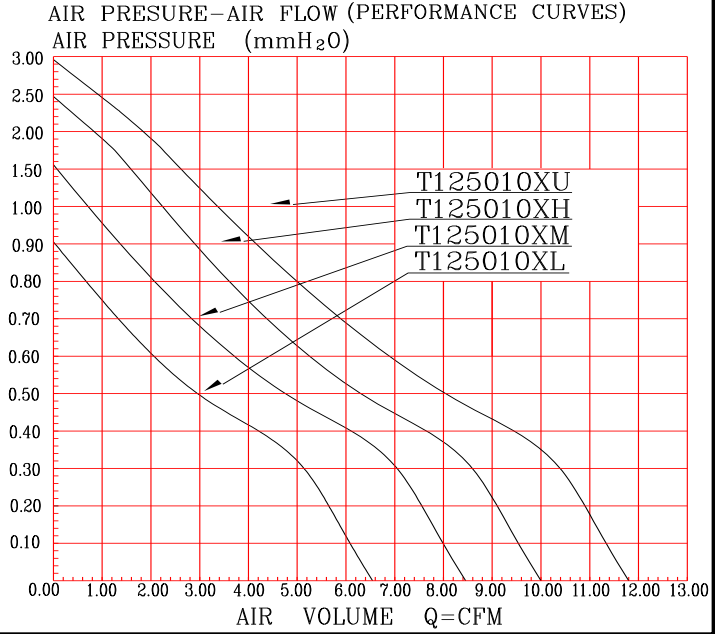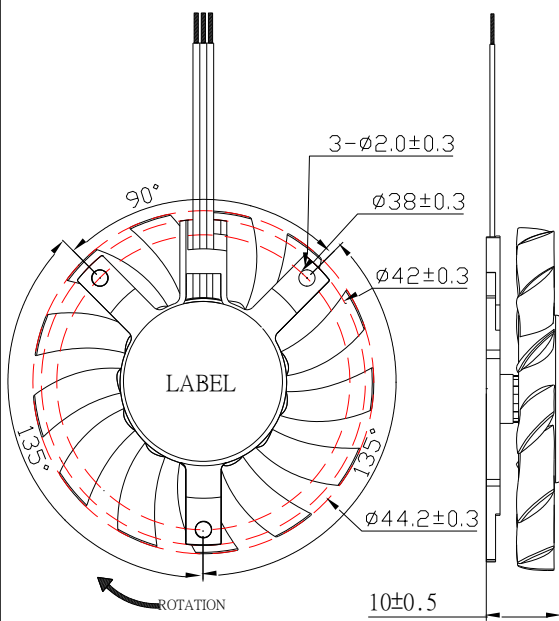

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
T125010BL	12	7~13.2	0.13	1.56	3500	6.57	0.19	0.94	24.5
T125010BM	12	7~13.2	0.15	1.80	4500	8.45	0.24	1.55	29
T125010BH	12	7~13.2	0.25	3.00	5500	10.00	0.28	2.49	34
T125010BU	12	7~13.2	0.32	3.84	6500	11.8	0.33	2.98	40
T125010SL	12	7~13.2	0.13	1.56	3500	6.57	0.19	0.94	24.5
T125010SM	12	7~13.2	0.15	1.80	4500	8.45	0.24	1.55	29
T125010SH	12	7~13.2	0.25	3.00	5500	10.00	0.28	2.49	34
T125010SU	12	7~13.2	0.32	3.84	6500	11.8	0.33	2.98	40

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

50×50×10MM SERIES

Bearing Type: Two ball bearing

EBR

Rated Voltage: 5V/12V


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)


Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 20g

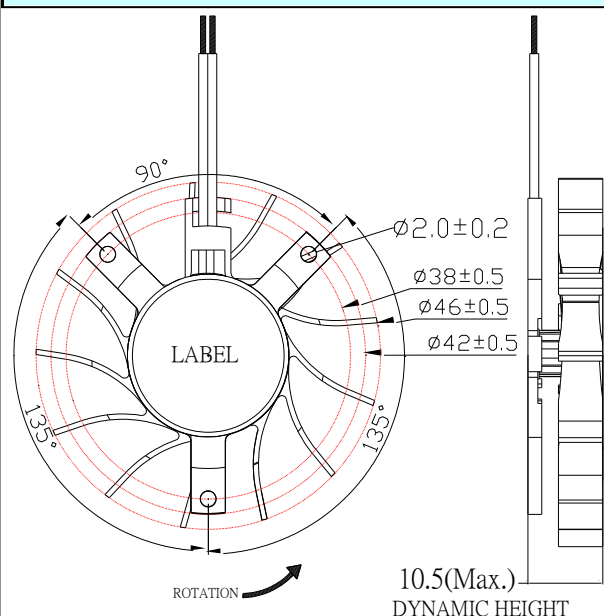

AIR PRESSURE-AIR FLOW (PERFORMANCE CURVES)

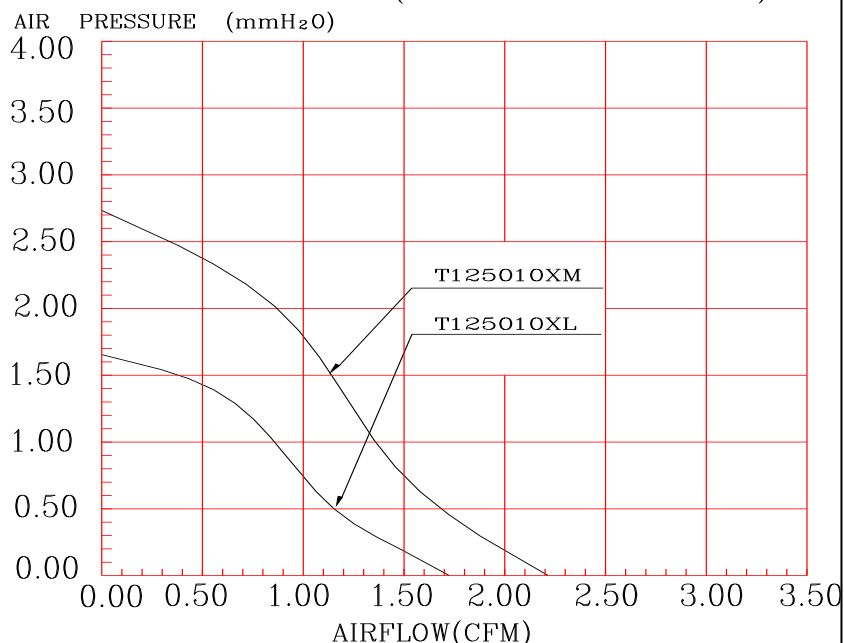

此基架有:有卡扣及無卡扣(直通式)

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
T125010SL	12	7~13.2	0.13	1.56	3500	1.73	0.05	1.66	26
T125010SM	12	7~13.2	0.15	1.80	4500	2.23	0.06	2.74	34
T125010BL	12	7~13.2	0.13	1.56	3500	1.73	0.05	1.66	26
T125010BM	12	7~13.2	0.15	1.80	4500	2.23	0.06	2.74	34

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

50×50×10MM SERIES

Bearing Type: Two ball bearing
EBR

Rated Voltage: 5V/12V


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance


Operating Temp : ~10~70°C

Weight : 20g

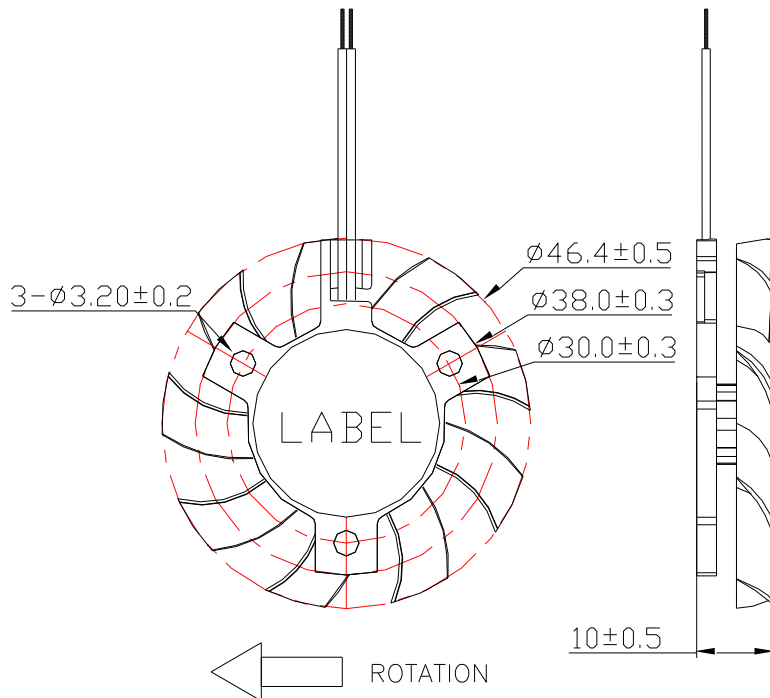

AIR PRESURE-AIR FLOW (PERFORMANCE CURVES)

AIR PRESURE (mmH₂O)

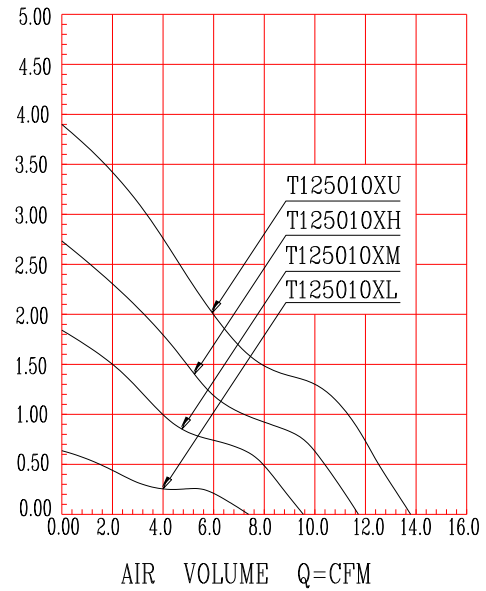

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
R125010BL	12	7~13.2	0.13	1.56	3500	7.45	0.21	0.61	21.1
R125010BM	12	7~13.2	0.15	1.80	4500	9.58	0.27	1.87	25.7
R125010BH	12	7~13.2	0.25	3.00	5500	11.71	0.33	2.79	30.1
R125010BU	12	7~13.2	0.32	3.84	6500	13.84	0.39	3.90	34.7
R125010SL	12	7~13.2	0.13	1.56	3500	7.45	0.21	0.61	21.1
R125010SM	12	7~13.2	0.15	1.80	4500	9.58	0.27	1.87	25.7
R125010SH	12	7~13.2	0.25	3.00	5500	11.71	0.33	2.79	30.1
R125010SU	12	7~13.2	0.32	3.84	6500	13.84	0.39	3.90	34.7

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

50×50×10MM SERIES

Bearing Type: Two ball bearing
EBR

Rated Voltage: 5V/12V


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance


Operating Temp : ~10~70°C

Weight : 20g

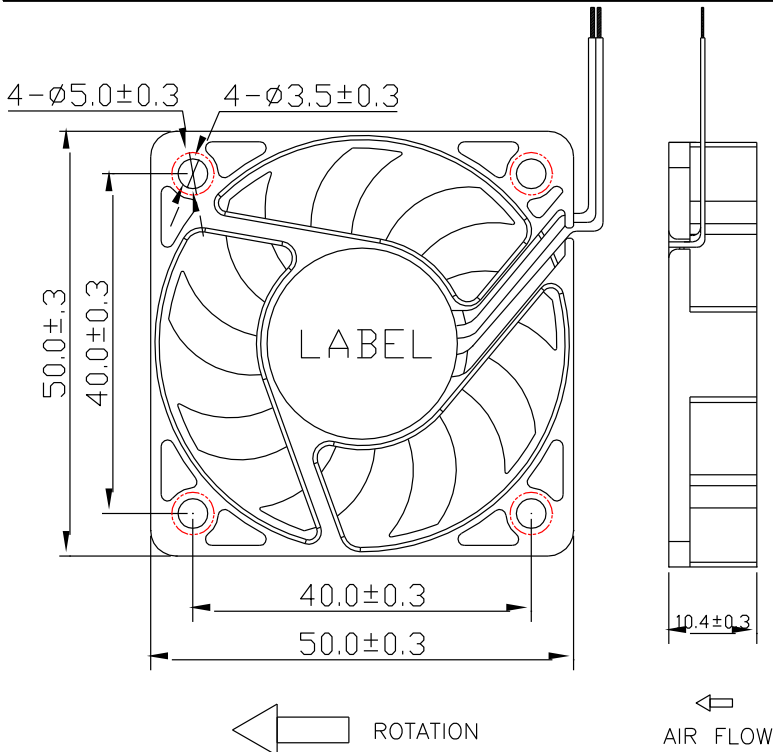

AIR PRESURE-AIR FLOW (PERFORMANCE CURVES)

AIR PRESURE (mmH₂O)

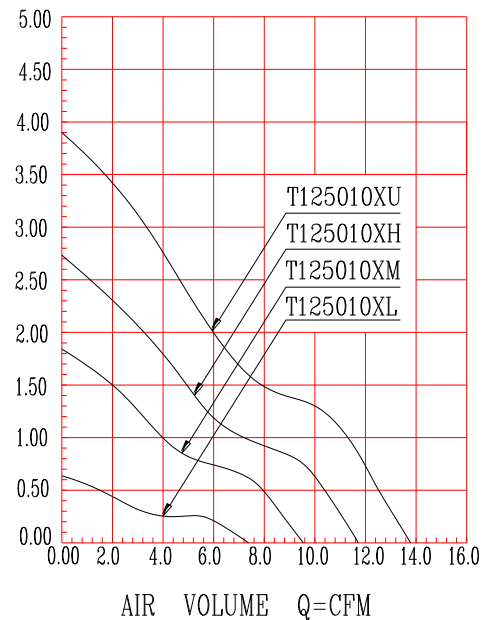

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
R125010SL	12	7~13.2	0.13	1.56	3500	7.45	0.21	0.61	21.1
R125010SM	12	7~13.2	0.15	1.80	4500	9.58	0.27	1.87	25.7
R125010SH	12	7~13.2	0.25	3.00	5500	11.71	0.33	2.79	30.1
R125010SU	12	7~13.2	0.32	3.84	6500	13.84	0.39	3.90	34.7
R125010BL	12	7~13.2	0.13	1.56	3500	7.45	0.21	0.61	21.1
R125010BM	12	7~13.2	0.15	1.80	4500	9.58	0.27	1.87	25.7
R125010BH	12	7~13.2	0.25	3.00	5500	11.71	0.33	2.79	30.1
R125010BU	12	7~13.2	0.32	3.84	6500	13.84	0.39	3.90	34.7

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

50×50×11MM SERIES

Bearing Type: Two ball bearing
EBR

Rated Voltage: 12V/24V


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)


Protection : Auto-Restart /Impedance

Operating Temp : ~10~70℃

Weight : 24g

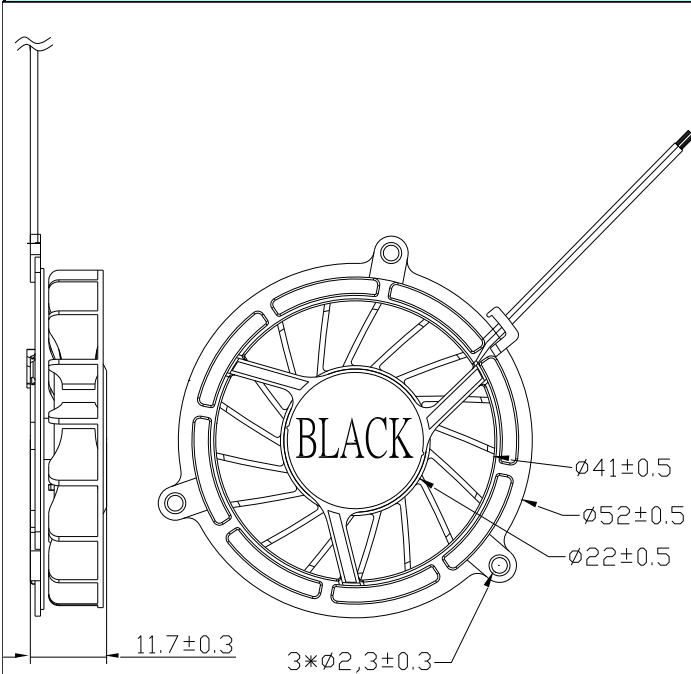

AIR FLOW-AIR PRESSURE (PERFORMANCE CURVES)

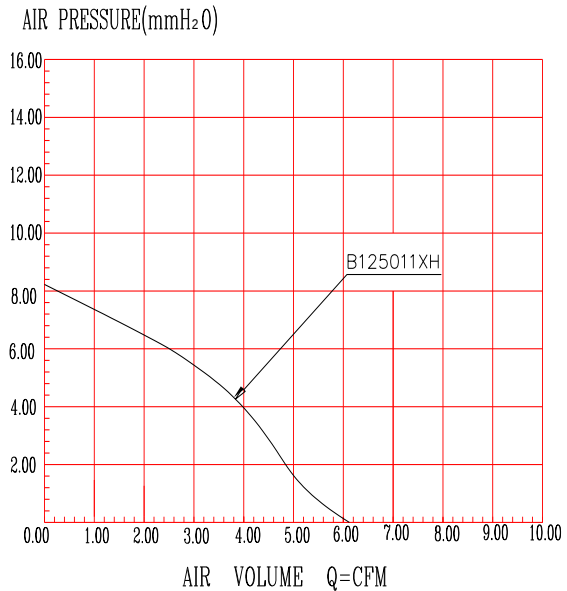

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
B125011BH (In Module)	12	7~13.2	0.35	4.20	3500	6.16	0.17	8.28	29.6

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

50×50×15MM SERIES

Bearing Type: Two ball bearing
EBR

Rated Voltage: 12V/24V


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance


Operating Temp : ~10~70℃

Weight : 30g

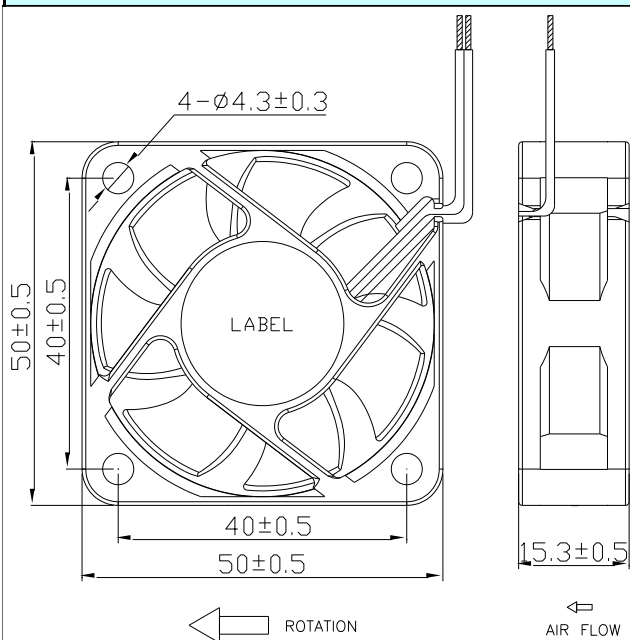

AIR FLOW-AIR PRESSURE (PERFORMANCE CURVES)

AIR PRESSURE(mmH₂O)

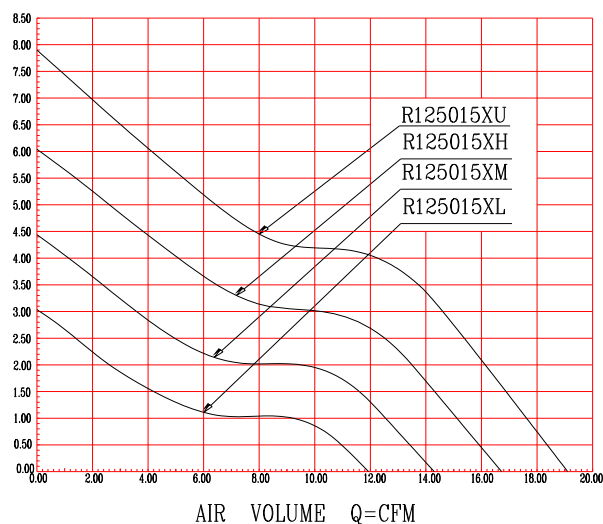

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
R125015BL	12	7~13.2	0.20	2.40	5000	11.97	0.34	3.08	26.5
R125015BM	12	7~13.2	0.25	3.00	6000	14.36	0.41	4.44	30.2
R125015BH	12	7~13.2	0.32	3.84	7000	16.76	0.47	6.05	35.3
R125015BU	12	7~13.2	0.60	7.20	8000	19.15	0.54	7.90	39.3
R125015SL	12	7~13.2	0.20	2.40	5000	11.97	0.34	3.08	26.5
R125015SM	12	7~13.2	0.25	3.00	6000	14.36	0.41	4.44	30.2
R125015SH	12	7~13.2	0.32	3.84	7000	16.76	0.47	6.05	35.3
R125015SU	12	7~13.2	0.60	7.20	8000	19.15	0.54	7.90	39.3

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

50×50×20MM SERIES

Bearing Type: Two ball bearing

EBR

Rated Voltage 12V/24V


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)


Protection : Auto-Restart /Impedance

Operating Temp : ~10~70℃

Weight : 28g

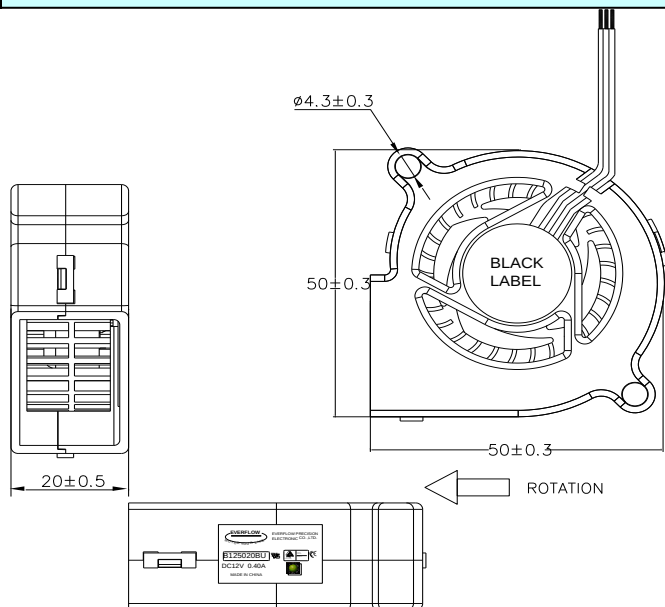

AIR FLOW—AIR PRESSURE (PERFORMANCE CURVES)
STATIC PRESSURE (mmH₂O)

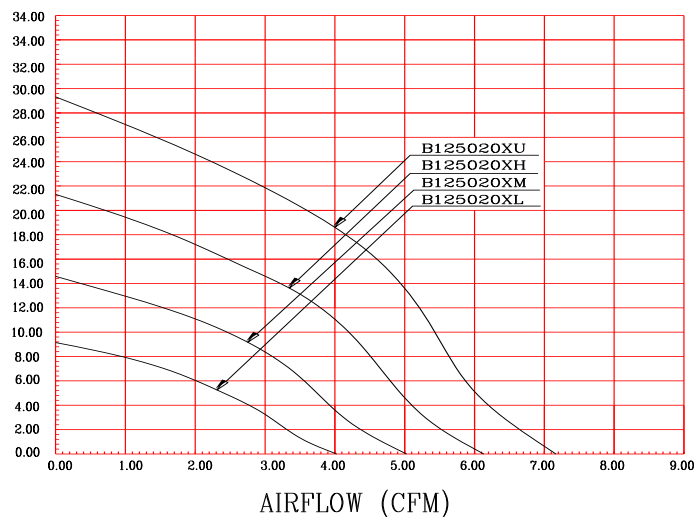

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
BB5020BL	12	7~13.2	0.12	1.44	3800	4.01	0.11	9.17	28
BB5020BM	12	7~13.2	0.20	2.40	4800	5.07	0.14	14.62	32
BB5020BH	12	7~13.2	0.30	3.60	5800	6.12	0.17	21.35	37
BB5020BU	12	7~13.2	0.40	4.80	6800	7.18	0.20	29.35	40
BB5020SL	12	7~13.2	0.12	1.44	3800	4.01	0.11	9.17	28
BB5020SM	12	7~13.2	0.20	2.40	4800	5.07	0.14	14.62	32
BB5020SH	12	7~13.2	0.30	3.60	5800	6.12	0.17	21.35	37
BB5020SU	12	7~13.2	0.40	4.80	6800	7.18	0.20	29.35	40

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

50×50×20MM SERIES

Bearing Type: Two ball bearing
EBR

Rated Voltage: 12V/24V


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance


Operating Temp : ~10~70℃

Weight : 33g

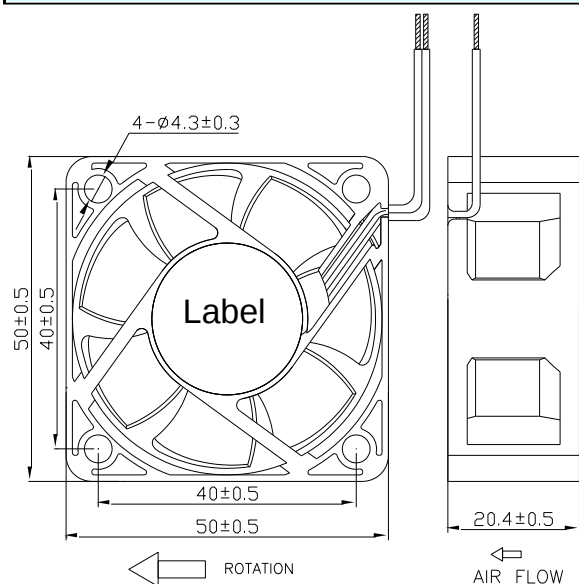

AIR PRESURE-AIR FLOW (PERFORMANCE CURVES)

AIR PRESSURE(mmH₂O)

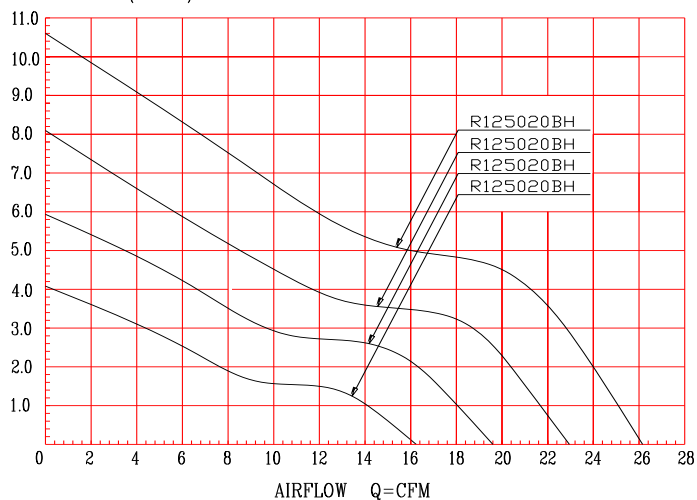

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
R125020BL	12	7~13.2	0.20	2.4	5000	16.33	0.46	4.14	29
R125020BM	12	7~13.2	0.35	4.2	6000	19.60	0.56	5.96	33.2
R125020BH	12	7~13.2	0.55	6.6	7000	22.86	0.65	8.12	37.2
R125020BU	12	7~13.2	0.70	8.4	8000	26.13	0.74	10.60	42.8
R125020SL	12	7~13.2	0.20	2.4	5000	16.33	0.46	4.14	29
R125020SM	12	7~13.2	0.35	4.2	6000	19.60	0.56	5.96	33.2
R125020SH	12	7~13.2	0.55	6.6	7000	22.86	0.65	8.12	37.2
R125020SU	12	7~13.2	0.70	8.4	8000	26.13	0.74	10.60	42.8

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

60×60×10MM SERIES

Bearing Type: Two ball bearing

EBR

Rated Voltage: 5V/12V


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)


Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 14g

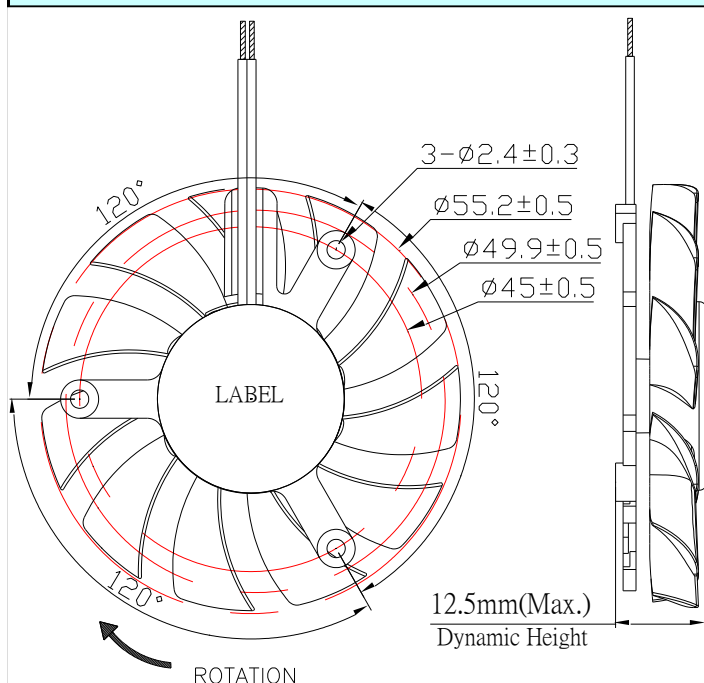

AIR FLOW-AIR PRESSURE (PERFORMANCE CURVES)

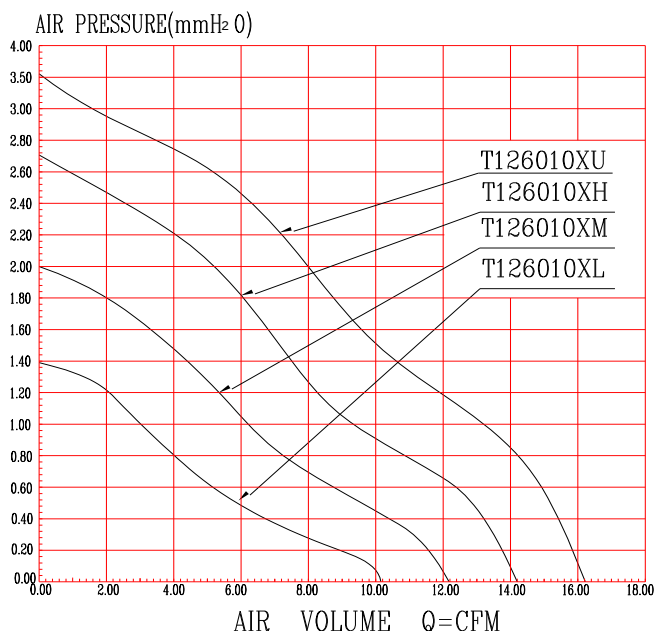

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure	Sound level
								(mmH2O)	(dB(A))
T126010BL	12	7~13.2	0.10	1.20	3000	10.14	0.29	1.39	26
T126010BM	12	7~13.2	0.14	1.68	3600	12.17	0.34	2.0	30
T126010BH	12	7~13.2	0.20	2.40	4200	14.20	0.40	2.72	35
T126010BU	12	7~13.2	0.25	3.00	4800	16.23	0.46	3.55	39
T126010SL	12	7~13.2	0.10	1.20	3000	10.14	0.29	1.39	26
T126010SM	12	7~13.2	0.14	1.68	3600	12.17	0.34	2.0	30
T126010SH	12	7~13.2	0.18	2.16	4200	14.20	0.40	2.72	35
T126010SU	12	7~13.2	0.25	3.00	4800	16.23	0.46	3.55	39

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

60×60×10MM SERIES

Bearing Type: Two ball bearing
EBR

Rated Voltage: 5V/12V


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance


Operating Temp : ~10~70℃

Weight : 15g

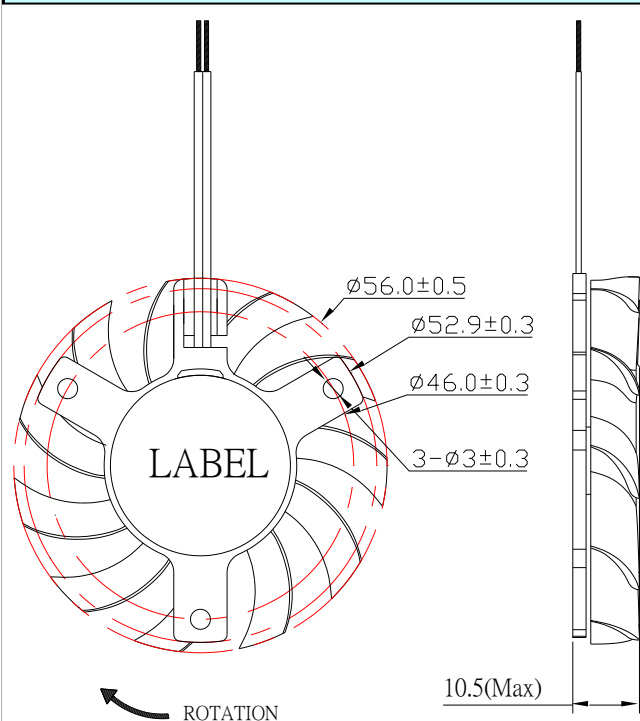

AIR FLOW-AIR PRESSURE (PERFORMANCE CURVES)

AIR PRESSURE(mmH₂O)

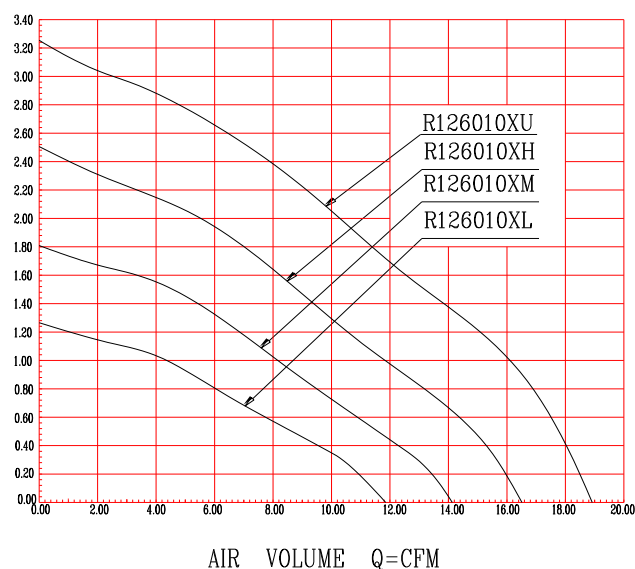

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
R126010BL	12	7~13.2	0.10	1.20	3000	11.82	0.33	1.28	22.9
R126010BM	12	7~13.2	0.14	1.68	3600	14.19	0.40	1.84	27.7
R126010BH	12	7~13.2	0.20	2.40	4200	16.56	0.47	2.50	31.2
R126010BU	12	7~13.2	0.25	3.00	4800	18.93	0.54	3.26	37
R126010SL	12	7~13.2	0.10	1.20	3000	11.82	0.33	1.28	22.9
R126010SM	12	7~13.2	0.14	1.68	3600	14.19	0.40	1.84	27.7
R126010SH	12	7~13.2	0.18	2.16	4200	16.56	0.47	2.50	31.2
R126010SU	12	7~13.2	0.25	3.00	4800	18.93	0.54	3.26	37

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

60×60×10MM SERIES

Bearing Type: Two ball bearing
EBR

Rated Voltage: 5V/12V


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance


Operating Temp : ~10~70℃

Weight : 30g

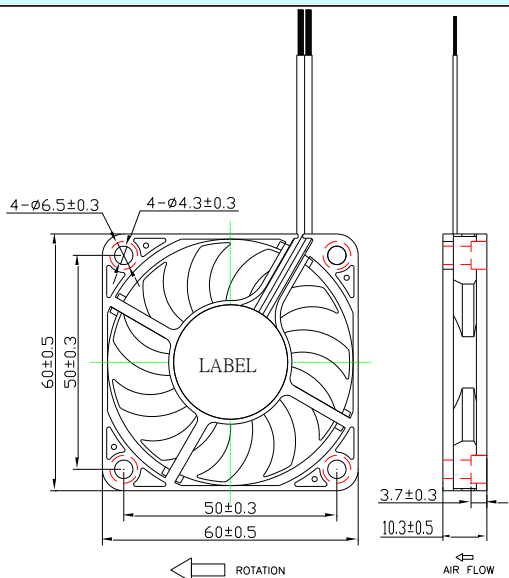

AIR FLOW-AIR PRESSURE (PERFORMANCE CURVES)

AIR PRESSURE(mmH₂O)

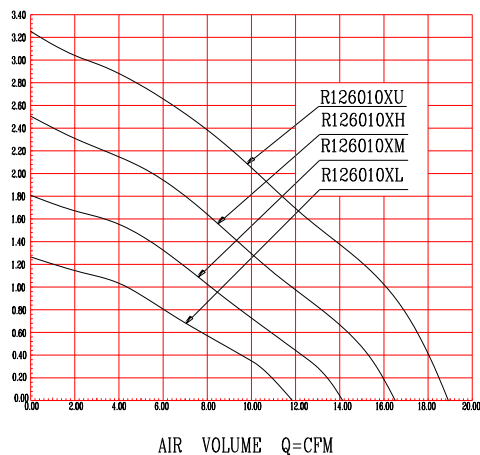

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
R126010BL	12	7~13.2	0.10	1.20	3000	11.82	0.33	1.28	22.9
R126010BM	12	7~13.2	0.14	1.68	3600	14.19	0.40	1.84	27.7
R126010BH	12	7~13.2	0.20	2.40	4200	16.56	0.47	2.50	31.2
R126010BU	12	7~13.2	0.25	3.00	4800	18.93	0.54	3.26	37
R126010SL	12	7~13.2	0.10	1.20	3000	11.82	0.33	1.28	22.9
R126010SM	12	7~13.2	0.14	1.68	3600	14.19	0.40	1.84	27.7
R126010SH	12	7~13.2	0.18	2.16	4200	16.56	0.47	2.50	31.2
R126010SU	12	7~13.2	0.25	3.00	4800	18.93	0.54	3.26	37

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

60×60×15MM SERIES

Bearing Type: Two ball bearing

Rated Voltage: 12V/24V


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)


Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 40g

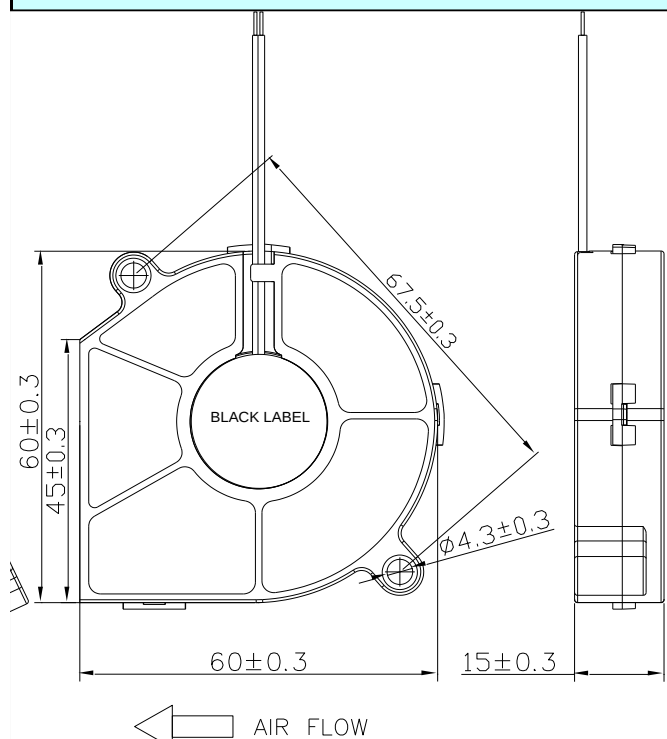

AIR FLOW-AIR PRESSURE (PERFORMANCE CURVES)

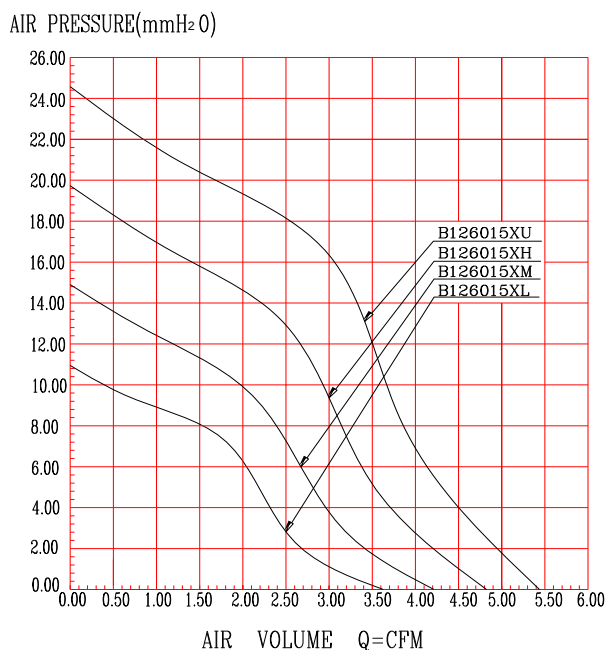

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
B126015BL	12	7~13.2	0.14	1.68	3600	3.65	0.10	10.93	33.4
B126015BM	12	7~13.2	0.20	2.40	4200	4.26	0.12	14.88	38
B126015BH	12	7~13.2	0.30	3.60	4800	4.87	0.14	19.44	42.1
B126015BU	12	7~13.2	0.40	4.80	5400	5.48	0.16	24.60	45.8

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

60×60×15MM SERIES

Bearing Type: Two ball bearing

Rated Voltage: 12V/24V


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance


Operating Temp : ~10~70℃

Weight : 40g

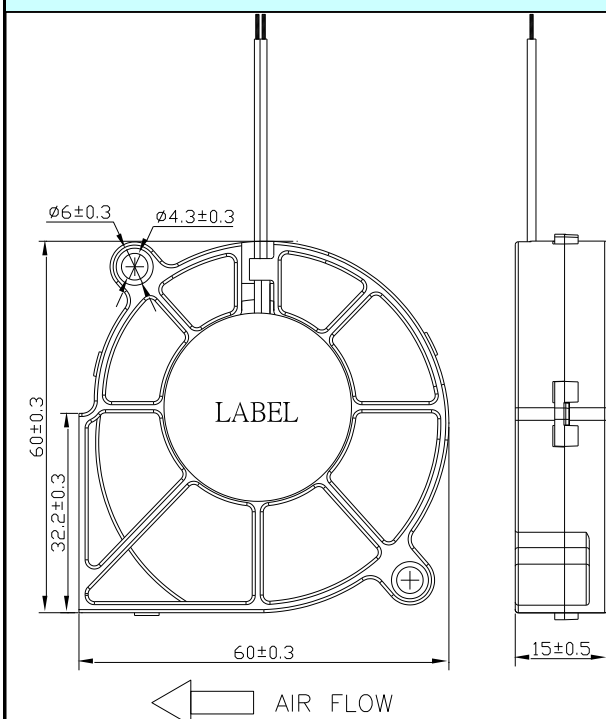

AIR FLOW-AIR PRESSURE (PERFORMANCE CURVES)

AIR PRESSURE(mmH₂O)

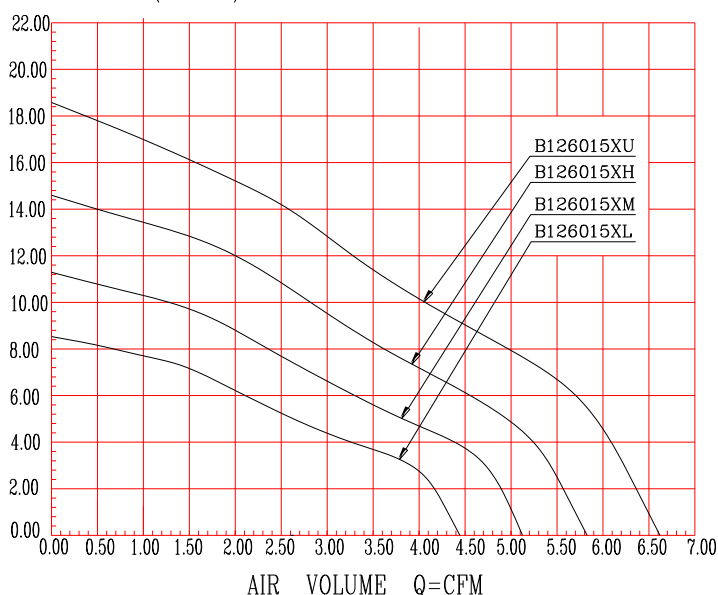

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
B126015BL	12	7~13.2	0.14	1.68	3600	4.41	0.13	8.29	34.7
B126015BM	12	7~13.2	0.20	2.40	4200	5.15	0.15	11.28	37.8
B126015BH	12	7~13.2	0.30	3.60	4800	5.88	0.17	14.73	41.8
B126015BU	12	7~13.2	0.40	4.80	5400	6.61	0.19	18.64	44.7

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

60×60×15MM SERIES

Bearing Type: Two ball bearing

EBR

Rated Voltage: 12V/24V


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance


Operating Temp : ~10~70℃

Weight : 40g

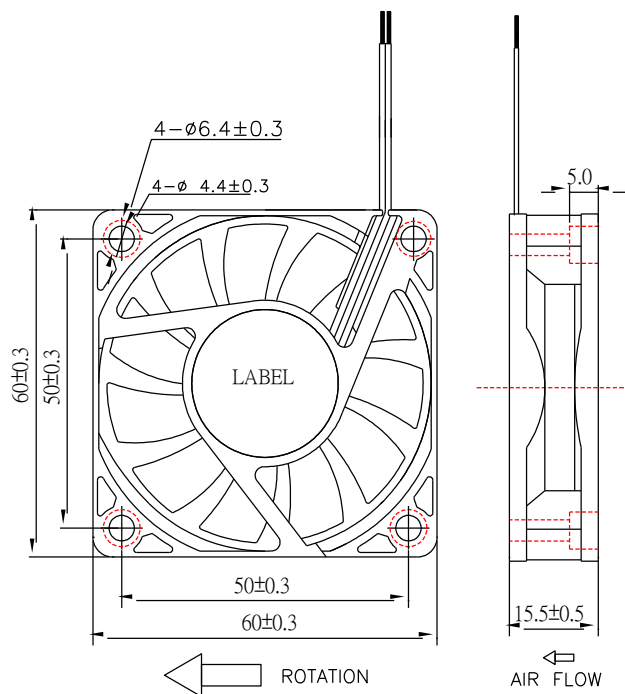

AIR FLOW-AIR PRESSURE(PERFORMANCE CURVES)

AIR PRESSURE(mmH₂O)

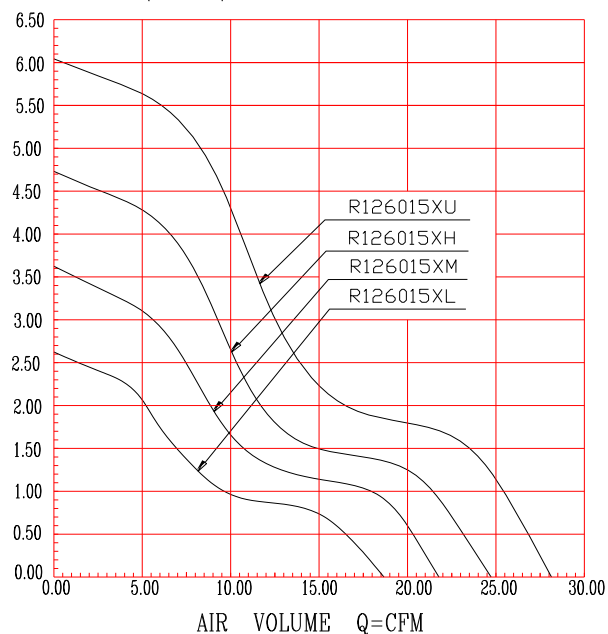

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
R126015BL	12	7~13.2	0.14	1.68	3600	18.69	0.53	2.68	26.9
R126015BM	12	7~13.2	0.20	2.40	4200	21.81	0.62	3.65	30.8
R126015BH	12	7~13.2	0.30	3.60	4800	24.93	0.71	4.77	33.9
R126015BU	12	7~13.2	0.40	4.80	5400	28.05	0.79	6.04	37
R126015SL	12	7~13.2	0.14	1.68	3600	18.69	0.53	2.68	26.9
R126015SM	12	7~13.2	0.20	2.40	4200	21.81	0.62	3.65	30.8
R126015SH	12	7~13.2	0.30	3.60	4800	24.93	0.71	4.77	33.9
R126015SU	12	7~13.2	0.40	4.80	5400	28.05	0.79	6.04	37

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

60×60×20MM SERIES

Bearing Type: Two ball bearing
EBR

Rated Voltage 12V/24V


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance


Operating Temp : ~10~70℃

Weight : 57g

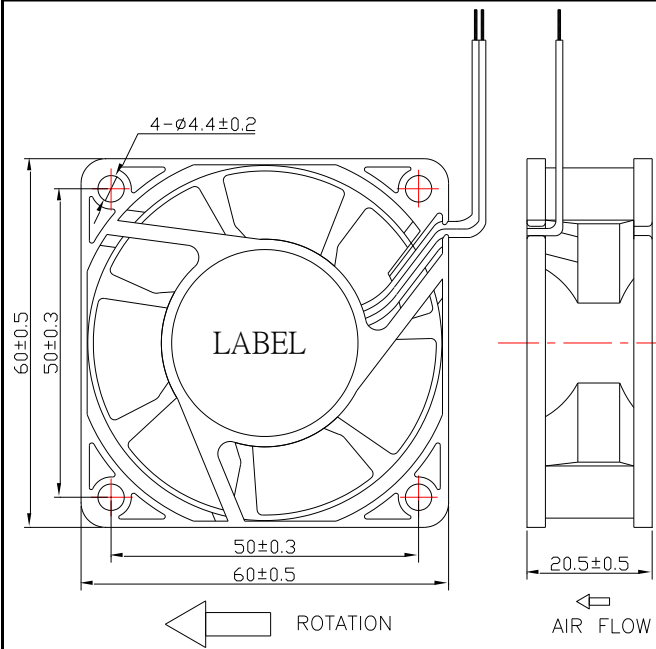

AIR FLOW-AIR PRESSURE(PERFORMANCE CURVES)

AIR PRESSURE(mmH₂O)

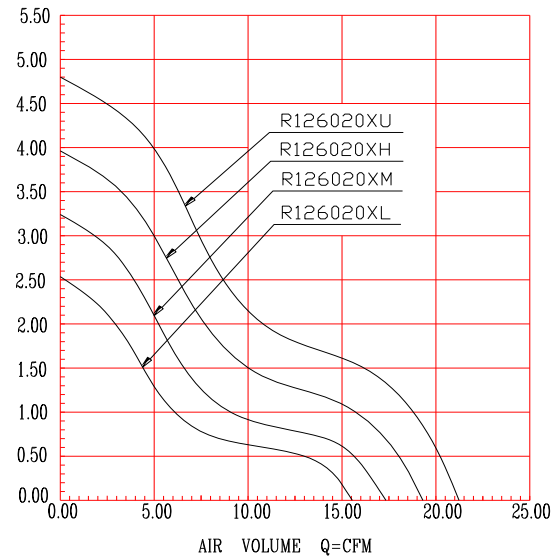

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
R126020BL	12	7~13.2	0.09	1.08	3200	15.52	0.44	2.54	26.5
R126020BM	12	7~13.2	0.12	1.44	3600	17.46	0.49	3.22	28.1
R126020BH	12	7~13.2	0.15	1.80	4000	19.40	0.55	3.97	30
R126020BU	12	7~13.2	0.20	2.40	4400	21.34	0.60	4.80	32.5
R126020SL	12	7~13.2	0.09	1.08	3200	15.52	0.44	2.54	26.5
R126020SM	12	7~13.2	0.12	1.44	3600	17.46	0.49	3.22	28.1
R126020SH	12	7~13.2	0.15	1.80	4000	19.40	0.55	3.97	30
R126020SU	12	7~13.2	0.20	2.40	4400	21.34	0.60	4.80	32.5

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

60×60×25MM SERIES

Bearing Type: Two ball bearing
EBR

Rated Voltage: 12V/24V


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance


Operating Temp : ~10~70℃

Weight : 50g

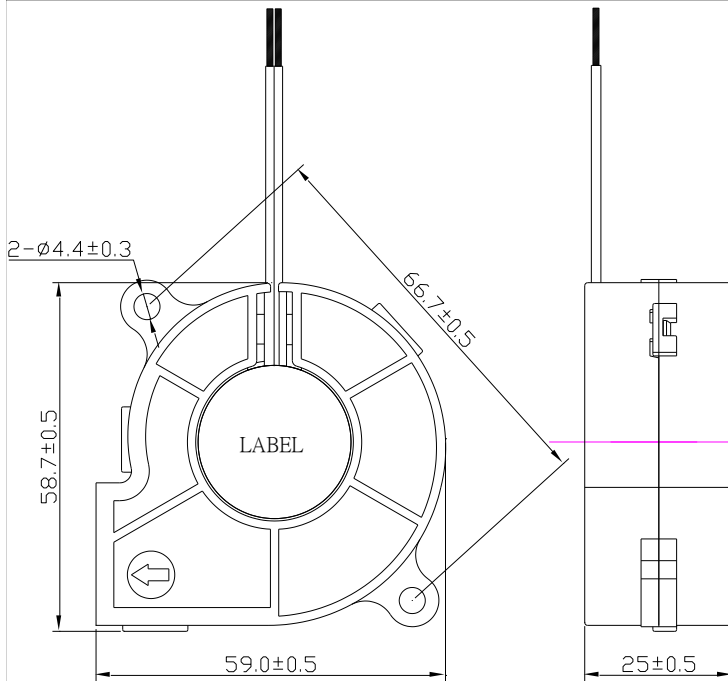

AIR FLOW-AIR PRESSURE (PERFORMANCE CURVES)

STATIC PRESSURE (mmH₂O)

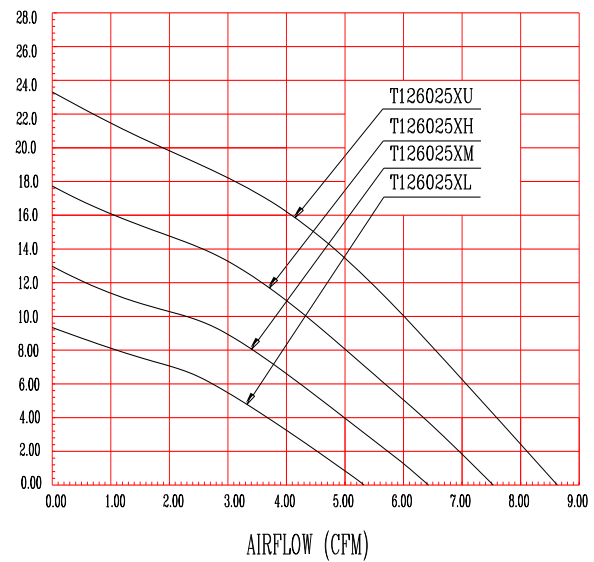

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
T126025 BL	12	7~13.2	0.12	1.44	3000	5.40	0.15	9.10	28.7
T126025 BM	12	7~13.2	0.16	1.92	3600	6.48	0.18	13.11	33.7
T126025 BH	12	7~13.2	0.22	2.64	4200	7.56	0.21	17.84	36.6
T126025 BU	12	7~13.2	0.26	3.12	4800	8.64	0.24	23.30	38.5

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

60×60×25MM SERIES

Bearing Type: Two ball bearing
EBR

Rated Voltage: 12v L.M.H.U

24v L.M.H.U 48v U


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance


Operating Temp : ~10~70°C

Weight : 63g

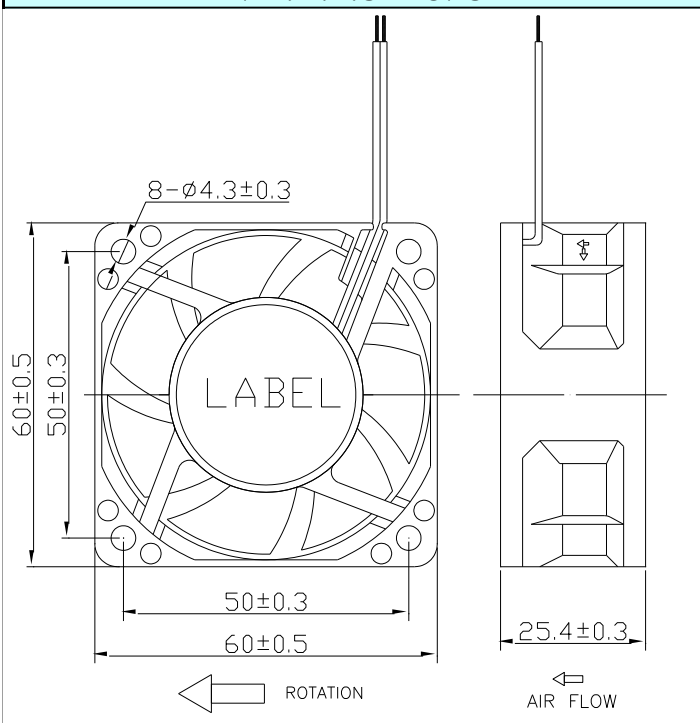

AIR FLOW-AIR PRESSURE(PERFORMANCE CURVES)

AIR PRESSURE(mmH₂O)

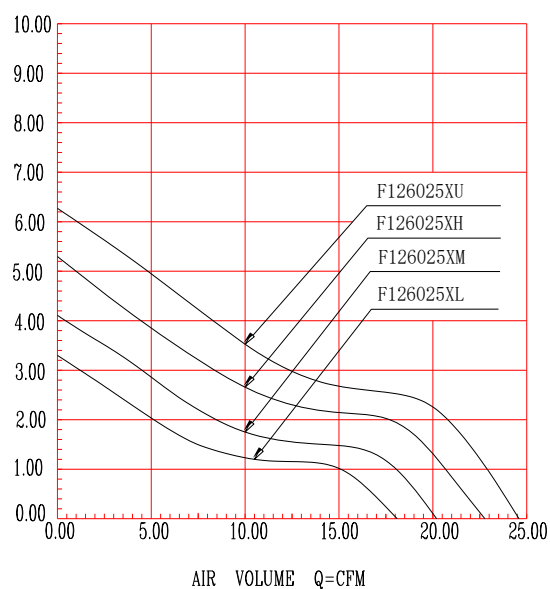

此機種有8孔及4孔基架.

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
F126025BL	12	7~13.2	0.12	1.44	3600	18.06	0.51	3.35	23.4
F126025BM	12	7~13.2	0.16	1.92	4000	20.07	0.57	4.14	26.9
F126025BH	12	7~13.2	0.22	2.64	4550	22.83	0.65	5.36	30.5
F126025BU	12	7~13.2	0.26	3.12	4900	24.59	0.70	6.22	33.5
F126025SL	12	7~13.2	0.12	1.44	3600	18.06	0.51	3.35	23.4
F126025SM	12	7~13.2	0.16	1.92	4000	20.07	0.57	4.14	26.9
F126025SH	12	7~13.2	0.22	2.64	4550	22.83	0.65	5.36	30.5
F126025SU	12	7~13.2	0.26	3.12	4900	24.59	0.70	6.22	33.5

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

60×60×25MM SERIES

Bearing Type: Two ball bearing
EBR

Rated Voltage: 12V/24V


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance


Operating Temp : ~10~70°C

Weight : 50g

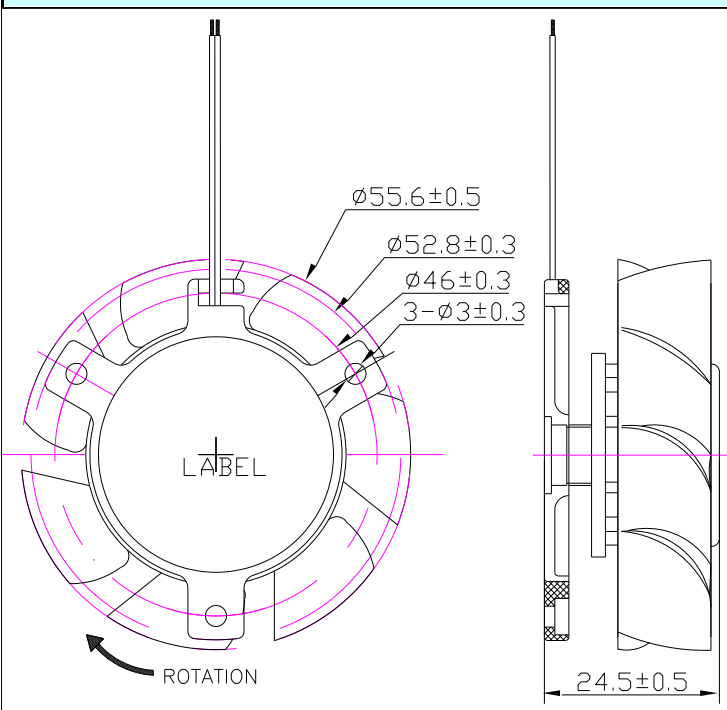

AIR FLOW-AIR PRESSURE(PERFORMANCE CURVES)

AIR PRESSURE(mmH₂O)

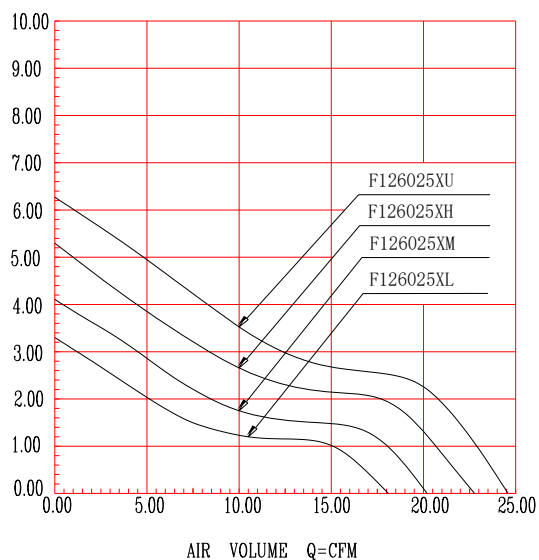

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
F126025BL	12	7~13.2	0.12	1.44	3600	18.06	0.51	3.35	23.4
F126025BM	12	7~13.2	0.16	1.92	4000	20.07	0.57	4.14	26.9
F126025BH	12	7~13.2	0.22	2.64	4550	22.83	0.65	5.36	30.5
F126025BU	12	7~13.2	0.26	3.12	4900	24.59	0.70	6.22	33.5
F126025SL	12	7~13.2	0.12	1.44	3600	18.06	0.51	3.35	23.4
F126025SM	12	7~13.2	0.16	1.92	4000	20.07	0.57	4.14	26.9
F126025SH	12	7~13.2	0.22	2.64	4550	22.83	0.65	5.36	30.5
F126025SU	12	7~13.2	0.26	3.12	4900	24.59	0.70	6.22	33.5

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

70×70×10MM SERIES

Bearing Type: Two ball bearing

One Ball One Sleeve Bearing

Rated Voltage: 12v L.M.H.U


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)


Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 20g

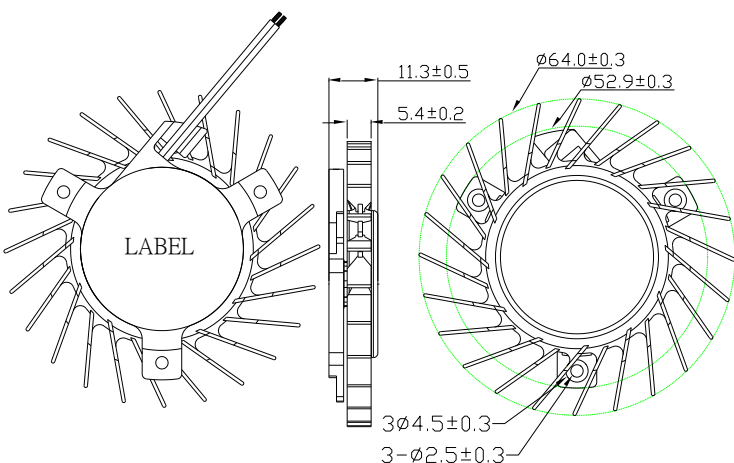

AIR PRESURE-AIR FLOW (PERFORMANCE CURVES)
AIR PRESSURE (mmH₂O)

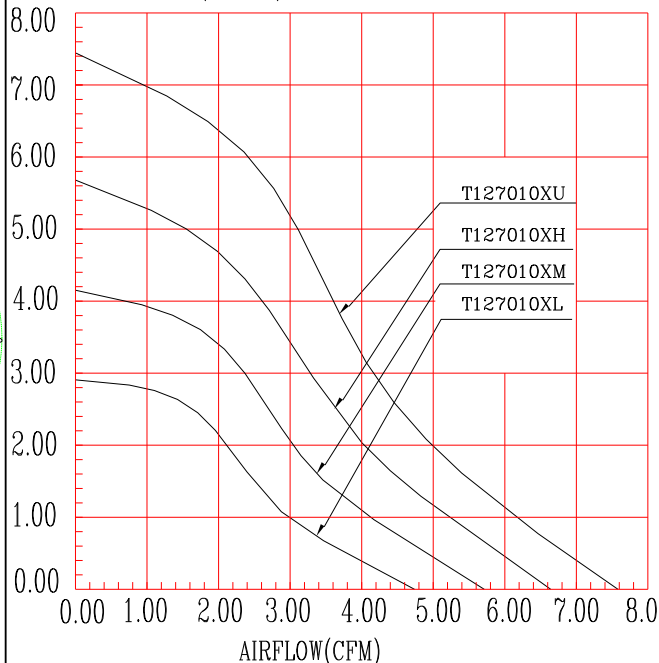

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
T127010BL	12	7~13.2	0.18	2.16	3000	4.74	0.13	2.90	26.7
T127010BM	12	7~13.2	0.25	3.00	3600	5.68	0.16	4.17	31
T127010BH	12	7~13.2	0.35	4.20	4200	6.63	0.19	5.68	40.6
T127010BU	12	7~13.2	0.45	5.40	4800	7.58	0.21	7.42	44.1
T127010DL	12	7~13.2	0.18	2.16	3000	4.74	0.13	2.90	26.7
T127010DM	12	7~13.2	0.25	3.00	3600	5.68	0.16	4.17	31
T127010DH	12	7~13.2	0.35	4.20	4200	6.63	0.19	5.68	40.6
T127010DU	12	7~13.2	0.45	5.40	4800	7.58	0.21	7.42	44.1

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

70×70×10MM SERIES

Bearing Type: Two ball bearing
EBR

Rated Voltage: 12v L.M.H.U


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)


Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 14g

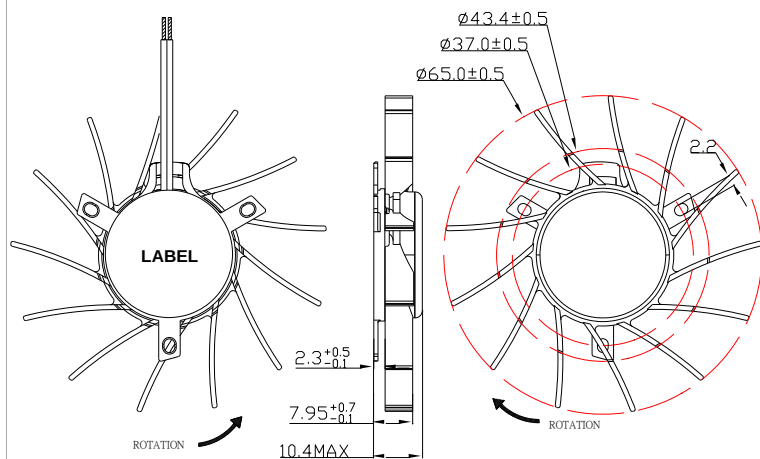

AIR PRESSURE-AIR FLOW (PERFORMANCE CURVES)
AIR PRESSURE (mmH₂O)

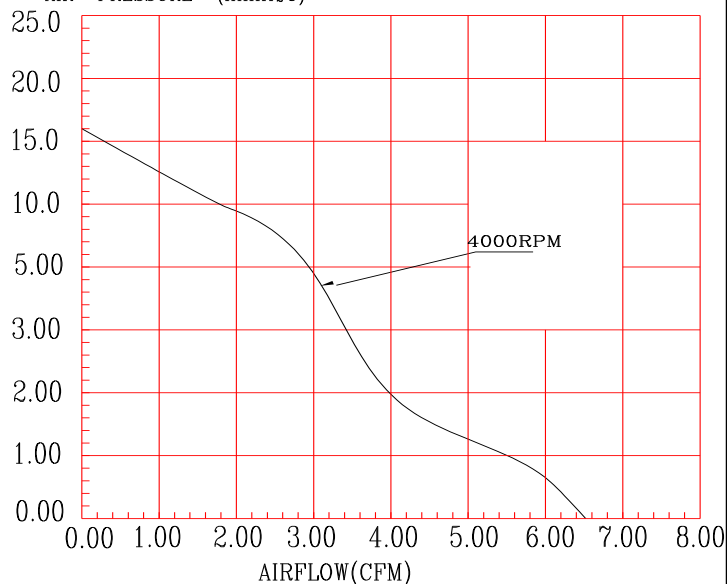

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
T127010*U (IN MODUL)	12	7~13.2	0.45	5.40	3200	6.50	0.18	16	32

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

70x70x10MM SERIES

Bearing Type: Two ball bearing
EBR

Rated Voltage: 12v L.M.H.U



Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 17g

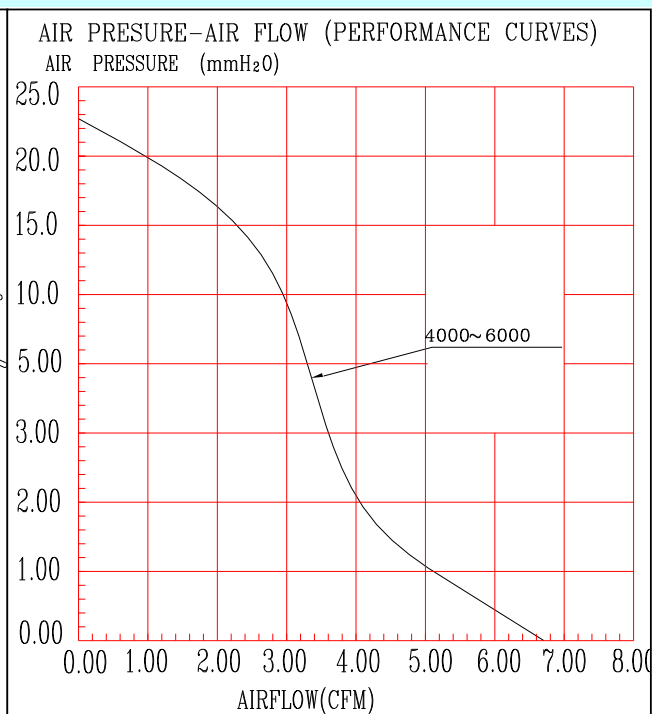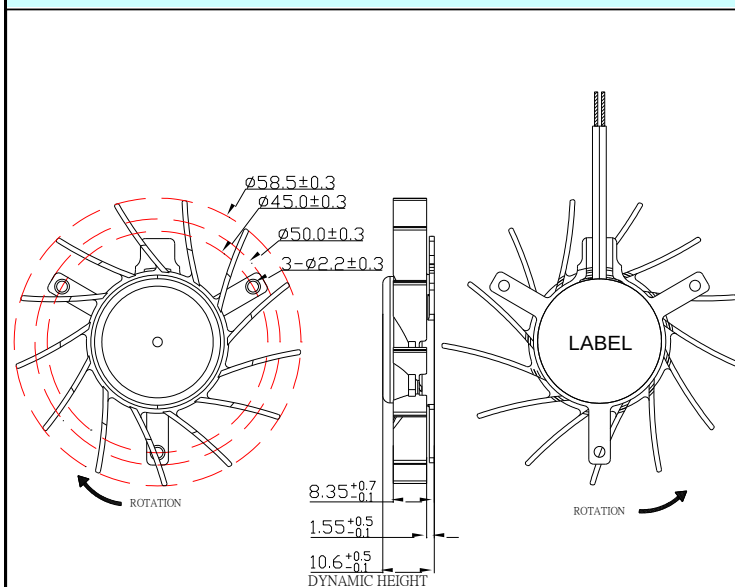

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
T127010*U (IN MODUL)	12	7~13.2	0.45	5.40	4000~4600	5.69	0.16	22.7	32

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

70×70×10MM SERIES

Bearing Type: Two ball bearing
EBR

Rated Voltage: 12v L.M.H.U


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)


Protection : Auto-Restart /Impedance

Operating Temp : ~10~70℃

Weight : 20g

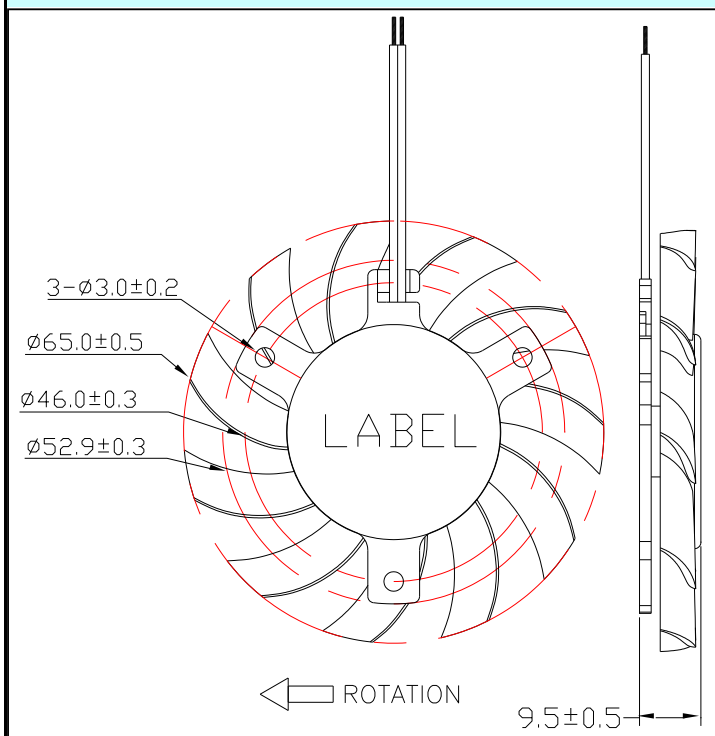

AIR FLOW-AIR PRESSURE(PERFORMANCE CURVES)

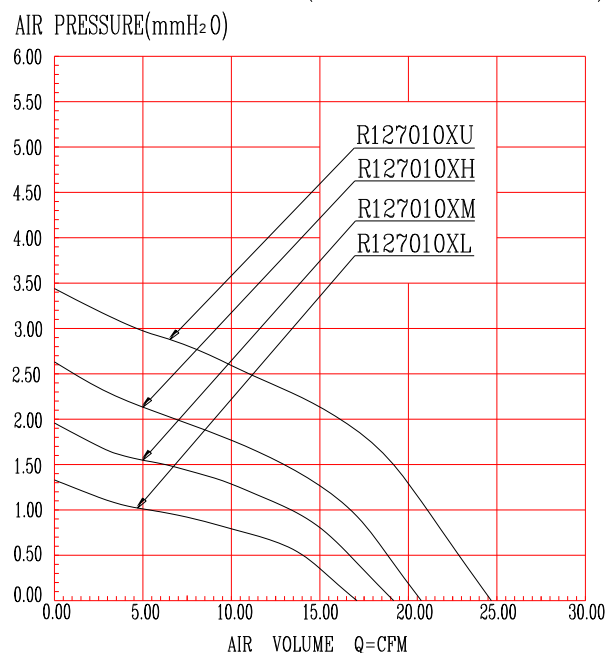

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
T127010BL	12	7~13.2	0.18	2.16	3000	15.42	0.44	1.34	27.3
T127010BM	12	7~13.2	0.25	3.00	3600	18.51	0.52	1.93	31.1
T127010BH	12	7~13.2	0.35	4.20	4200	21.60	0.61	2.63	36.7
T127010BU	12	7~13.2	0.45	5.40	4800	24.69	0.70	3.43	40.3
T127010SL	12	7~13.2	0.18	2.16	3000	15.42	0.44	1.34	27.3
T127010SM	12	7~13.2	0.25	3.00	3600	18.51	0.52	1.93	31.1
T127010SH	12	7~13.2	0.35	4.20	4200	21.60	0.61	2.63	36.7
T127010SU	12	7~13.2	0.45	5.40	4800	24.69	0.70	3.43	40.3

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

70×70×10MM SERIES

Bearing Type: Two ball bearing
EBR

Rated Voltage: 12v L.M.H.U



Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 17g

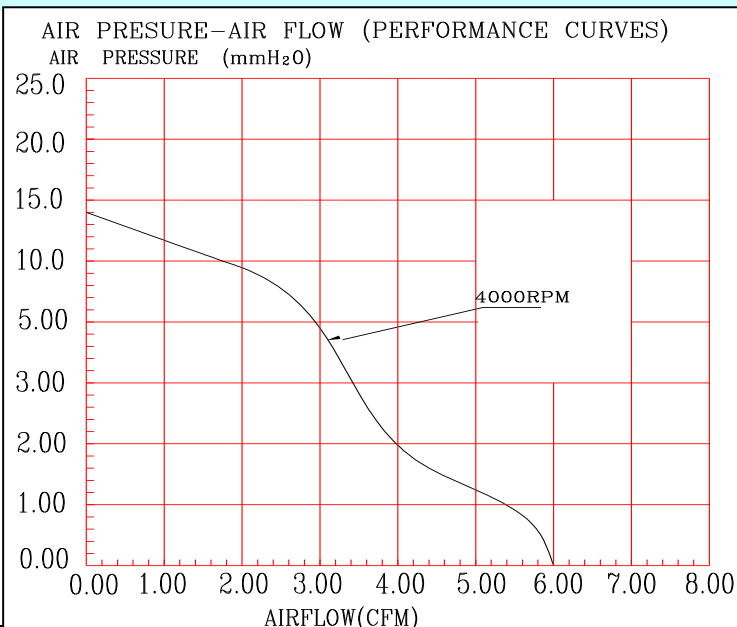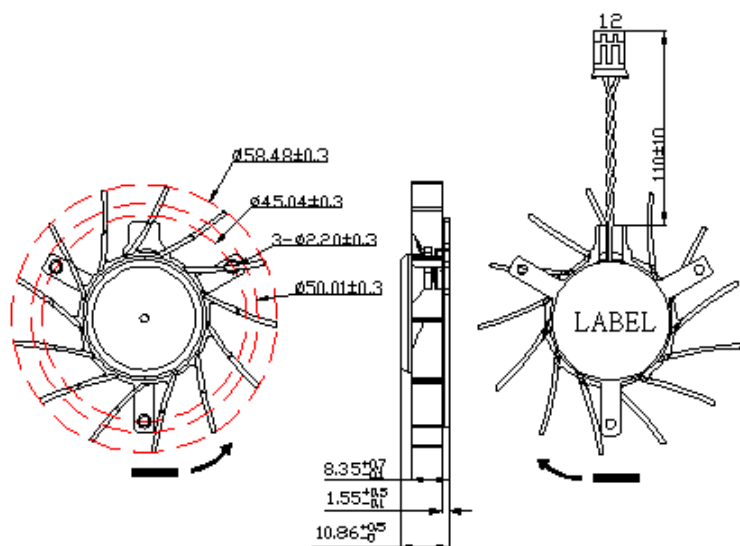

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
T127010SU (IN MODUL)	12	7~13.2	0.45	5.40	4000	6.00	0.17	14	32.5

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

70×70×10MM SERIES

Bearing Type: Two ball bearing
EBR

Rated Voltage: 5V/12V


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance


Operating Temp : ~10~70℃

Weight : 35g

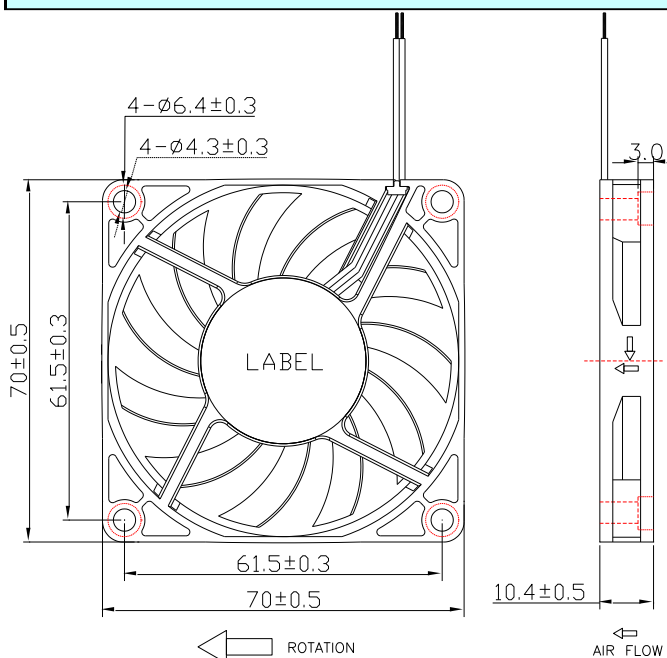

AIR FLOW-AIR PRESSURE(PERFORMANCE CURVES)

AIR PRESSURE(mmH₂O)

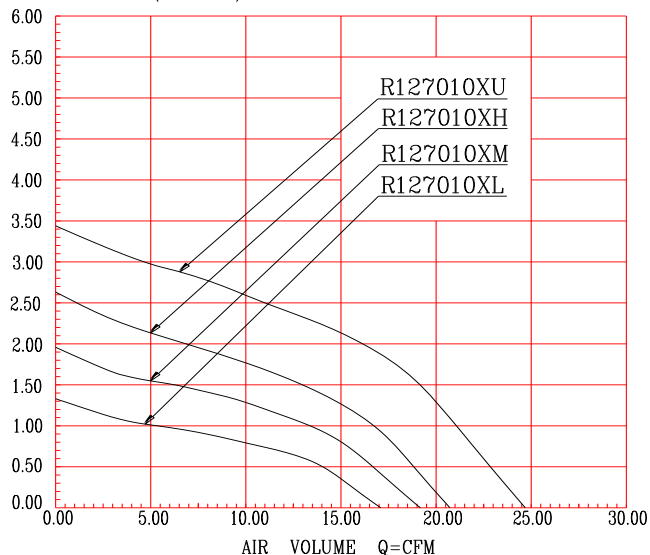

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
R127010BL	12	7~13.2	0.18	2.16	3000	15.42	0.44	1.34	27.3
R127010BM	12	7~13.2	0.25	3.00	3600	18.51	0.52	1.93	31.1
R127010BH	12	7~13.2	0.35	4.20	4200	21.60	0.61	2.63	36.7
R127010BU	12	7~13.2	0.45	5.40	4800	24.69	0.70	3.43	40.3
R127010SL	12	7~13.2	0.18	2.16	3000	15.42	0.44	1.34	27.3
R127010SM	12	7~13.2	0.25	3.00	3600	18.51	0.52	1.93	31.1
R127010SH	12	7~13.2	0.35	4.20	4200	21.60	0.61	2.63	36.7
R127010SU	12	7~13.2	0.45	5.40	4800	24.69	0.70	3.43	40.3

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

T7015MM SERIES

Bearing Type: Two ball bearing
EBR

Rated Voltage 12V/24V


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)


Protection : Auto-Restart /Impedance

Operating Temp : ~10~70℃

Weight : 32g

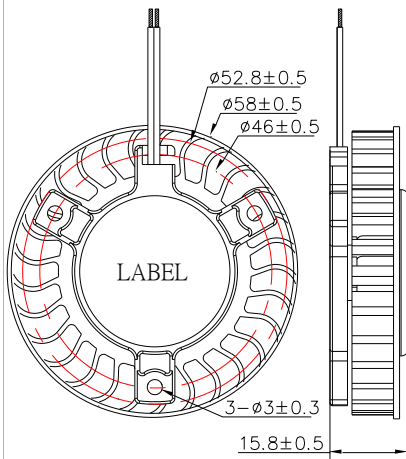

AIR FLOW-AIR PRESSURE (PERFORMANCE CURVES)
AIR PRESSURE(mmH₂O)

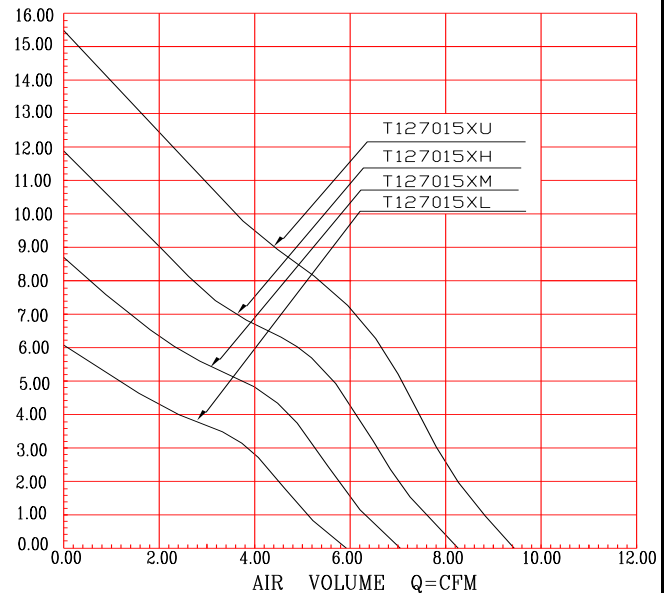

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Maximum Air Flow		Maximum Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
T127015BL	12	7~13.2	0.12	1.44	3000	5.93	0.17	6.08	37.5
T127015BM	12	7~13.2	0.15	1.80	3600	7.12	0.20	8.75	43.0
T127015BH	12	7~13.2	0.25	3.00	4200	8.30	0.24	11.91	45.0
T127015BU	12	7~13.2	0.30	3.60	4800	9.49	0.27	15.55	48.5
T127015SL	12	7~13.2	0.12	1.44	3000	5.93	0.17	6.08	37.5
T127015SM	12	7~13.2	0.15	1.80	3600	7.12	0.20	8.75	43.0
T127015SH	12	7~13.2	0.25	3.00	4200	8.30	0.24	11.91	45.0
T127015SU	12	7~13.2	0.30	3.60	4800	9.49	0.27	15.55	48.5

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

70×70×15MM SERIES (SIXTH)

Bearing Type: Two ball bearing

EBR

Rated Voltage: 12V/24V


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance


Operating Temp : ~10~70℃

Weight : 32g

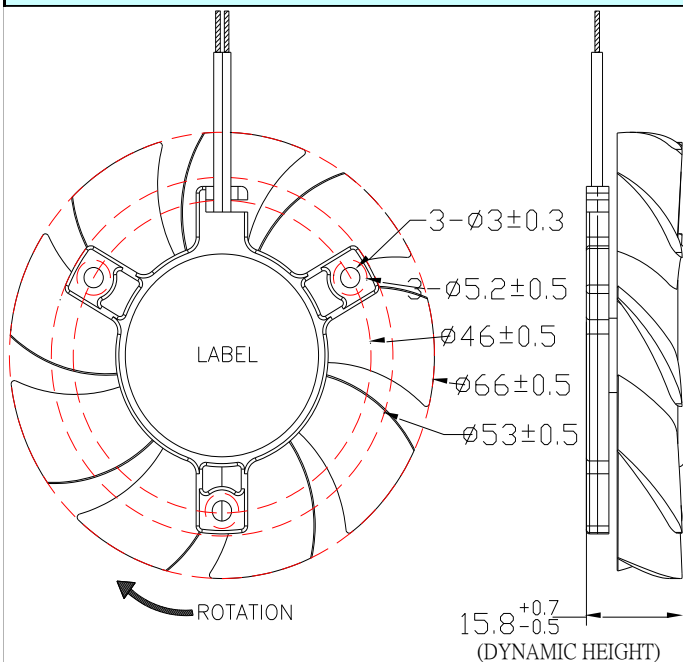

AIR FLOW-AIR PRESSURE(PERFORMANCE CURVES)

AIR PRESSURE(mmH₂O)

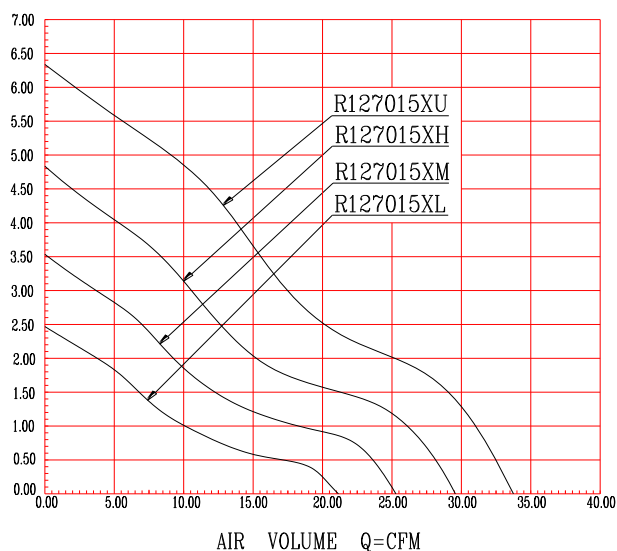

T7015孔距有46mm及45mm

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
T127015BL	12	7~13.2	0.12	1.44	3000	21.13	0.60	2.49	29.1
T127015BM	12	7~13.2	0.15	1.80	3600	25.36	0.72	3.59	32.8
T127015BH	12	7~13.2	0.25	3.00	4200	29.59	0.84	4.88	37
T127015BU	12	7~13.2	0.30	3.60	4800	33.82	0.96	6.38	42.4
T127015SL	12	7~13.2	0.12	1.44	3000	21.13	0.60	2.49	29.1
T127015SM	12	7~13.2	0.15	1.80	3600	25.36	0.72	3.59	32.8
T127015SH	12	7~13.2	0.25	3.00	4200	29.59	0.84	4.88	37
T127015SU	12	7~13.2	0.30	3.60	4800	33.82	0.96	6.38	42.4

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

70×70×15MM SERIES (seventh)

Bearing Type: Two ball bearing

EBR

Rated Voltage 12V/24V


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C


Weight : 34g

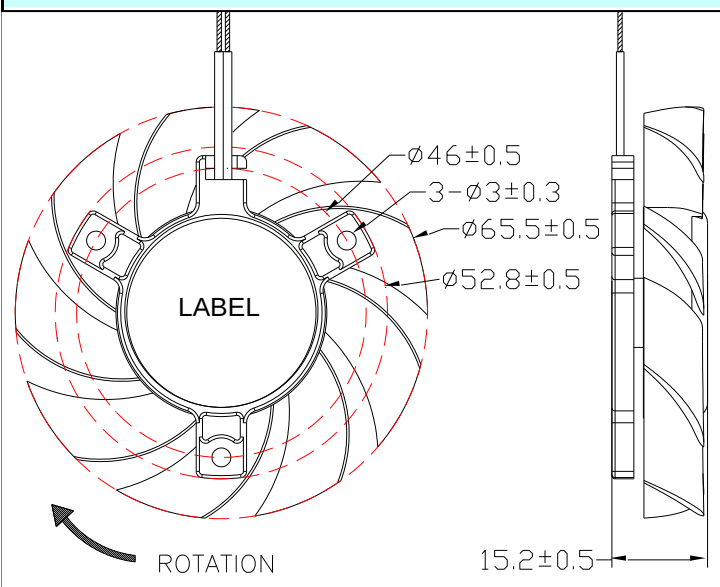

T7015孔距有46mm及45mm

AIR FLOW-AIR PRESSURE(PERFORMANCE CURVES)

AIR PRESSURE(mmH₂O)

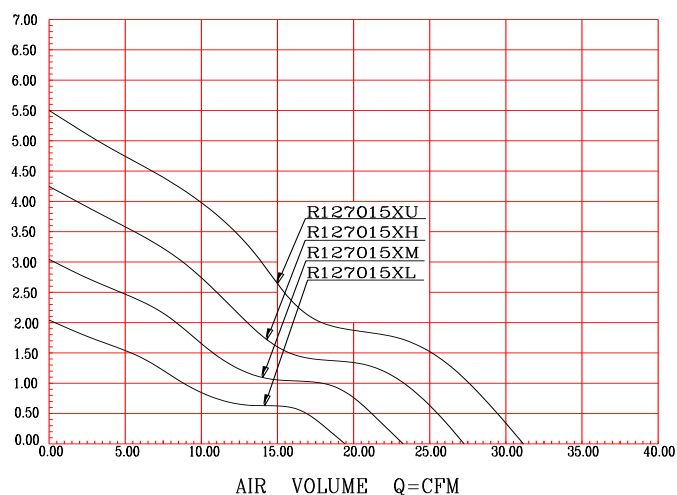

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
T127015BL	12	7~13.2	0.12	1.44	3000	19.46	0.55	2.15	27
T127015BM	12	7~13.2	0.15	1.80	3600	23.35	0.66	3.09	31.6
T127015BH	12	7~13.2	0.25	3.00	4200	27.24	0.77	4.21	36.5
T127015BU	12	7~13.2	0.30	3.60	4800	31.13	0.88	5.50	41
T127015SL	12	7~13.2	0.12	1.44	3000	19.46	0.55	2.15	27
T127015SM	12	7~13.2	0.15	1.80	3600	23.35	0.66	3.09	31.6
T127015SH	12	7~13.2	0.25	3.00	4200	27.24	0.77	4.21	36.5
T127015SU	12	7~13.2	0.30	3.60	4800	31.13	0.88	5.50	41

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

70×70×15MM SERIES (fifth)

Bearing Type: Two ball bearing
EBR

Rated Voltage: 12V/24V


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance


Operating Temp : ~10~70℃

Weight : 42g

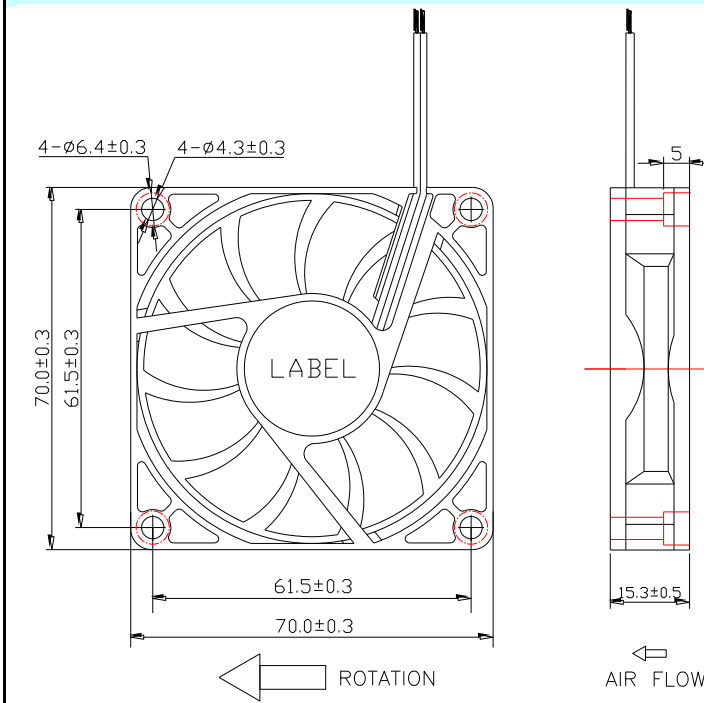

AIR FLOW-AIR PRESSURE(PERFORMANCE CURVES)

AIR PRESSURE(mmH₂O)

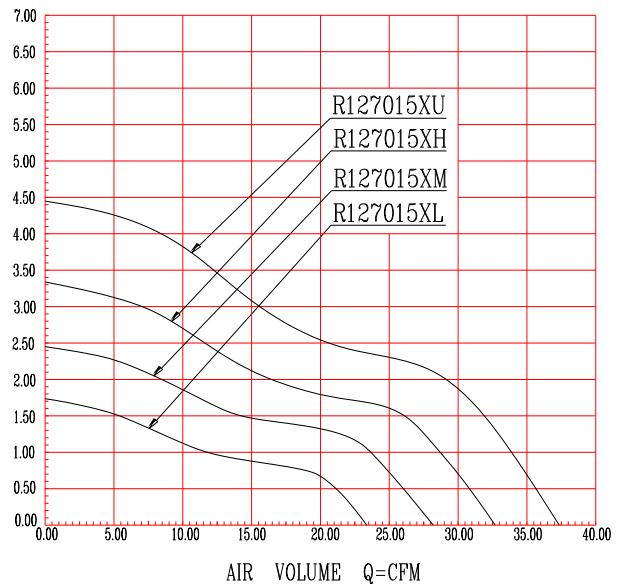

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
R127015BL	12	7~13.2	0.25	3.00	3000	23.41	0.66	1.72	28.2
R127015BM	12	7~13.2	0.28	3.36	3600	28.10	0.80	2.48	31.9
R127015BH	12	7~13.2	0.30	3.60	4200	32.78	0.93	3.38	36
R127015BU	12	7~13.2	0.35	4.20	4800	37.46	1.06	4.41	38.9
R127015SL	12	7~13.2	0.25	3.00	3000	23.41	0.66	1.72	28.2
R127015SM	12	7~13.2	0.28	3.36	3600	28.10	0.80	2.48	31.9
R127015SH	12	7~13.2	0.30	3.60	4200	32.78	0.93	3.38	36
R127015SU	12	7~13.2	0.35	4.20	4800	37.46	1.06	4.41	38.9

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

70×70×15MM SERIES (SIXTH)

Bearing Type: Two ball bearing

EBR

Rated Voltage 12V/24V


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)


Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 42g

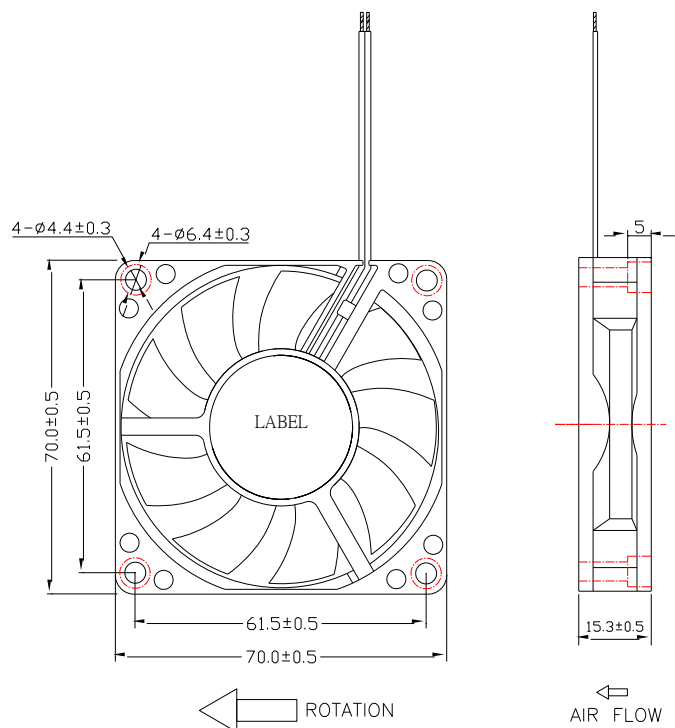

AIR FLOW-AIR PRESSURE(PERFORMANCE CURVES)
AIR PRESSURE(mmH₂O)

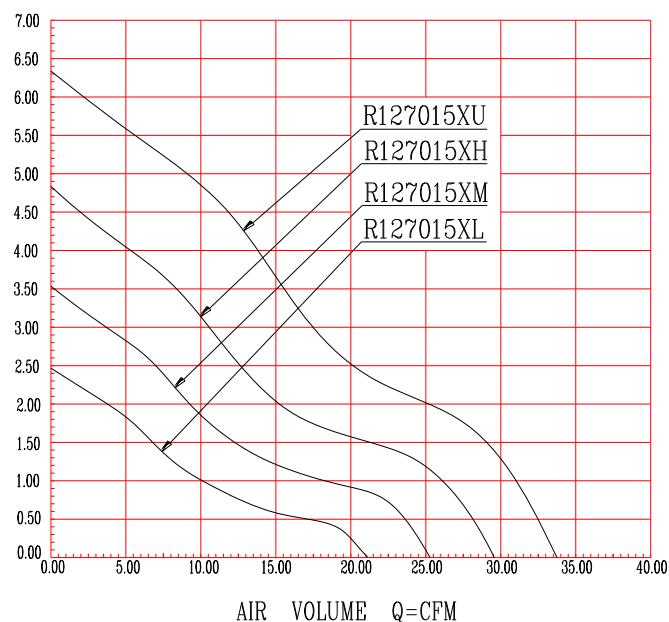

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
R127015BL	12	7~13.2	0.12	1.44	3000	21.13	0.60	2.49	29.1
R127015BM	12	7~13.2	0.15	1.80	3600	25.36	0.72	3.59	32.8
R127015BH	12	7~13.2	0.25	3.00	4200	29.59	0.84	4.88	37
R127015BU	12	7~13.2	0.30	3.60	4800	33.82	0.96	6.38	42.4
R127015SL	12	7~13.2	0.12	1.44	3000	21.13	0.60	2.49	29.1
R127015SM	12	7~13.2	0.15	1.80	3600	25.36	0.72	3.59	32.8
R127015SH	12	7~13.2	0.25	3.00	4200	29.59	0.84	4.88	37
R127015SU	12	7~13.2	0.30	3.60	4800	33.82	0.96	6.38	42.4

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

70×70×15MM SERIES (seventh)

Bearing Type: Two ball bearing

EBR

Rated Voltage 12V/24V


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance


Operating Temp : ~10~70℃

Weight : 42g

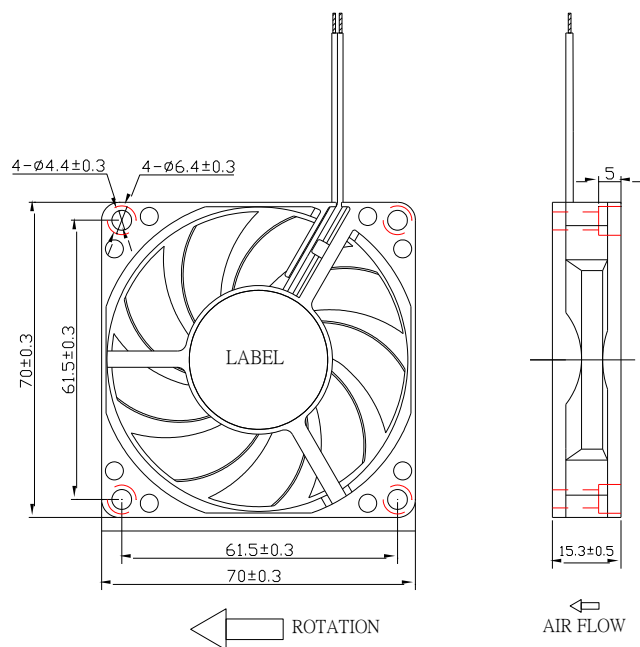

AIR FLOW-AIR PRESSURE(PERFORMANCE CURVES)

AIR PRESSURE(mmH₂O)

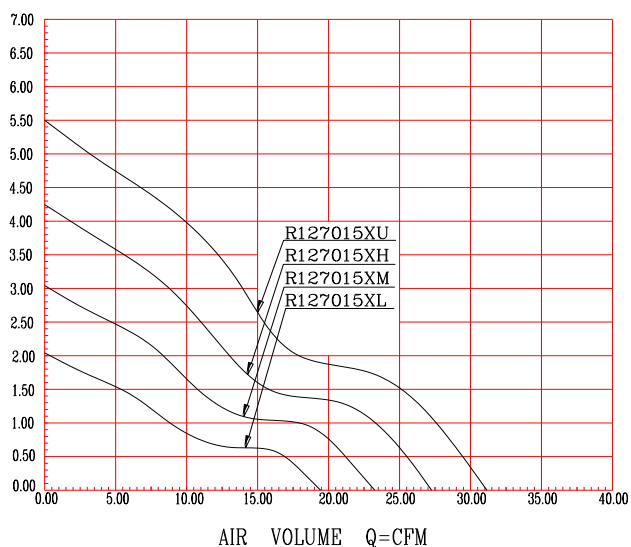

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
R127015BL	12	7~13.2	0.12	1.44	3000	19.46	0.55	2.15	27
R127015BM	12	7~13.2	0.15	1.80	3600	23.35	0.66	3.09	31.6
R127015BH	12	7~13.2	0.25	3.00	4200	27.24	0.77	4.21	36.5
R127015BU	12	7~13.2	0.30	3.60	4800	31.13	0.88	5.50	41
R127015SL	12	7~13.2	0.12	1.44	3000	19.46	0.55	2.15	27
R127015SM	12	7~13.2	0.15	1.80	3600	23.35	0.66	3.09	31.6
R127015SH	12	7~13.2	0.25	3.00	4200	27.24	0.77	4.21	36.5
R127015SU	12	7~13.2	0.30	3.60	4800	31.13	0.88	5.50	41

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

70×70×15MM SERIES

Bearing Type: Two ball bearing

Rated Voltage 12V/24V


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance


Operating Temp : ~10~70℃

Weight : 42g

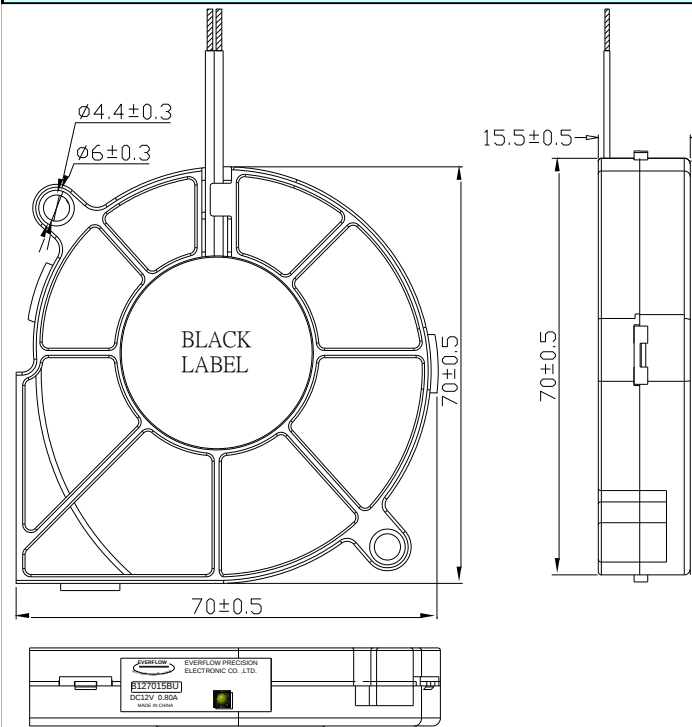

AIR FLOW-AIR PRESSURE (PERFORMANCE CURVES)

AIR PRESSURE(mmH₂O)

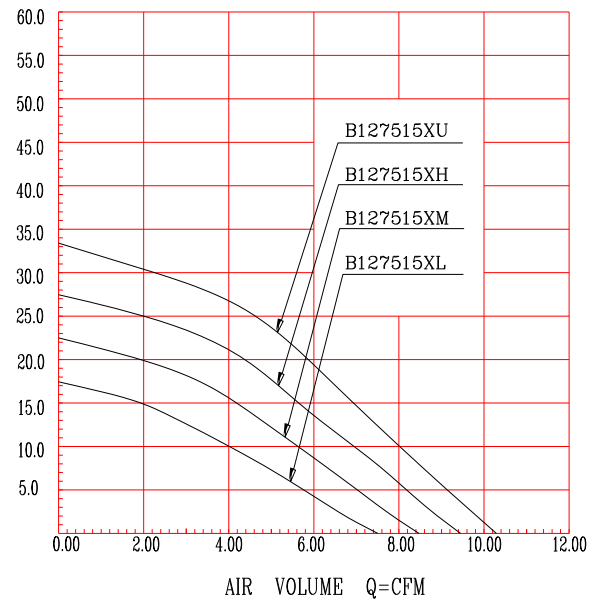

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
B127015BL	12	7~13.2	0.35	4.20	3600	6.91	0.20	13.78	43.0
B127015BM	12	7~13.2	0.45	5.40	4200	8.07	0.23	18.75	45.2
B127015BH	12	7~13.2	0.60	7.20	4800	9.22	0.26	24.49	48.6
B127015BU	12	7~13.2	0.80	9.60	5400	10.37	0.29	31.00	52.30

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

70×70×20MM SERIES

Bearing Type: Two ball bearing
EBR

Rated Voltage 12V/24V


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance


Operating Temp : ~10~70℃

Weight : 58g

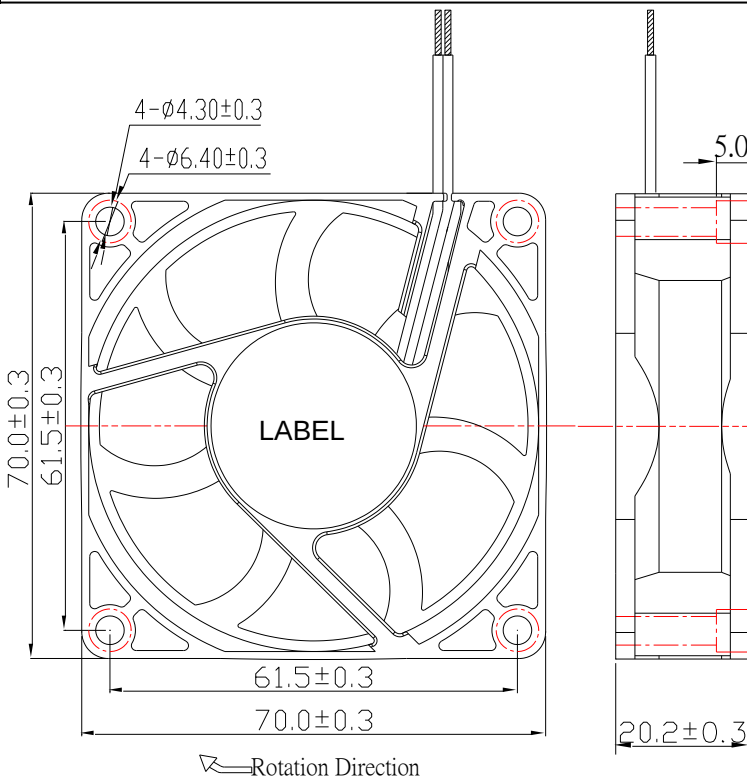

AIR FLOW-AIR PRESSURE(PERFORMANCE CURVES)

AIR PRESSURE(mmH₂O)

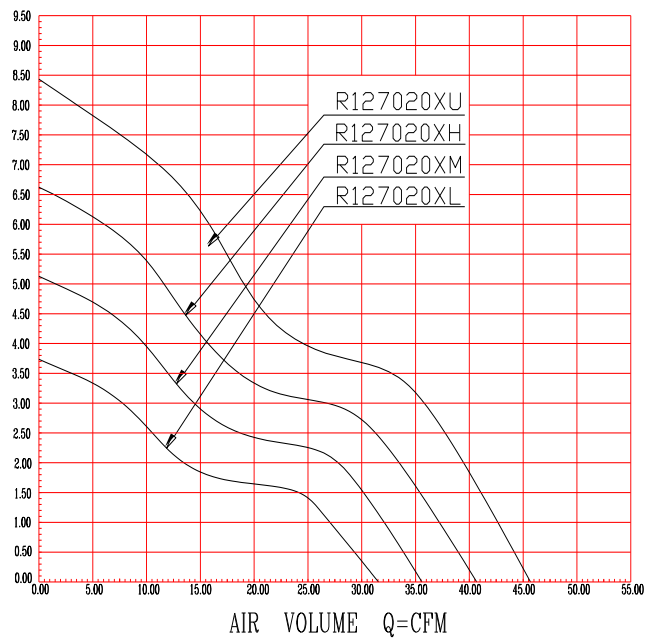

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
R127020BL	12	7~13.2	0.20	2.40	3600	30.51	0.86	3.76	33.3
R127020BM	12	7~13.2	0.26	3.12	4200	35.59	1.01	5.12	37
R127020BH	12	7~13.2	0.30	3.60	4800	40.67	1.15	6.69	40.7
R127020BU	12	7~13.2	0.40	4.80	5400	45.76	1.30	8.47	43.3
R127020SL	12	7~13.2	0.20	2.40	3600	30.51	0.86	3.76	33.3
R127020SM	12	7~13.2	0.26	3.12	4200	35.59	1.01	5.12	37
R127020SH	12	7~13.2	0.30	3.60	4800	40.67	1.15	6.69	40.7
R127020SU	12	7~13.2	0.40	4.80	5400	45.76	1.30	8.47	43.3

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

70×70×25MM SERIES

Bearing Type: Two ball bearing

EBR

Rated Voltage 12V/24V


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance


Operating Temp : ~10~70℃

Weight : 53g

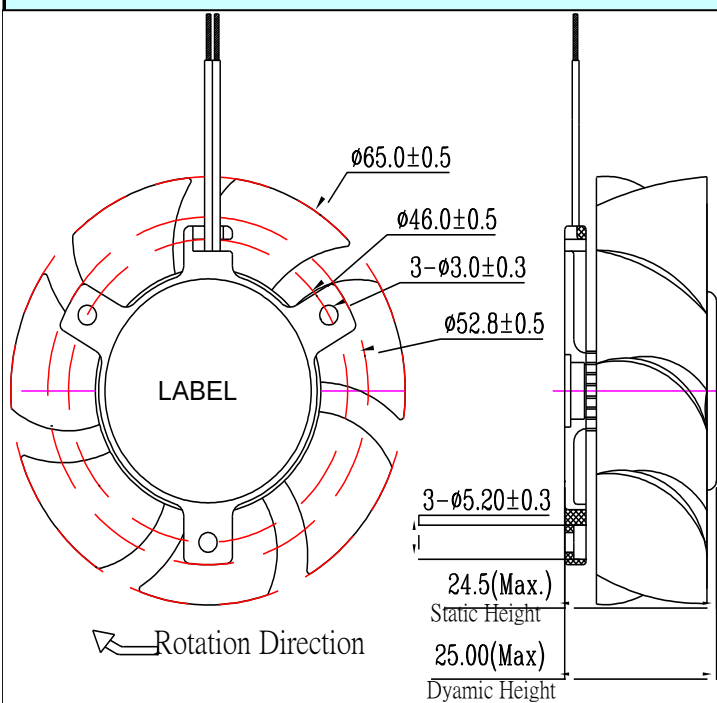

AIR FLOW-AIR PRESSURE (PERFORMANCE CURVES)

AIR PRESSURE(mmH₂O)

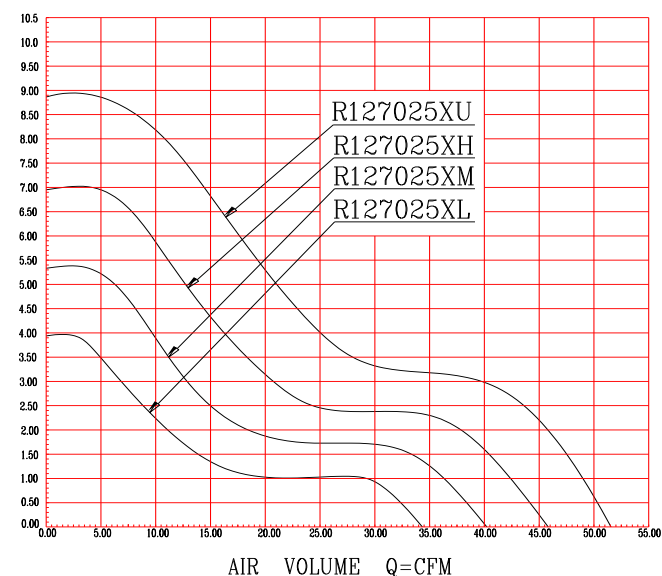

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
R127025BL	12	7~13.2	0.15	1.80	3600	34.39	0.97	3.91	33.5
R127025BM	12	7~13.2	0.25	3.00	4200	40.13	1.14	5.32	35.3
R127025BH	12	7~13.2	0.30	3.60	4800	45.86	1.30	6.95	40
R127025BU	12	7~13.2	0.40	4.80	5400	51.59	1.46	8.80	43.8
R127025SL	12	7~13.2	0.15	1.80	3600	34.39	0.97	3.91	33.5
R127025SM	12	7~13.2	0.25	3.00	4200	40.13	1.14	5.32	35.3
R127025SH	12	7~13.2	0.30	3.60	4800	45.86	1.30	6.95	40
R127025SU	12	7~13.2	0.40	4.80	5400	51.59	1.46	8.80	43.8

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

70×70×25MM SERIES

Bearing Type: Two ball bearing

EBR

Rated Voltage 12V/24V


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance


Operating Temp : ~10~70°C

Weight : 70g

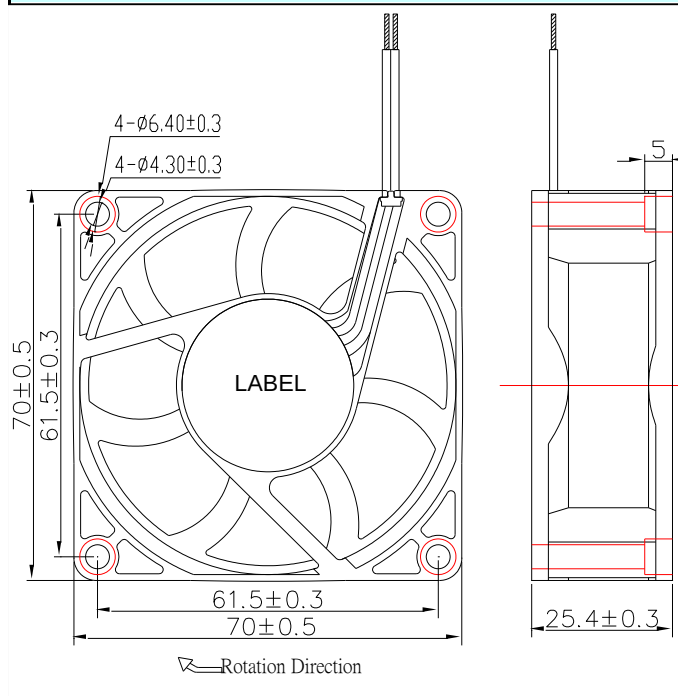

AIR FLOW-AIR PRESSURE (PERFORMANCE CURVES)

AIR PRESSURE(mmH₂O)

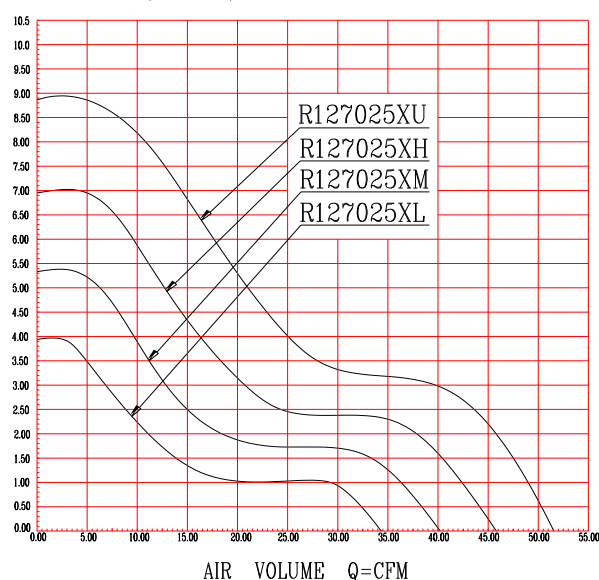

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
R127025BL	12	7~13.2	0.15	1.80	3600	34.39	0.97	3.91	33.5
R127025BM	12	7~13.2	0.25	3.00	4200	40.13	1.14	5.32	35.3
R127025BH	12	7~13.2	0.30	3.60	4800	45.86	1.30	6.95	40
R127025BU	12	7~13.2	0.40	4.80	5400	51.59	1.46	8.80	43.8
R127025SL	12	7~13.2	0.15	1.80	3600	34.39	0.97	3.91	33.5
R127025SM	12	7~13.2	0.25	3.00	4200	40.13	1.14	5.32	35.3
R127025SH	12	7~13.2	0.30	3.60	4800	45.86	1.30	6.95	40
R127025SU	12	7~13.2	0.40	4.80	5400	51.59	1.46	8.80	43.8

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

70×70×25MM SERIES

Bearing Type: Two ball bearing
EBR

Rated Voltage: 12V/24V


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance


Operating Temp : ~10~70℃

Weight : 70g

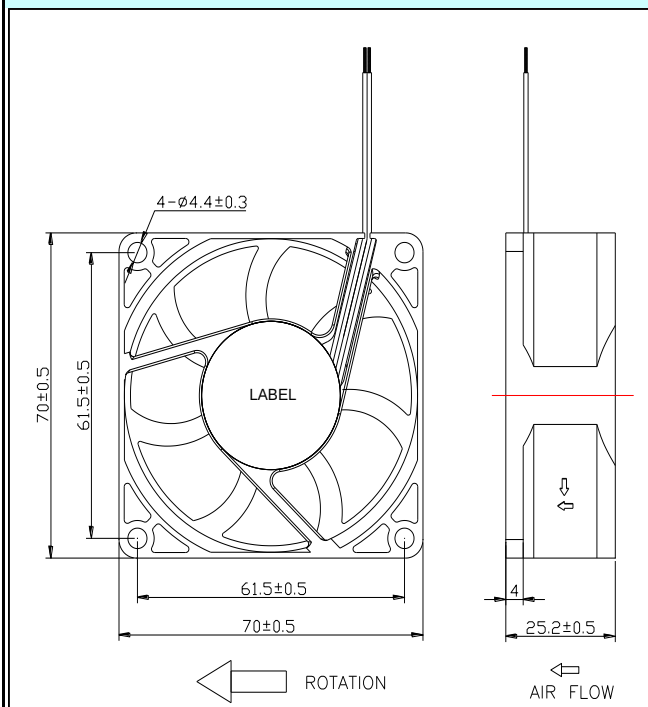

AIR FLOW-AIR PRESSURE (PERFORMANCE CURVES)

AIR PRESSURE(mmH₂O)

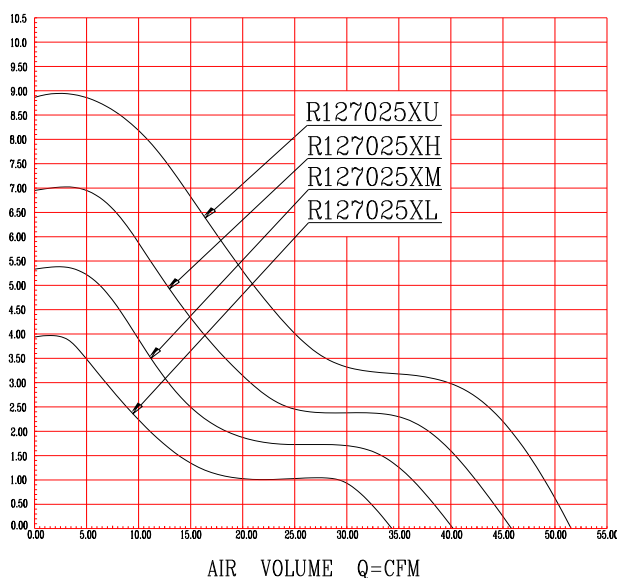

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
R127025BL	12	7~13.2	0.15	1.80	3600	34.39	0.97	3.91	33.5
R127025BM	12	7~13.2	0.25	3.00	4200	40.13	1.14	5.32	35.3
R127025BH	12	7~13.2	0.30	3.60	4800	45.86	1.30	6.95	40
R127025BU	12	7~13.2	0.40	4.80	5400	51.59	1.46	8.80	43.8
R127025SL	12	7~13.2	0.15	1.80	3600	34.39	0.97	3.91	33.5
R127025SM	12	7~13.2	0.25	3.00	4200	40.13	1.14	5.32	35.3
R127025SH	12	7~13.2	0.30	3.60	4800	45.86	1.30	6.95	40
R127025SU	12	7~13.2	0.40	4.80	5400	51.59	1.46	8.80	43.8

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

70×70×38MM SERIES

Bearing Type: Two ball bearing

Rated Voltage: 12V/24V


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance


Operating Temp : ~10~70°C

Weight : 70g

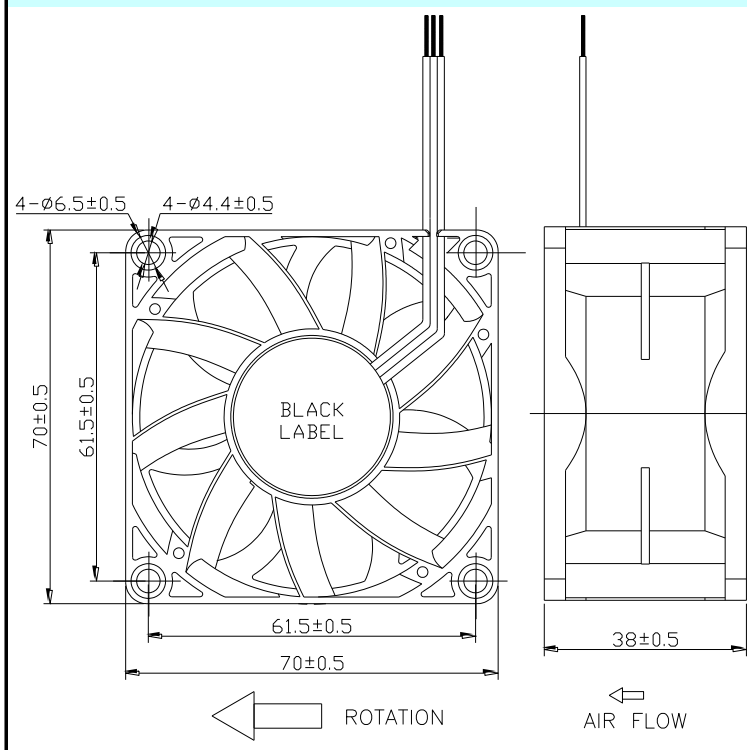

AIR PRESURE-AIR FLOW (PERFORMANCE CURVES)

AIR PRESSURE(mmH₂O)

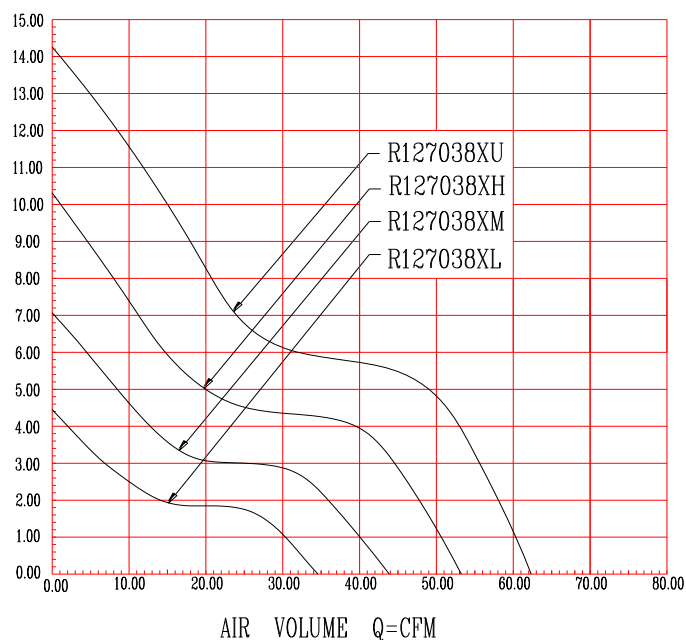

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
R127038BL	12	7~13.2	0.28	3.36	3800	34.83	0.99	4.44	35.8
R127038BM	12	7~13.2	0.35	4.20	4800	43.99	1.25	7.09	45
R127038BH	12	7~13.2	0.50	6.00	5800	53.16	1.51	10.35	47.3
R127038BU	12	7~13.2	0.80	9.60	6800	62.32	1.77	14.22	51

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

75×75×15MM SERIES

Bearing Type: Two ball bearing

Rated Voltage: 12V/24V


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)


Protection : Auto-Restart /Impedance

Operating Temp : ~10~70℃

Weight : 85g

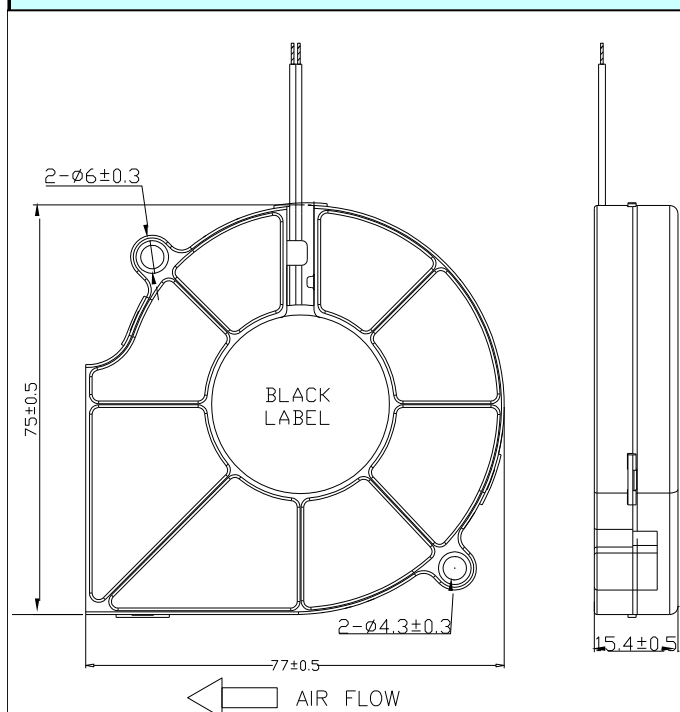

AIR FLOW-AIR PRESSURE (PERFORMANCE CURVES)

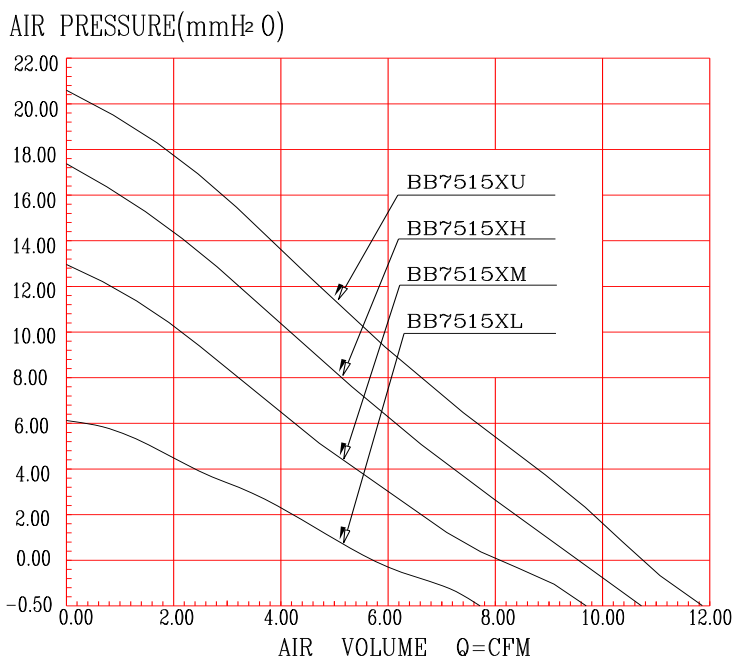

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
B127515BL	12	7~13.2	0.40	4.80	4000	7.55	0.21	17.61	42.7
B127515BM	12	7~13.2	0.50	6.00	4500	8.49	0.24	22.29	47
B127515BH	12	7~13.2	0.60	7.20	5000	9.44	0.27	27.52	49
B127515BU	12	7~13.2	0.80	9.60	5500	10.38	0.29	33.30	51

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

75×75×30MM SERIES

Bearing Type: Two ball bearing

Rated Voltage: 12V/24V


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance


Operating Temp : ~10~70℃

Weight : 85g

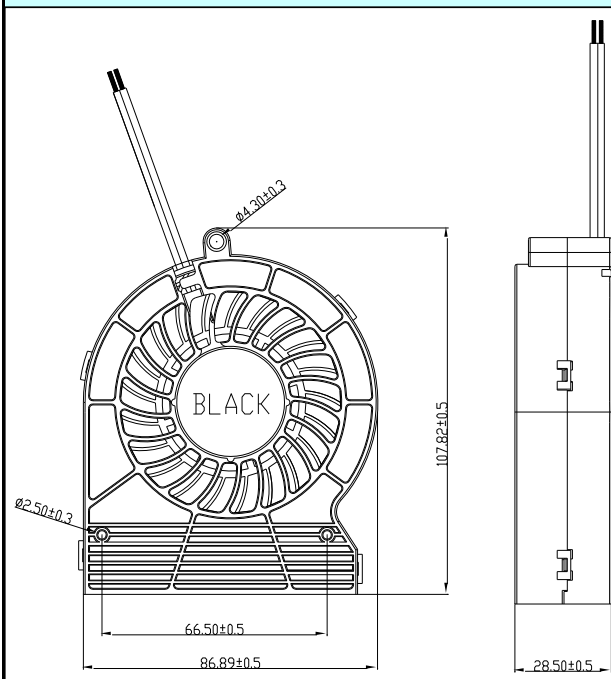

AIR FLOW-AIR PRESSURE (PERFORMANCE CURVES)

AIR PRESSURE(mmH₂O)

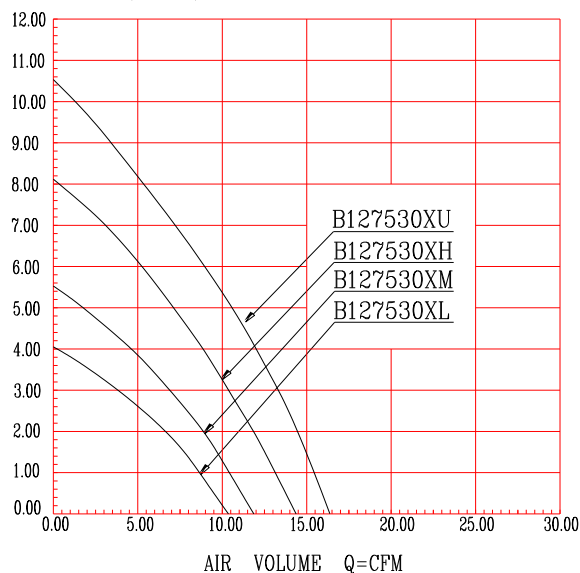

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
B127530BL	12	7~13.2	0.18	2.16	2050	10.22	0.29	4.08	35.5
B127530BM	12	7~13.2	0.20	2.40	2400	11.97	0.34	5.59	38
B127530BH	12	7~13.2	0.30	3.60	2900	14.46	0.41	8.16	45
B127530BU	12	7~13.2	0.42	5.04	3300	16.45	0.47	10.57	48
B127530BL	12	7~13.2	0.18	2.16	2050	10.22	0.29	4.08	35.5
B127530BM	12	7~13.2	0.20	2.40	2400	11.97	0.34	5.59	38
B127530BH	12	7~13.2	0.30	3.60	2900	14.46	0.41	8.16	45
B127530BU	12	7~13.2	0.42	5.04	3300	16.45	0.47	10.57	48

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

75×75×30MM SERIES

Bearing Type: Two ball bearing

Rated Voltage: 12V/24V



Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)


Protection : Auto-Restart /Impedance

Operating Temp : ~10~70℃

Weight : 85g

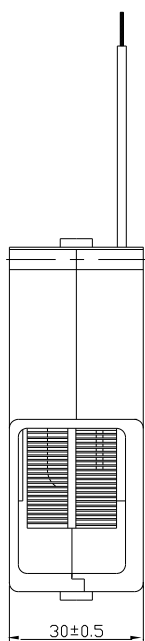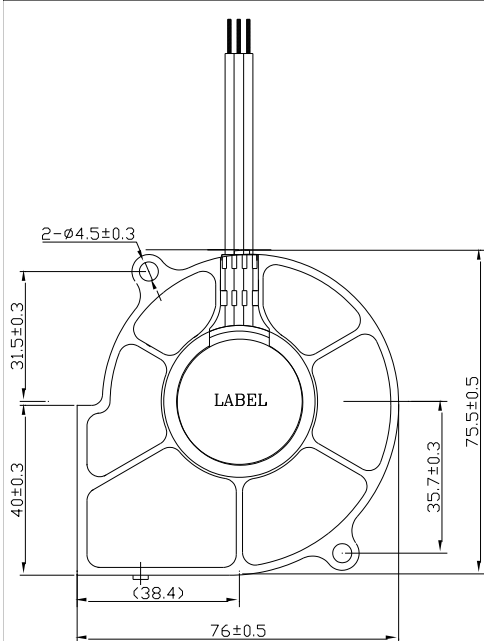

AIR FLOW-AIR PRESSURE (PERFORMANCE CURVES)
AIR PRESSURE(mmH₂O)

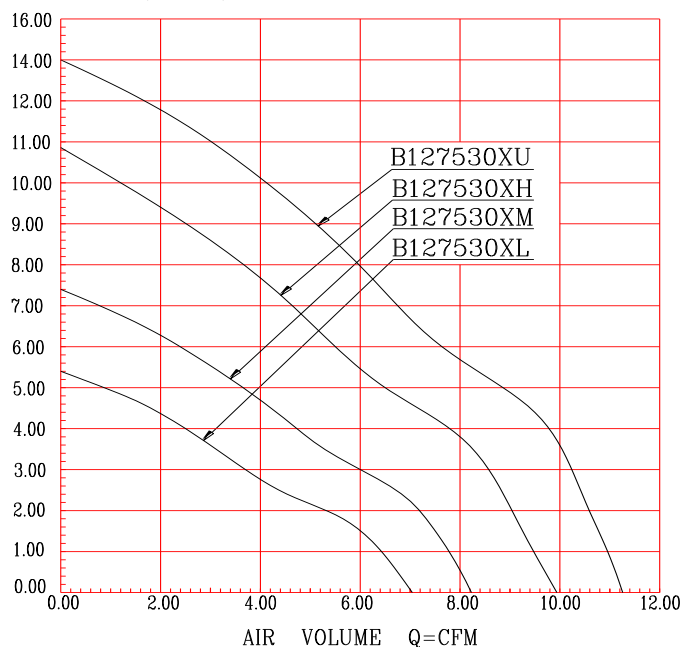

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
B127530BL	12	7~13.2	0.18	2.16	2050	7.01	0.20	5.40	26.7
B127530BM	12	7~13.2	0.20	2.40	2400	8.21	0.23	7.40	31.5
B127530BH	12	7~13.2	0.30	3.60	2900	9.92	0.28	10.81	35.6
B127530BU	12	7~13.2	0.42	5.04	3300	11.29	0.32	14.00	38.7

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

80×80×10MM SERIES

Bearing Type: Two ball bearing
EBR

Rated Voltage: 5V/12V


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)


Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 32g

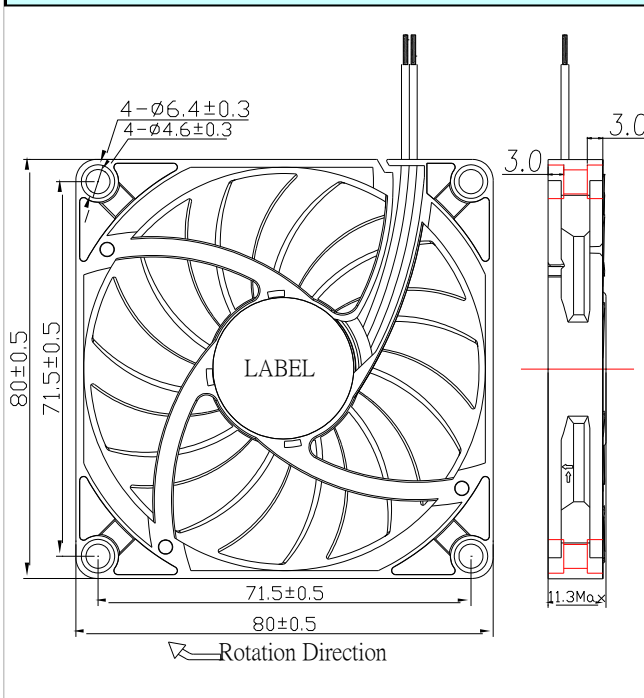

AIR FLOW-AIR PRESSURE(PERFORMANCE CURVES)
AIR PRESSURE(mmH₂O)

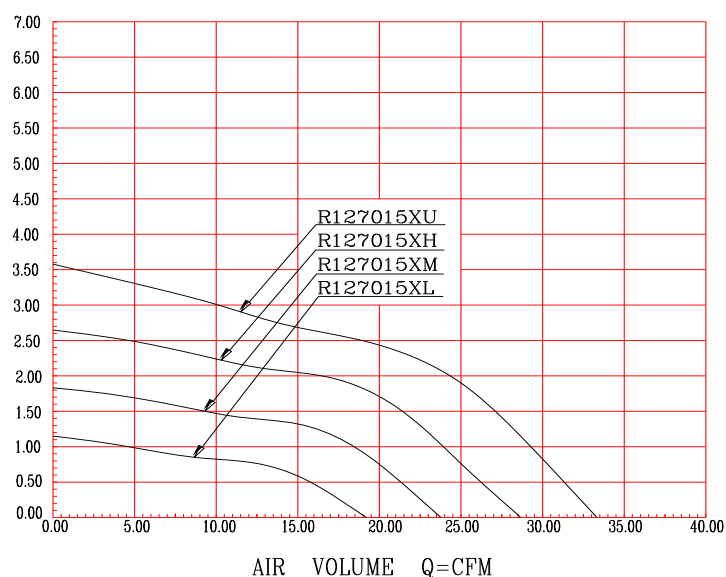

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
R128010BL	12	7~13.2	0.15	1.8	2400	19.12	0.54	1.17	24
R128010BM	12	7~13.2	0.20	2.40	3000	23.90	0.68	1.83	27.7
R128010BH	12	7~13.2	0.25	3.00	3600	28.68	0.81	2.63	31.8
R128010BU	12	7~13.2	0.35	4.20	4200	33.46	0.95	3.58	36.5
R128010SL	12	7~13.2	0.15	1.8	2400	19.12	0.54	1.17	24
R128010SM	12	7~13.2	0.20	2.40	3000	23.90	0.68	1.83	27.7
R128010SH	12	7~13.2	0.25	3.00	3600	28.68	0.81	2.63	31.8
R128010SU	12	7~13.2	0.35	4.20	4200	33.46	0.95	3.58	36.5

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

80×80×10MM SERIES

Bearing Type: Two ball bearing
EBR

Rated Voltage: 5V/12V


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)


Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 24g

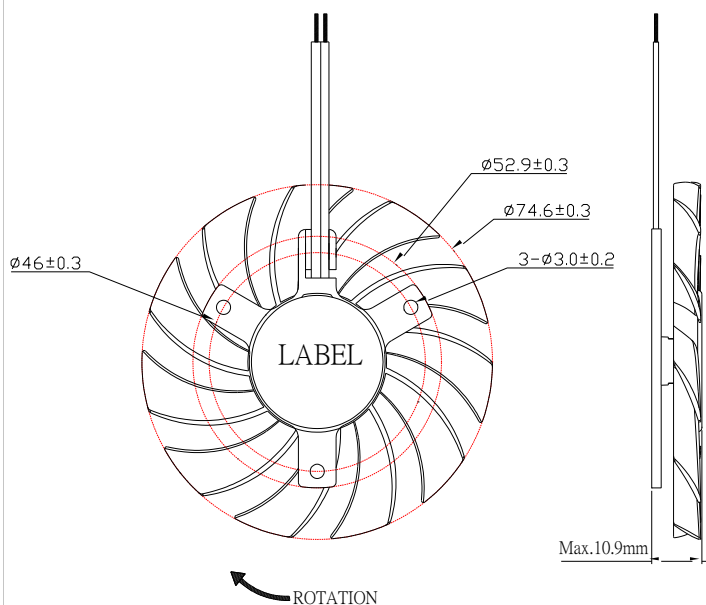

AIR FLOW-AIR PRESSURE(PERFORMANCE CURVES)
AIR PRESSURE(mmH₂O)

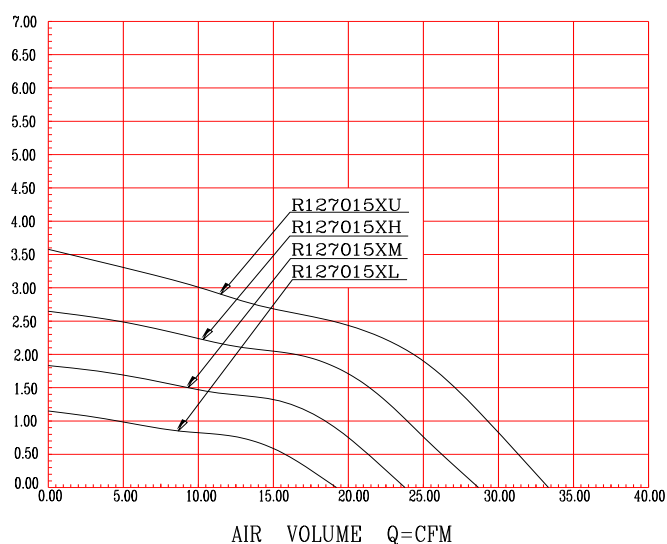

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
R128010BL	12	7~13.2	0.15	1.8	2400	19.12	0.54	1.17	24
R128010BM	12	7~13.2	0.20	2.40	3000	23.90	0.68	1.83	27.7
R128010BH	12	7~13.2	0.25	3.00	3600	28.68	0.81	2.63	31.8
R128010BU	12	7~13.2	0.35	4.20	4200	33.46	0.95	3.58	36.5
R128010SL	12	7~13.2	0.15	1.8	2400	19.12	0.54	1.17	24
R128010SM	12	7~13.2	0.20	2.40	3000	23.90	0.68	1.83	27.7
R128010SH	12	7~13.2	0.25	3.00	3600	28.68	0.81	2.63	31.8
R128010SU	12	7~13.2	0.35	4.20	4200	33.46	0.95	3.58	36.5

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

80×80×15MM SERIES

Bearing Type: Two ball bearing
EBR

Rated Voltage: 12V/24V


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)


Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 34g

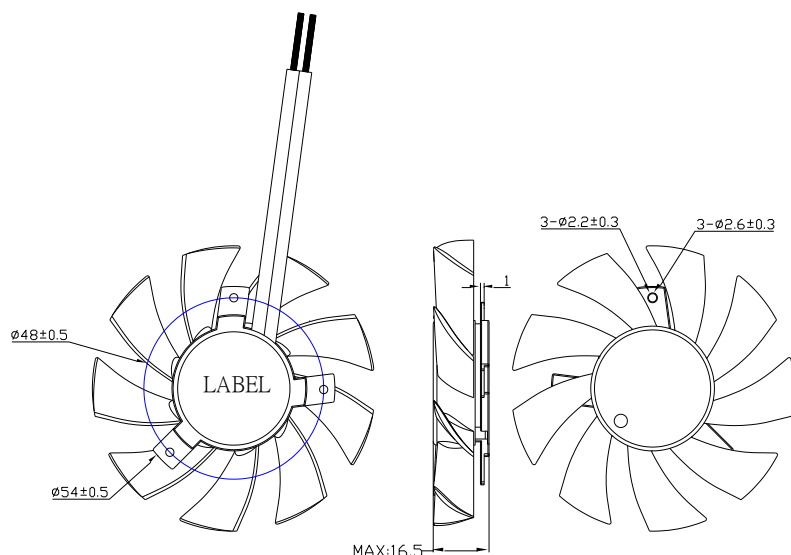

AIR FLOW-AIR PRESSURE(PERFORMANCE CURVES)
AIR PRESSURE(mmH₂O)

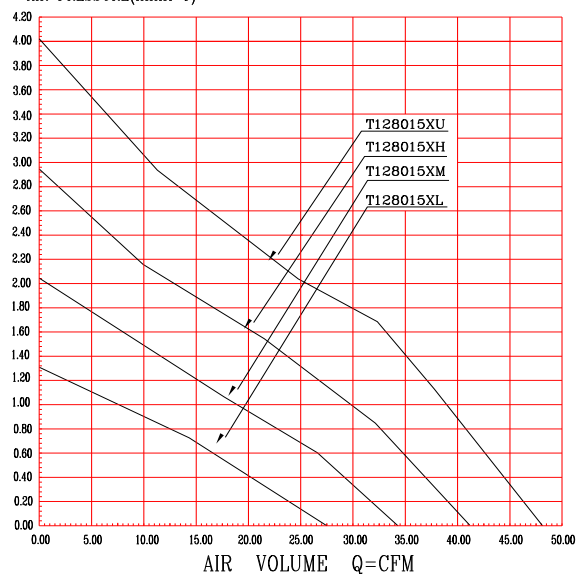

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
T128015BL	12	7~13.2	0.19	2.28	2400	27.50	0.78	1.31	27.5
T128015BM	12	7~13.2	0.25	3.00	3000	34.38	0.97	2.05	32
T128015BH	12	7~13.2	0.32	3.84	3600	41.26	1.17	2.95	36
T128015BU	12	7~13.2	0.50	6.00	4200	48.14	1.36	4.02	40
T128015SL	12	7~13.2	0.19	2.28	2400	27.50	0.78	1.31	27.5
T128015SM	12	7~13.2	0.25	3.00	3000	34.38	0.97	2.05	32
T128015SH	12	7~13.2	0.32	3.84	3600	41.26	1.17	2.95	36
T128015SU	12	7~13.2	0.50	6.00	4200	48.14	1.36	4.02	40

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

80×80×15MM SERIES

Bearing Type: Two ball bearing
EBR

Rated Voltage: 12V/24V


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)


Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 34g

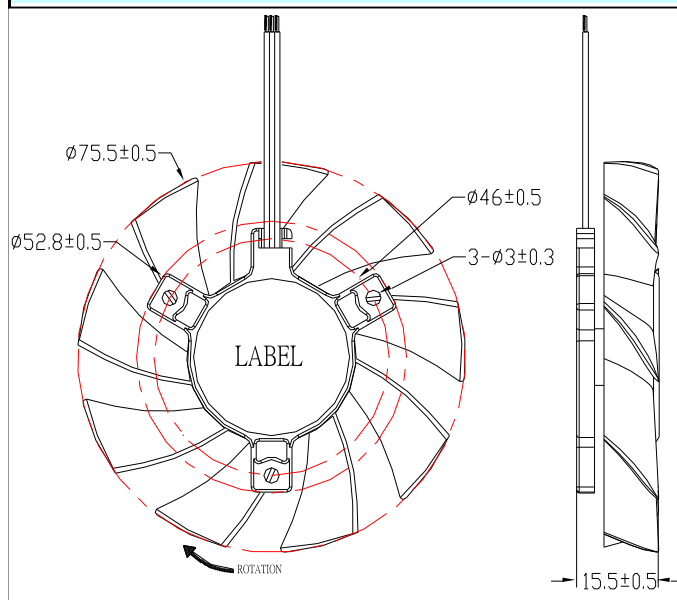

AIR FLOW-AIR PRESSURE(PERFORMANCE CURVES)
AIR PRESSURE(mmH₂O)

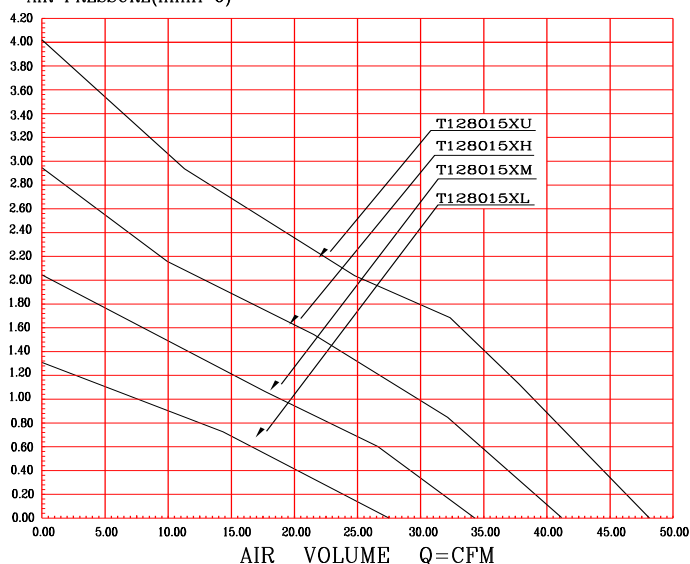

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
T128015BL	12	7~13.2	0.19	2.28	2400	27.50	0.78	1.31	27.5
T128015BM	12	7~13.2	0.25	3.00	3000	34.38	0.97	2.05	32
T128015BH	12	7~13.2	0.32	3.84	3600	41.26	1.17	2.95	36
T128015BU	12	7~13.2	0.50	6.00	4200	48.14	1.36	4.02	40
T128015SL	12	7~13.2	0.19	2.28	2400	27.50	0.78	1.31	27.5
T128015SM	12	7~13.2	0.25	3.00	3000	34.38	0.97	2.05	32
T128015SH	12	7~13.2	0.32	3.84	3600	41.26	1.17	2.95	36
T128015SU	12	7~13.2	0.50	6.00	4200	48.14	1.36	4.02	40

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

80×80×15MM SERIES

Bearing Type: Two ball bearing
EBR

Rated Voltage: 12V/24V


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)


Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 56g

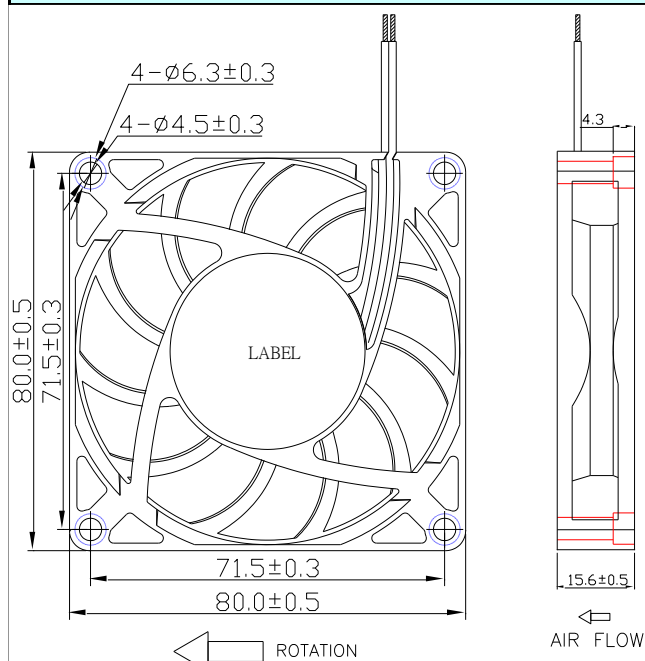

AIR PRESSURE-AIR FLOW (PERFORMANCE CURVES)
AIR PRESSURE(mmH₂O)

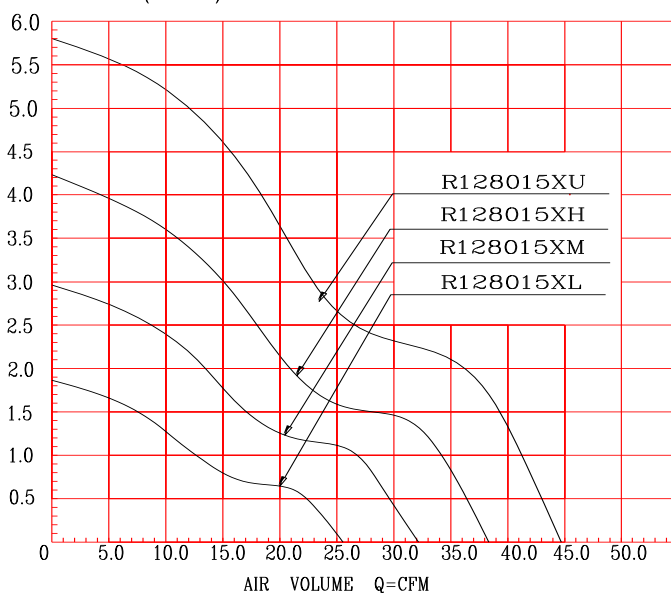

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
R128015BL	12	7~13.2	0.19	2.28	2400	25.62	0.73	1.89	25.5
R128015BM	12	7~13.2	0.25	3.00	3000	32.02	0.91	2.96	31.7
R128015BH	12	7~13.2	0.32	3.84	3600	38.43	1.09	4.26	36.3
R128015BU	12	7~13.2	0.50	2.28	4200	44.83	1.27	5.80	40
R128015SL	12	7~13.2	0.19	3.00	2400	25.62	0.73	1.89	25.5
R128015SM	12	7~13.2	0.25	3.84	3000	32.02	0.91	2.96	31.7
R128015SH	12	7~13.2	0.32	2.28	3600	38.43	1.09	4.26	36.3
R128015SU	12	7~13.2	0.50	3.00	4200	44.83	1.27	5.80	40

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

80×80×15MM SERIES

Bearing Type: Two ball bearing
EBR

Rated Voltage: 12V/24V


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)


Protection : Auto-Restart /Impedance

Operating Temp : ~10~70℃

Weight : 53g

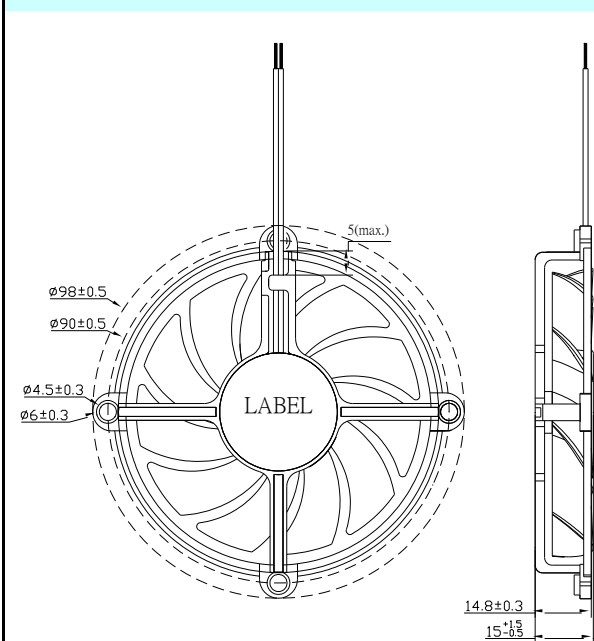

AIR PRESSURE-AIR FLOW (PERFORMANCE CURVES)
AIR PRESSURE(mmH₂O)

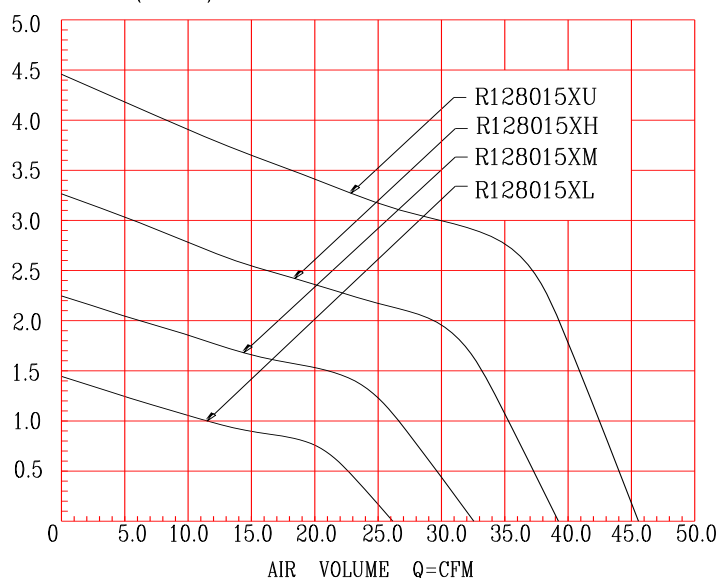

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
R128015BL	12	7~13.2	0.19	2.28	2400	26.09	0.74	1.46	26.6
R128015BM	12	7~13.2	0.25	3.00	3000	32.61	0.92	2.28	31
R128015BH	12	7~13.2	0.32	3.84	3600	39.13	1.11	3.28	36.8
R128015BU	12	7~13.2	0.50	6.00	4200	45.65	1.29	4.47	39.9
R128015SL	12	7~13.2	0.19	2.28	2400	26.09	0.74	1.46	26.6
R128015SM	12	7~13.2	0.25	3.00	3000	32.61	0.92	2.28	31
R128015SH	12	7~13.2	0.32	3.84	3600	39.13	1.11	3.28	36.8
R128015SU	12	7~13.2	0.50	6.00	4200	45.65	1.29	4.47	39.9

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

80×80×15MM SERIES

Bearing Type: Two ball bearing
EBR

Rated Voltage: 12V/24V


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)


Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 53g

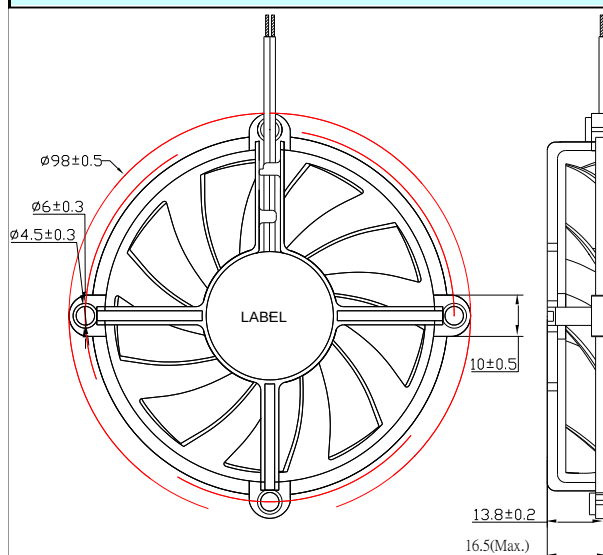

AIR FLOW—AIR PRESSURE (PERFORMANCE CURVES)
AIR PRESSURE(mmH₂O)

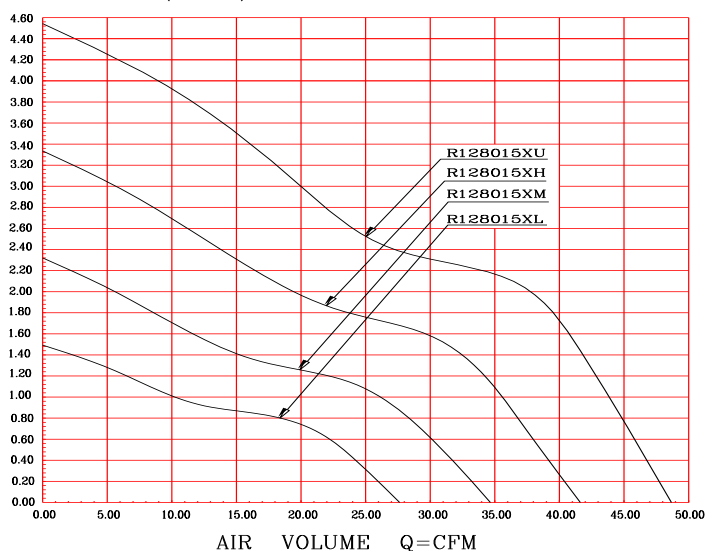

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
R128015BL	12	7~13.2	0.19	2.28	2400	27.89	0.79	1.49	26.30
R128015BM	12	7~13.2	0.25	3.00	3000	34.86	0.99	2.32	32.10
R128015BH	12	7~13.2	0.32	3.84	3600	41.84	1.19	3.34	37.70
R128015BU	12	7~13.2	0.50	6.00	4200	48.81	1.38	4.55	42.00
R128015SL	12	7~13.2	0.19	2.28	2400	27.89	0.79	1.49	26.3
R128015SM	12	7~13.2	0.25	3.00	3000	34.86	0.99	2.32	32.1
R128015SH	12	7~13.2	0.32	3.84	3600	41.84	1.19	3.34	37.7
R128015SU	12	7~13.2	0.50	6.00	4200	48.81	1.38	4.55	42.0

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

80×80×15MM SERIES

Bearing Type: Two ball bearing
EBR

Rated Voltage: 12V/24V


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)


Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 34g

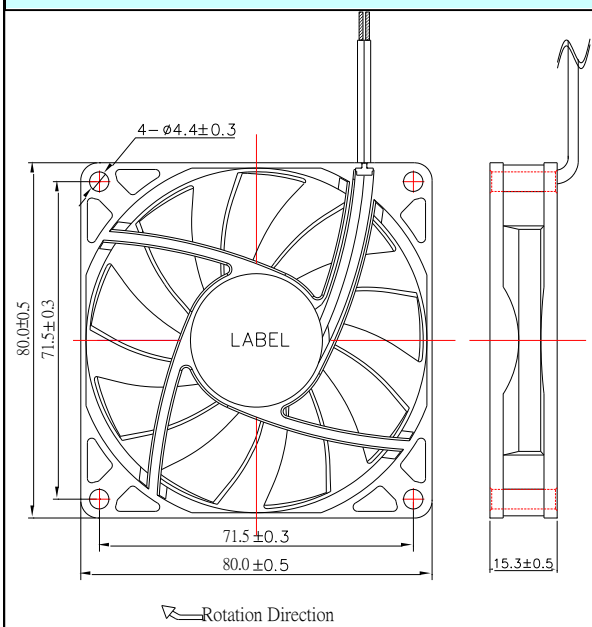

AIR FLOW-AIR PRESSURE(PERFORMANCE CURVES)
AIR PRESSURE(mmH₂O)

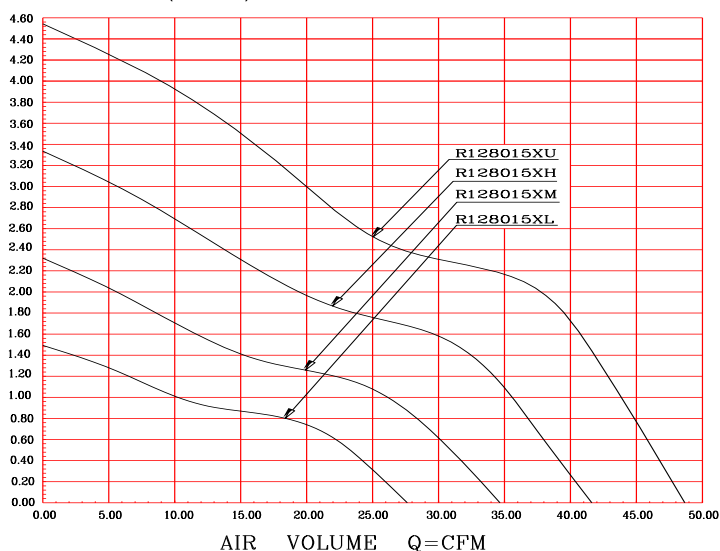

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
R128015BL	12	7~13.2	0.19	2.28	2400	27.89	0.79	1.49	26.30
R128015BM	12	7~13.2	0.25	3.00	3000	34.86	0.99	2.32	32.10
R128015BH	12	7~13.2	0.32	3.84	3600	41.84	1.19	3.34	37.70
R128015BU	12	7~13.2	0.50	6.00	4200	48.81	1.38	4.55	42.00
R128015SL	12	7~13.2	0.19	2.28	2400	27.89	0.79	1.49	26.3
R128015SM	12	7~13.2	0.25	3.00	3000	34.86	0.99	2.32	32.1
R128015SH	12	7~13.2	0.32	3.84	3600	41.84	1.19	3.34	37.7
R128015SU	12	7~13.2	0.50	6.00	4200	48.81	1.38	4.55	42.0

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

80×80×15MM SERIES

Bearing Type: Two ball bearing
EBR

Rated Voltage: 12V/24V


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance


Operating Temp : ~10~70°C

Weight : 56g

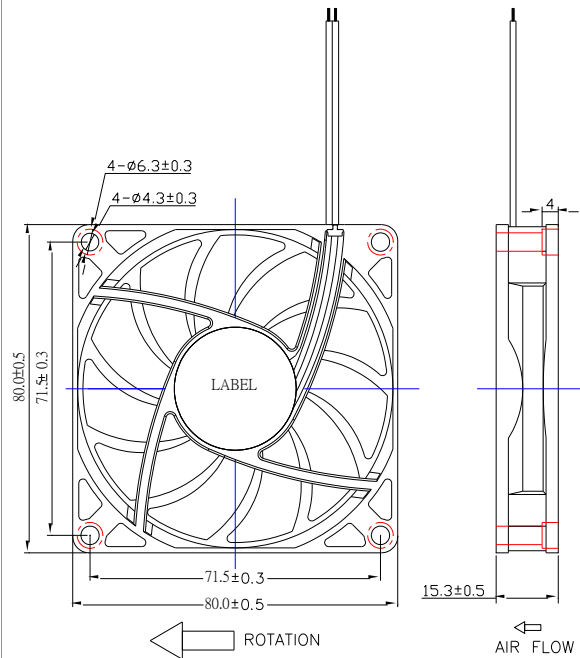

AIR PRESSURE-AIR FLOW (PERFORMANCE CURVES)

AIR PRESSURE(mmH₂O)

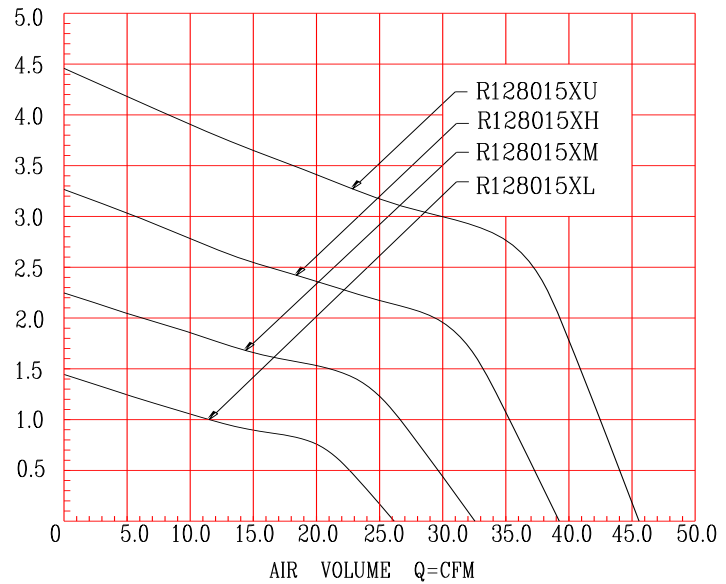

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
R128015BL	12	7~13.2	0.19	2.28	2400	26.09	0.74	1.46	26.6
R128015BM	12	7~13.2	0.25	3.00	3000	32.61	0.92	2.28	31
R128015BH	12	7~13.2	0.32	3.84	3600	39.13	1.11	3.28	36.8
R128015BU	12	7~13.2	0.50	6.00	4200	45.65	1.29	4.47	39.9
R128015SL	12	7~13.2	0.19	2.28	2400	26.09	0.74	1.46	26.6
R128015SM	12	7~13.2	0.25	3.00	3000	32.61	0.92	2.28	31
R128015SH	12	7~13.2	0.32	3.84	3600	39.13	1.11	3.28	36.8
R128015SU	12	7~13.2	0.50	6.00	4200	45.65	1.29	4.47	39.9

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

80×80×18MM SERIES

Bearing Type: Two ball bearing

EBR

Rated Voltage 12V/24V


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance


Operating Temp : ~10~70°C

Weight : 56g

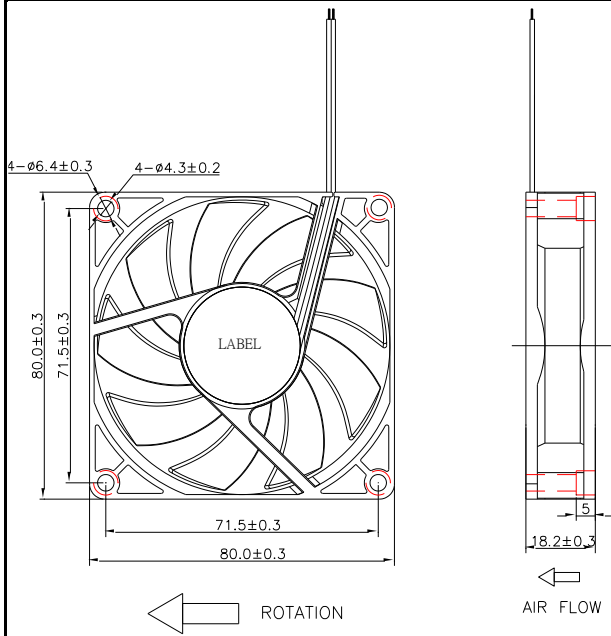

AIR FLOW-AIR PRESSURE (PERFORMANCE CURVES)

STATIC PRESSURE (mmH₂O)

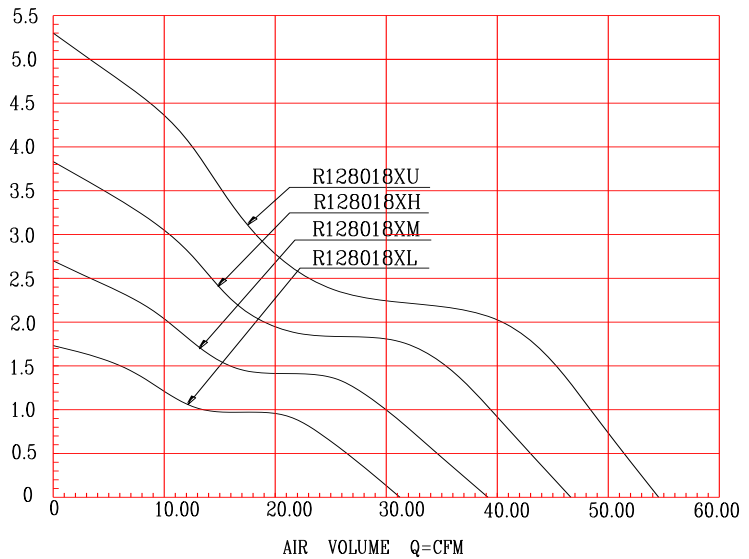

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
R128018BL	12	7~13.2	0.19	2.28	2400	31.22	0.88	1.73	26.9
R128018BM	12	7~13.2	0.25	3.00	3000	39.03	1.11	2.70	32.5
R128018BH	12	7~13.2	0.32	3.84	3600	46.83	1.33	3.89	36.9
R128018BU	12	7~13.2	0.50	6.00	4200	54.64	1.55	5.30	41.2
R128018SL	12	7~13.2	0.19	2.28	2400	31.22	0.88	1.73	26.9
R128018SM	12	7~13.2	0.25	3.00	3000	39.03	1.11	2.70	32.5
R128018SH	12	7~13.2	0.32	3.84	3600	46.83	1.33	3.89	36.9
R128018SU	12	7~13.2	0.50	6.00	4200	54.64	1.55	5.30	41.2

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

80×80×20MM SERIES

Bearing Type: Two ball bearing
EBR

Rated Voltage 12V/24V


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)


Protection : Auto-Restart /Impedance

Operating Temp : ~10~70℃

Weight : 55g

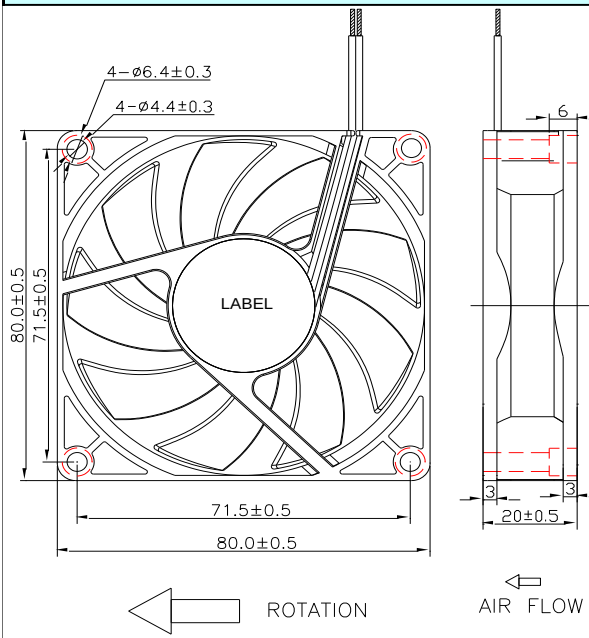

AIR FLOW-AIR PRESSURE (PERFORMANCE CURVES)
STATIC PRESSURE mm/H₂O

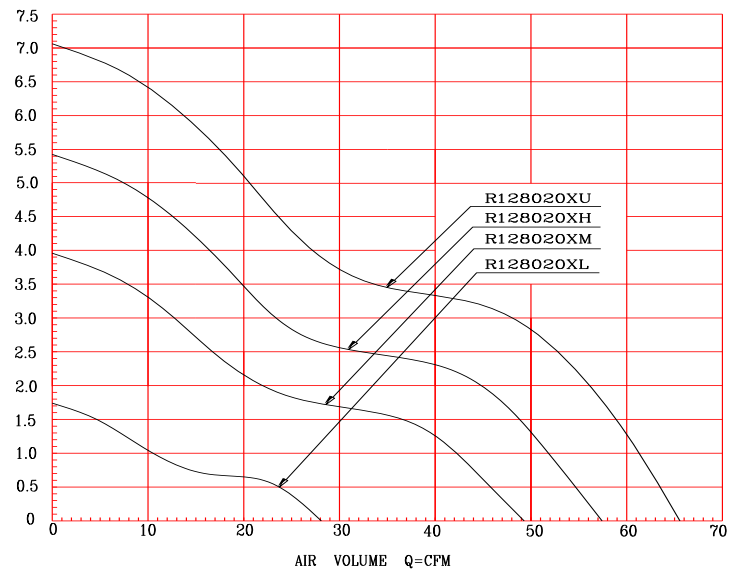

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
R128020BL	12	7~13.2	0.20	2.40	2400	32.75	0.93	1.77	30.6
R128020BM	12	7~13.2	0.40	4.80	3600	49.13	1.39	3.98	39.5
R128020BH	12	7~13.2	0.55	6.60	4200	57.32	1.62	5.41	42.8
R128020BU	12	7~13.2	1.00	12.00	4800	65.51	1.86	7.07	45.7
R128020SL	12	7~13.2	0.20	2.40	2400	32.75	0.93	1.77	30.6
R128020SM	12	7~13.2	0.40	4.80	3600	49.13	1.39	3.98	39.5
R128020SH	12	7~13.2	0.55	6.60	4200	57.32	1.62	5.41	42.8
R128020SU	12	7~13.2	1.00	12.00	4800	65.51	1.86	7.07	45.7

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

80×80×20MM SERIES

Bearing Type: Two ball bearing
EBR

Rated Voltage 12V/24V


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)


Protection : Auto-Restart /Impedance

Operating Temp : ~10~70℃

Weight : 55g

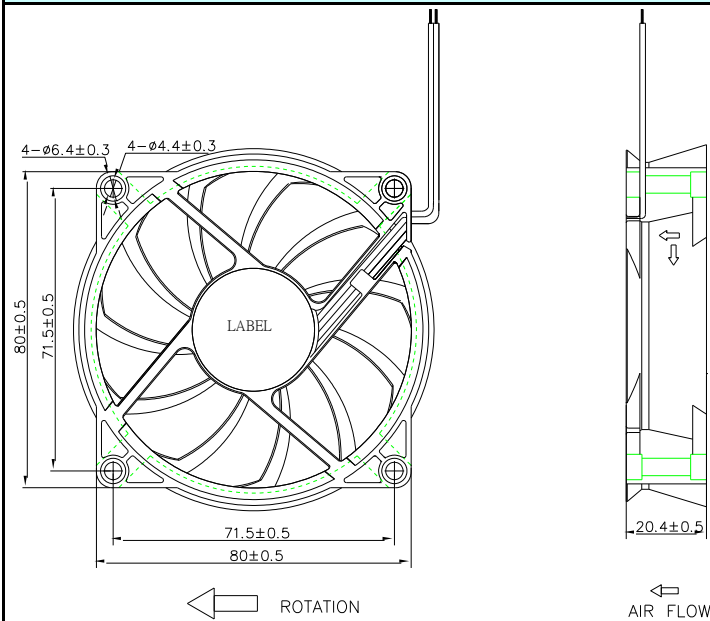

AIR FLOW-AIR PRESSURE (PERFORMANCE CURVES)
STATIC PRESSURE mm/H₂O

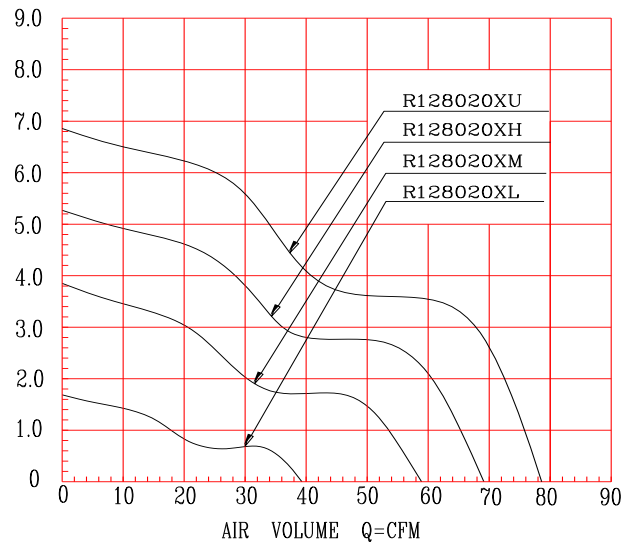

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
R128020BL	12	7~13.2	0.20	2.40	2400	39.19	1.11	1.71	27
R128020BM	12	7~13.2	0.40	4.80	3600	58.79	1.67	3.85	37.5
R128020BH	12	7~13.2	0.55	6.6	4200	68.59	1.94	5.24	42.2
R128020BU	12	7~13.2	1.00	12	4800	78.38	2.22	6.84	45
R128020SL	12	7~13.2	0.20	2.40	2400	39.19	1.11	1.71	27
R128020SM	12	7~13.2	0.40	4.80	3600	58.79	1.67	3.85	37.5
R128020SH	12	7~13.2	0.55	6.6	4200	68.59	1.94	5.24	42.2
R128020BU	12	7~13.2	1.00	12	4800	78.38	2.22	6.84	45

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

80×80×25MM SERIES

Bearing Type: Two ball bearing
EBR

Rated Voltage: 12V/24V


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance


Operating Temp : ~10~70°C

Weight : 82g

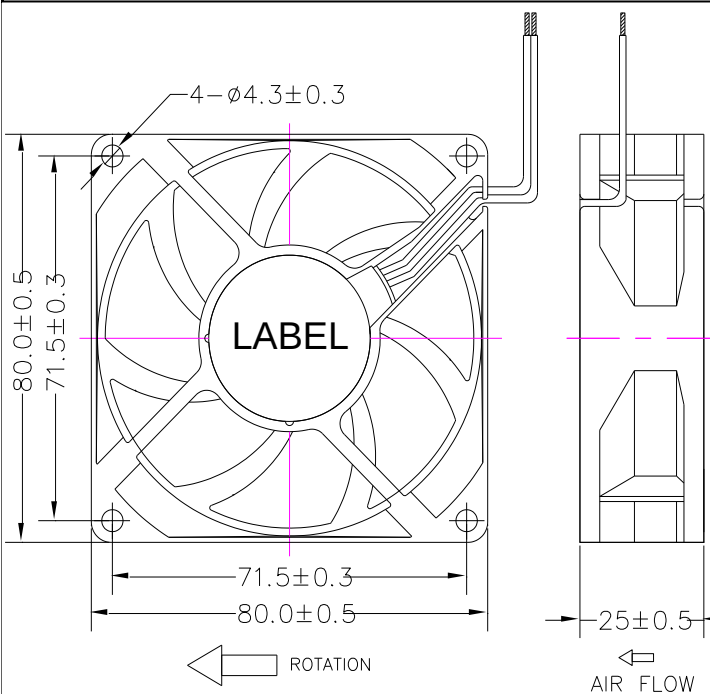

AIR FLOW-AIR PRESSURE(PERFORMANCE CURVES)

AIR PRESSURE(mmH₂O)

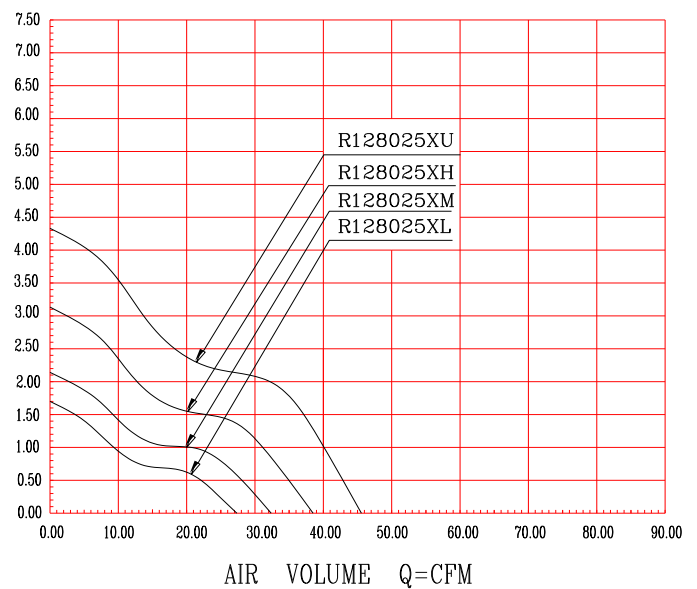

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
R128025BL	12	7~13.2	0.10	1.20	2050	27.44	0.78	1.57	26
R128025BM	12	7~13.2	0.14	1.68	2400	32.13	0.91	2.15	29
R128025BH	12	7~13.2	0.19	2.28	2900	38.82	1.10	3.14	32.5
R128025BU	12	7~13.2	0.24	2.88	3400	45.52	1.29	4.31	36.5
R128025SL	12	7~13.2	0.09	1.08	2050	27.44	0.78	1.57	26
R128025SM	12	7~13.2	0.14	1.68	2400	32.13	0.91	2.15	29
R128025SH	12	7~13.2	0.19	2.28	2900	38.82	1.10	3.14	32.5
R128025SU	12	7~13.2	0.28	3.36	3400	45.52	1.29	4.31	36.5

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

80×80×25MM SERIES

Bearing Type: Two ball bearing
EBR

Rated Voltage: 12V/24V


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance


Operating Temp : ~10~70℃

Weight : 82g

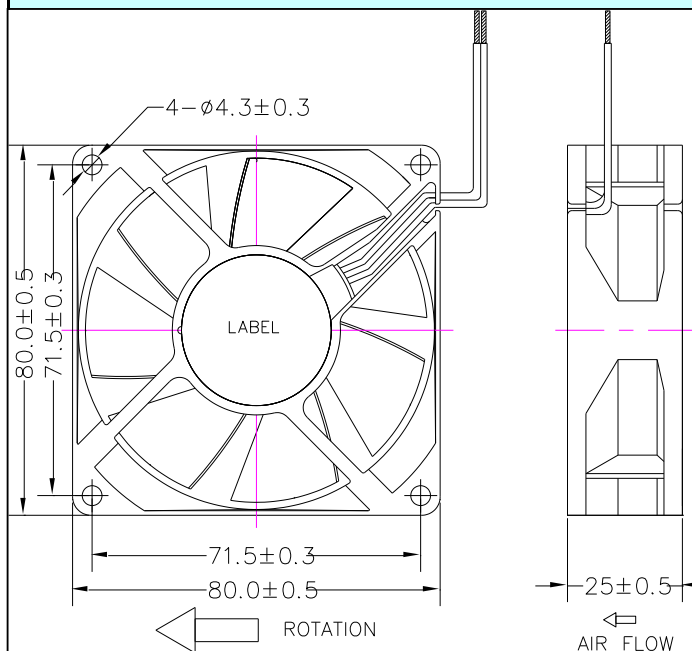

AIR FLOW-AIR PRESSURE(PERFORMANCE CURVES)

AIR PRESSURE(mmH₂O)

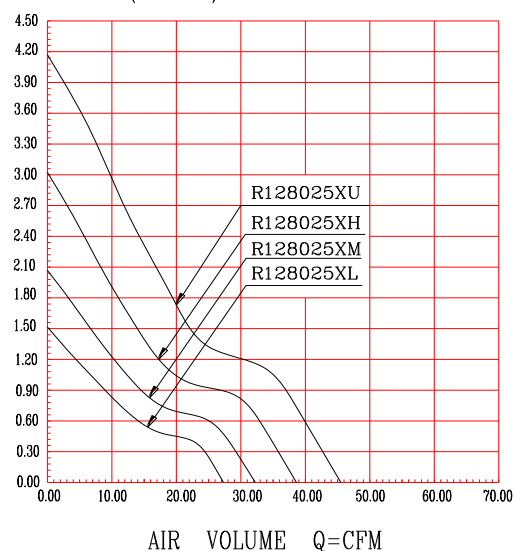

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
R128025BL	12	7~13.2	0.10	1.20	2050	27.41	0.78	1.51	25.5
R128025BM	12	7~13.2	0.14	1.68	2400	32.09	0.91	2.07	28.7
R128025BH	12	7~13.2	0.19	2.28	2900	38.77	1.10	3.03	32.5
R128025BU	12	7~13.2	0.24	2.88	3400	45.46	1.29	4.16	35.3
R128025SL	12	7~13.2	0.09	1.08	2050	27.41	0.78	1.51	25.5
R128025SM	12	7~13.2	0.14	1.68	2400	32.09	0.91	2.07	28.7
R128025SH	12	7~13.2	0.19	2.28	2900	38.77	1.10	3.03	32.5
R128025SU	12	7~13.2	0.28	3.36	3400	45.46	1.29	4.16	35.3

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

80×80×25MM SERIES

Bearing Type: Two ball bearing
EBR

Rated Voltage: 12V/24V


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance


Operating Temp : ~10~70°C

Weight : 82g

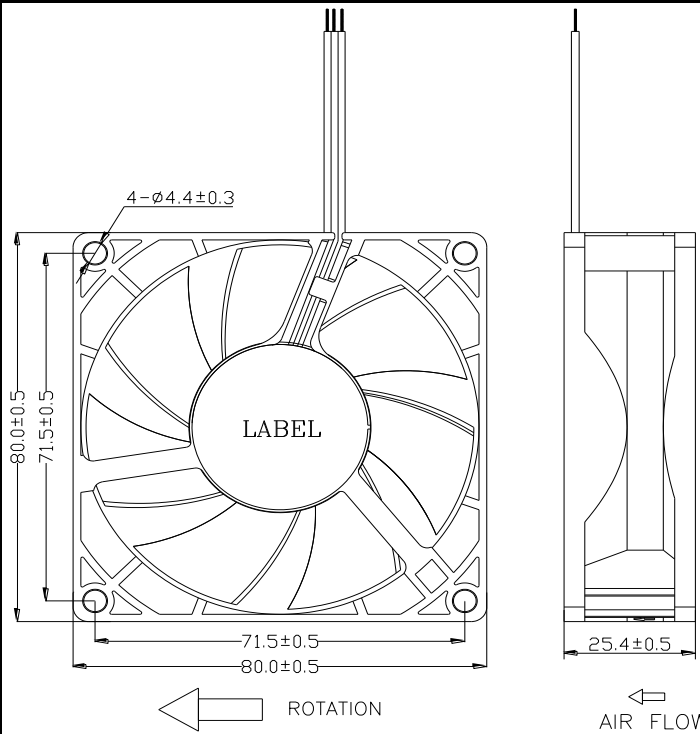

AIR FLOW-AIR PRESSURE(PERFORMANCE CURVES)

AIR PRESSURE(mmH₂O)

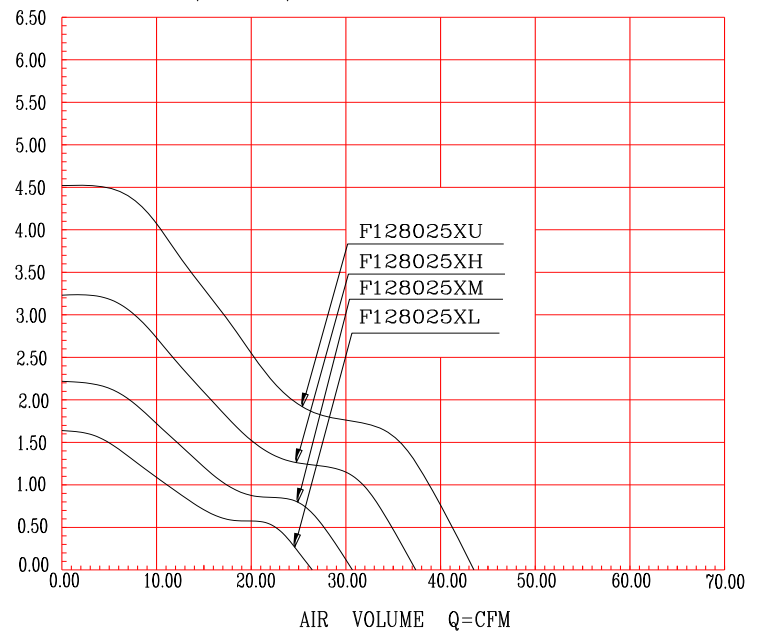

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
R128025BL	12	7~13.2	0.10	1.20	2050	26.34	0.75	1.64	26
R128025BM	12	7~13.2	0.14	1.68	2400	30.83	0.87	2.25	29.8
R128025BH	12	7~13.2	0.19	2.28	2900	37.26	1.06	3.28	35.9
R128025BU	12	7~13.2	0.24	2.88	3400	43.68	1.24	4.51	39.2
R128025SL	12	7~13.2	0.09	1.08	2050	26.34	0.75	1.64	26
R128025SM	12	7~13.2	0.14	1.68	2400	30.83	0.87	2.25	29.8
R128025SH	12	7~13.2	0.19	2.28	2900	37.26	1.06	3.28	35.9
R128025SU	12	7~13.2	0.28	3.36	3400	43.68	1.24	4.51	39.2

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

80×80×25MM SERIES

Bearing Type: Two ball bearing
EBR

Rated Voltage: 12V/24V


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance


Operating Temp : ~10~70°C

Weight : 82g

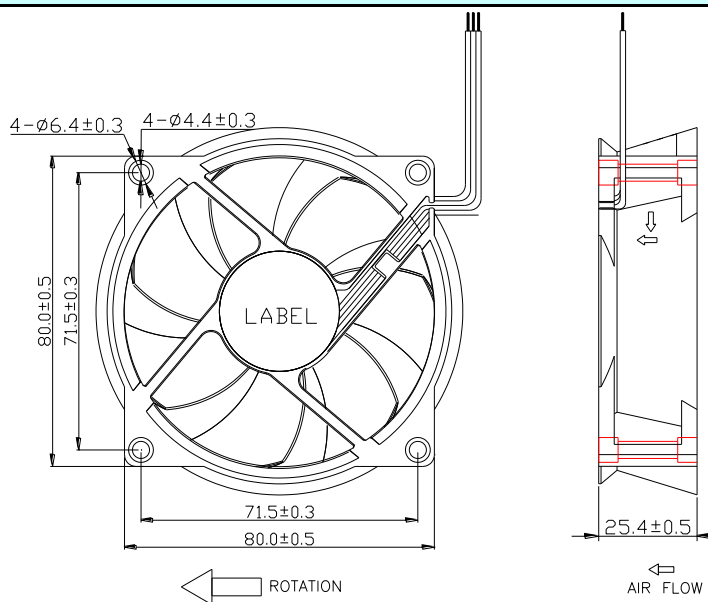

AIR FLOW-AIR PRESSURE(PERFORMANCE CURVES)

AIR PRESSURE(mmH₂O)

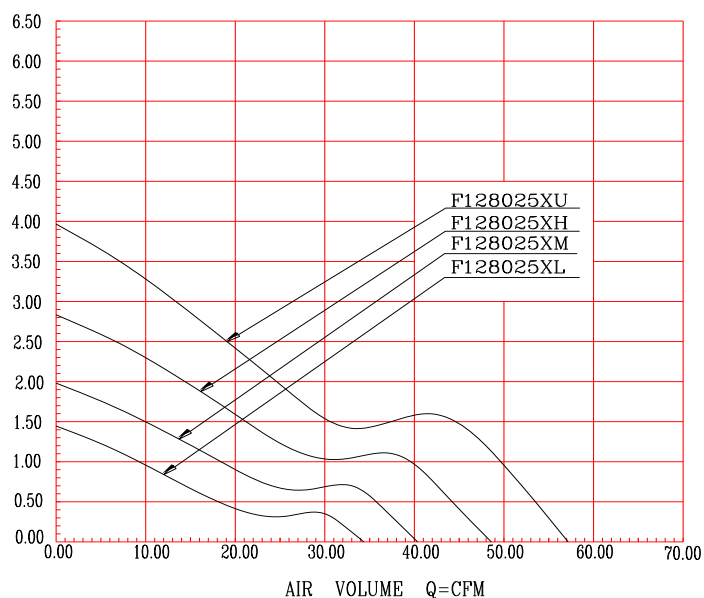

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
F128025BL	12	7~13.2	0.10	1.20	2050	34.38	0.97	1.44	23.7
F128025BM	12	7~13.2	0.14	1.68	2400	40.26	1.14	1.97	28.8
F128025BH	12	7~13.2	0.19	2.28	2900	48.64	1.38	2.88	32.3
F128025BU	12	7~13.2	0.24	2.88	3400	57.03	1.62	3.96	38.5
F128025SL	12	7~13.2	0.09	1.08	2050	34.38	0.97	1.44	23.7
F128025SM	12	7~13.2	0.14	1.68	2400	40.26	1.14	1.97	28.8
F128025SH	12	7~13.2	0.19	2.28	2900	48.64	1.38	2.88	32.3
F128025SU	12	7~13.2	0.28	3.36	3400	57.03	1.62	3.96	38.5

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

80×80×25MM SERIES

Bearing Type: Two ball bearing
EBR

Rated Voltage: 12V/24V


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance


Operating Temp : ~10~70°C

Weight : 82g

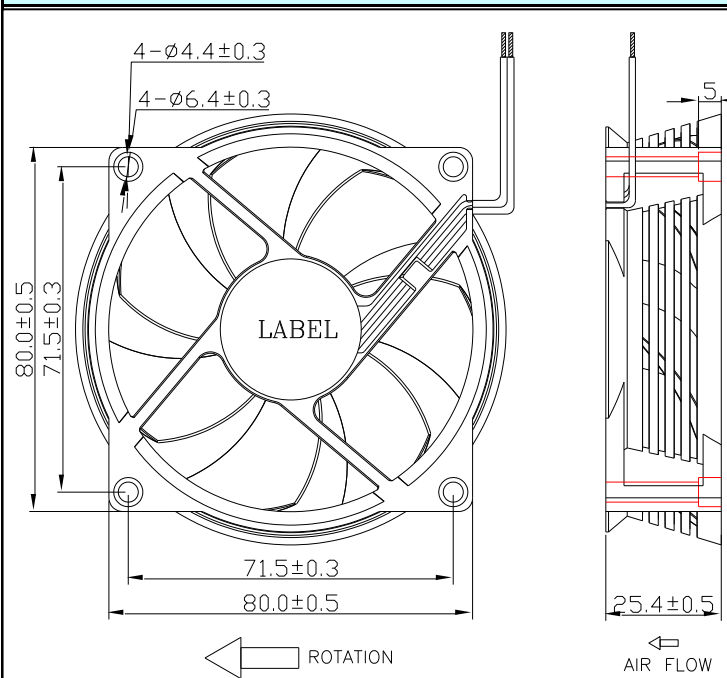

AIR FLOW-AIR PRESSURE(PERFORMANCE CURVES)

AIR PRESSURE(mmH₂O)

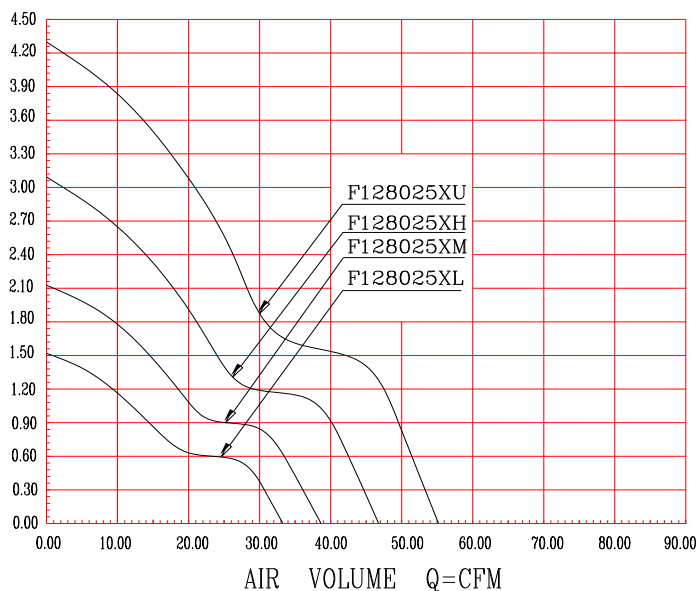

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
F128025BL	12	7~13.2	0.10	1.20	2050	33.18	0.94	1.56	21.9
F128025BM	12	7~13.2	0.14	1.68	2400	38.85	1.10	2.13	25.3
F128025BH	12	7~13.2	0.19	2.28	2900	46.94	1.33	3.11	30.5
F128025BU	12	7~13.2	0.24	2.88	3400	55.03	1.56	4.28	36.1
F128025SL	12	7~13.2	0.09	1.08	2050	33.18	0.94	1.56	21.9
F128025SM	12	7~13.2	0.14	1.68	2400	38.85	1.10	2.13	25.3
F128025SH	12	7~13.2	0.19	2.28	2900	46.94	1.33	3.11	30.5
F128025SU	12	7~13.2	0.28	3.36	3400	55.03	1.56	4.28	36.1

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

80×80×25MM SERIES

Material : Housing Plastic (UL : 94V-0)

Bearing Type: Two ball bearing

Impeller Plastic (UL : 94V-0)


EBR

Protection : Auto-Restart /Impedance

Operating Temp : ~10~70℃


Rated Voltage 12V/24V

Weight : 74g

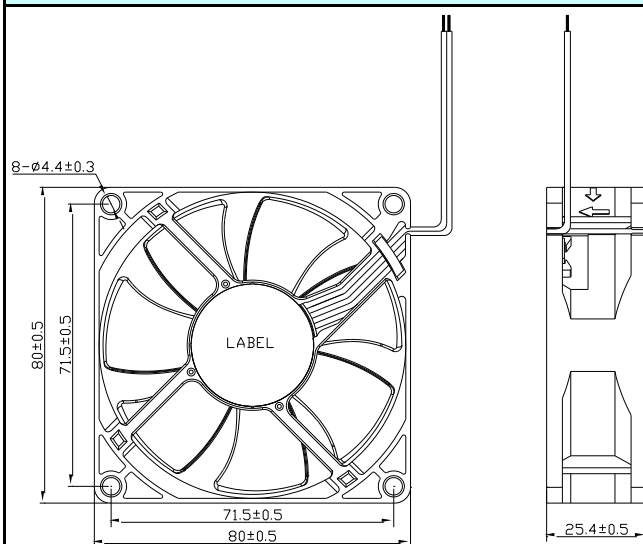

AIR FLOW—AIR PRESSURE (PERFORMANCE CURVES)

AIR PRESSURE(mmH₂O)

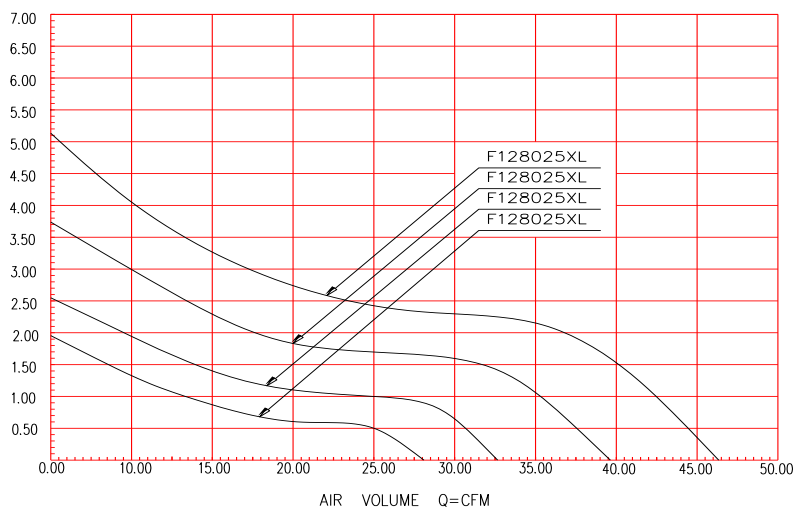

此基架模具有:8個螺絲孔及4個螺絲孔.

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
F128025BL	12	7~13.2	0.10	1.20	2050	28.01	0.79	1.87	23.2
F128025BM	12	7~13.2	0.14	1.68	2400	32.79	0.93	2.56	25.8
F128025BH	12	7~13.2	0.19	2.28	2900	39.62	1.12	3.74	32.6
F128025BU	12	7~13.2	0.24	2.88	3400	46.45	1.32	5.14	35.5
F128025SL	12	7~13.2	0.09	1.08	2050	28.01	0.79	1.87	23.2
F128025SM	12	7~13.2	0.14	1.68	2400	32.79	0.93	2.56	25.8
F128025SH	12	7~13.2	0.19	2.28	2900	39.62	1.12	3.74	32.6
F128025SU	12	7~13.2	0.28	3.36	3400	46.45	1.32	5.14	35.5

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

80×80×25MM SERIES

Bearing Type: Two ball bearing
EBR

Rated Voltage: 12V/24V


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance


Operating Temp : ~10~70°C

Weight : 82g

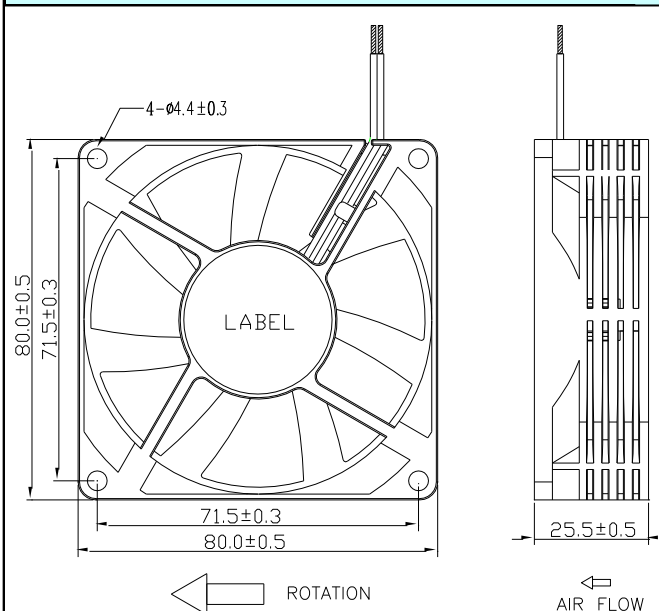

AIR PRESURE-AIR FLOW (PERFORMANCE CURVES)

AIR PRESSURE(mmH₂O)

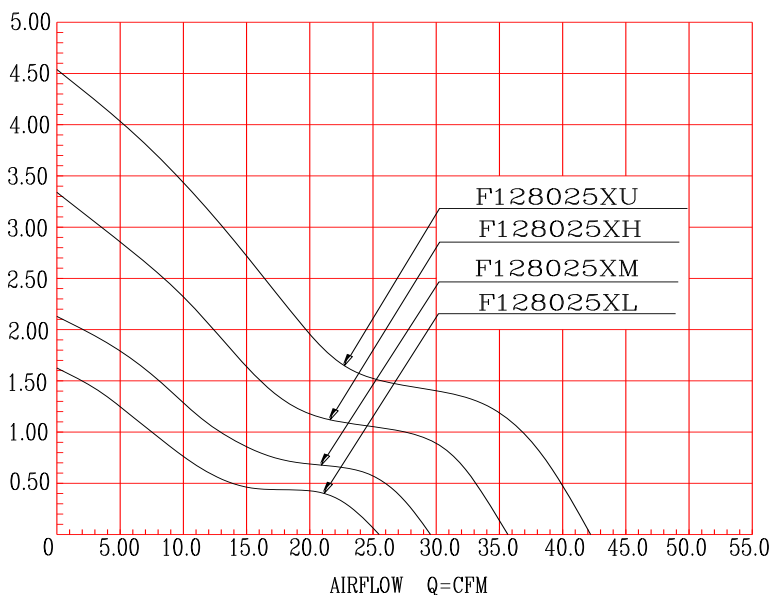

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
F128025BL	12	7~13.2	0.10	1.20	2050	25.35	0.72	1.66	22.3
F128025BM	12	7~13.2	0.14	1.68	2400	29.68	0.84	2.28	26.4
F128025BH	12	7~13.2	0.19	2.28	2900	35.87	1.02	3.33	30.6
F128025BU	12	7~13.2	0.24	2.88	3400	42.05	1.19	4.57	34.7
F128025SL	12	7~13.2	0.09	1.08	2050	25.35	0.72	1.66	22.3
F128025SM	12	7~13.2	0.14	1.68	2400	29.68	0.84	2.28	26.4
F128025SH	12	7~13.2	0.19	2.28	2900	35.87	1.02	3.33	30.6
F128025SU	12	7~13.2	0.28	3.36	3400	42.05	1.19	4.57	34.7

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

80×80×32MM SERIES

Bearing Type: Two ball bearing
EBR

Rated Voltage: 12V/24V/48V


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance


Operating Temp : ~10~70℃

Weight : 100g

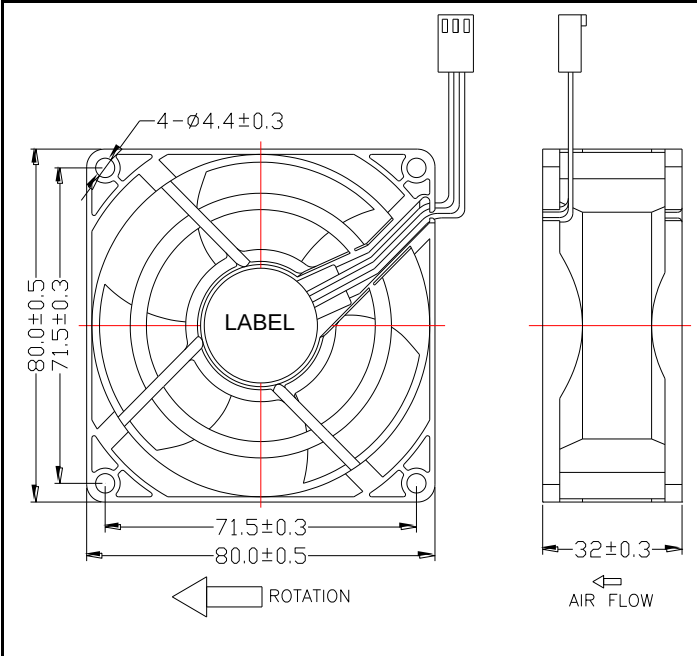

AIR FLOW-AIR PRESSURE(PERFORMANCE CURVES)

AIR PRESSURE(mmH₂O)

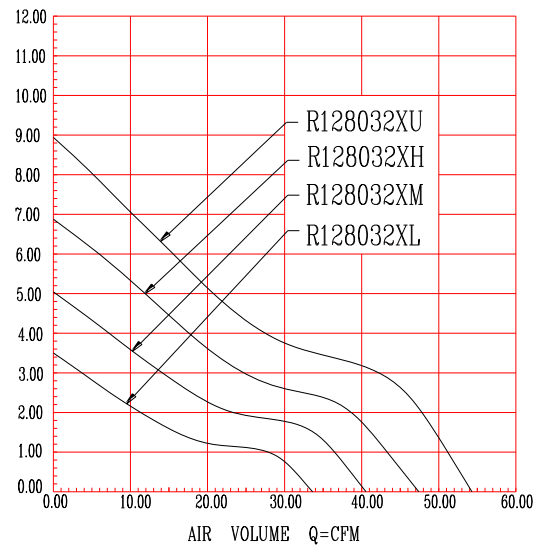

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
R128032BL	12	7~13.2	0.22	2.64	3000	33.87	0.96	3.51	27.8
R128032BM	12	7~13.2	0.30	3.60	3600	40.65	1.15	5.05	33.2
R128032BH	12	7~13.2	0.38	4.56	4200	47.42	1.34	6.88	38.7
R128032BU	12	7~13.2	0.45	5.40	4800	54.20	1.54	8.98	42.9
R128032SL	12	7~13.2	0.22	2.64	3000	33.87	0.96	3.51	27.8
R128032SM	12	7~13.2	0.30	3.60	3600	40.65	1.15	5.05	33.2
R128032SH	12	7~13.2	0.38	4.56	4200	47.42	1.34	6.88	38.7
R128032SU	12	7~13.2	0.45	5.40	4800	54.20	1.54	8.98	42.9

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

80×80×38MM SERIES

Bearing Type: Two ball bearing

Rated Voltage 12V/24V/48V


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)


Protection : Auto-Restart /Impedance

Operating Temp : ~10~70℃

Weight : 139g

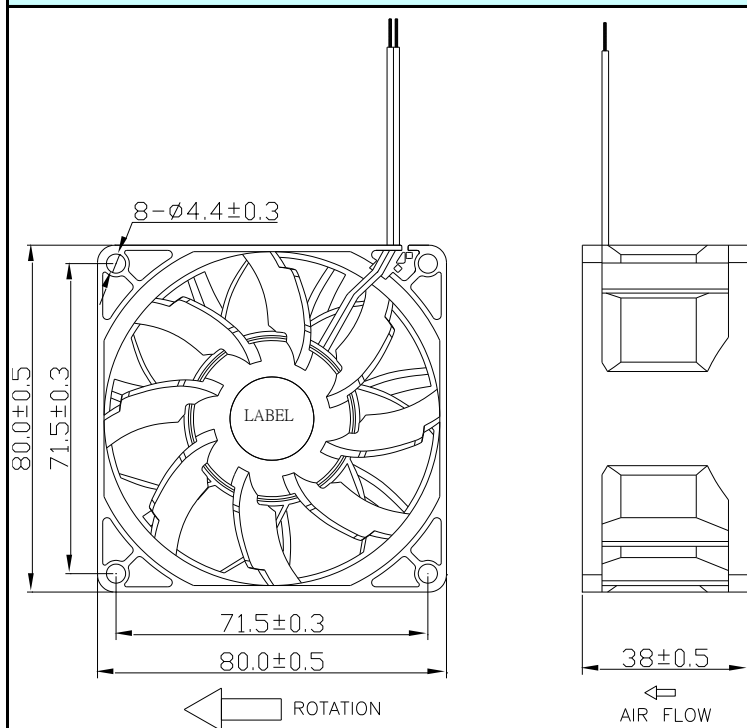

AIR PRESURE-AIR FLOW (PERFORMANCE CURVES)

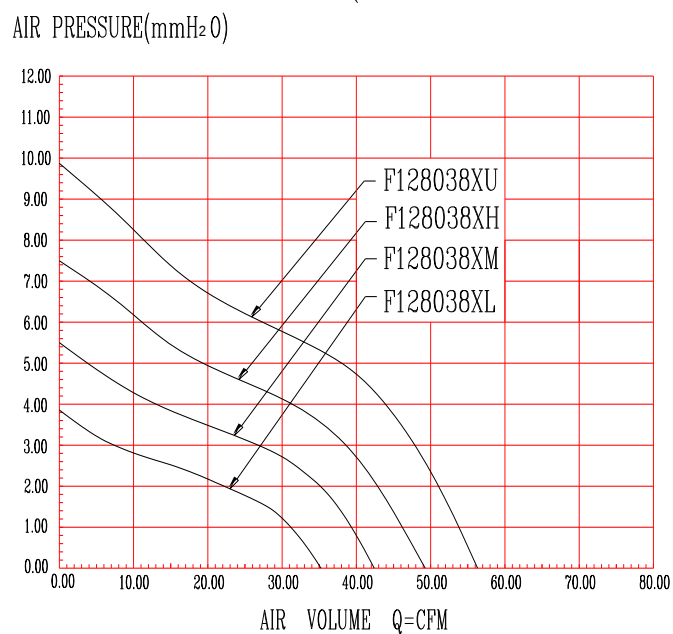

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
F128038BL	12	7~13.2	0.18	2.16	3000	35.12	1.00	3.85	36.6
F128038BM	12	7~13.2	0.25	3.00	3600	42.15	1.19	5.55	39.7
F128038BH	12	7~13.2	0.30	3.60	4200	49.18	1.39	7.56	42.5
F128038BU	12	7~13.2	0.50	6.00	4800	56.21	1.59	9.87	45.5

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

90×90×10MM SERIES

Bearing Type:

EBR

Rated Voltage: 12v L.M.H.U


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance

Operating Temp : ~10~70℃

Weight : 24g

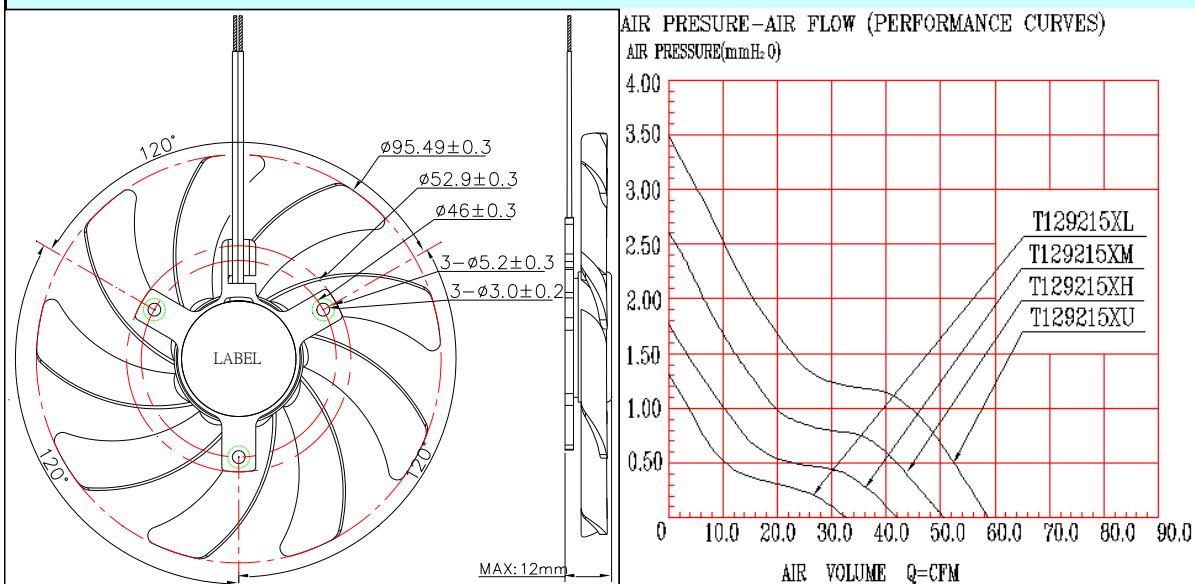

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
T129215×L	12	7~13.2	0.20	2.40	2000	32.45	0.92	1.31	20.4
T129215×M	12	7~13.2	0.25	3.00	2500	42.00	1.19	1.78	25.4
T129215×H	12	7~13.2	0.30	3.60	3000	50.40	1.43	2.56	29.4
T129215×U	12	7~13.2	0.50	6.00	3500	58.80	1.67	3.49	32.7

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

T129215×H	12	7~13.2	0.30	3.60	3000	47.43	1.34	2.29	31.2
T129215×U	12	7~13.2	0.50	6.00	3500				

90×90×10MM SERIES

Bearing Type:

EBR

Rated Voltage 12v L.M.H.U



Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance


Operating Temp : ~10~70°C

Weight : 24g

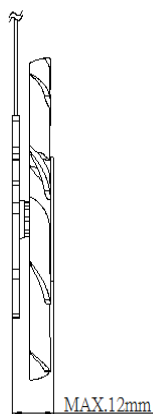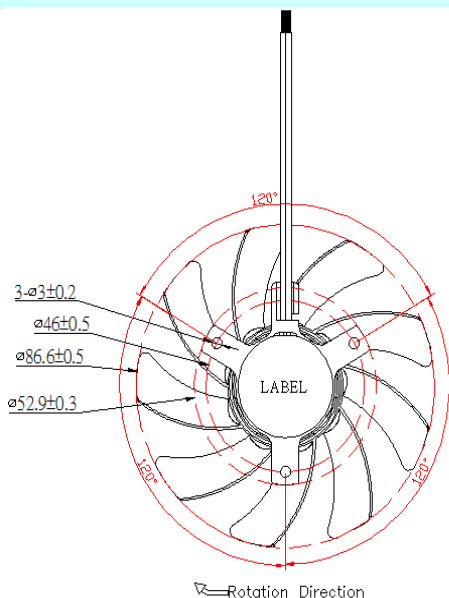

AIR PRESSURE-AIR FLOW (PERFORMANCE CURVES)

AIR PRESSURE(mmH₂O)

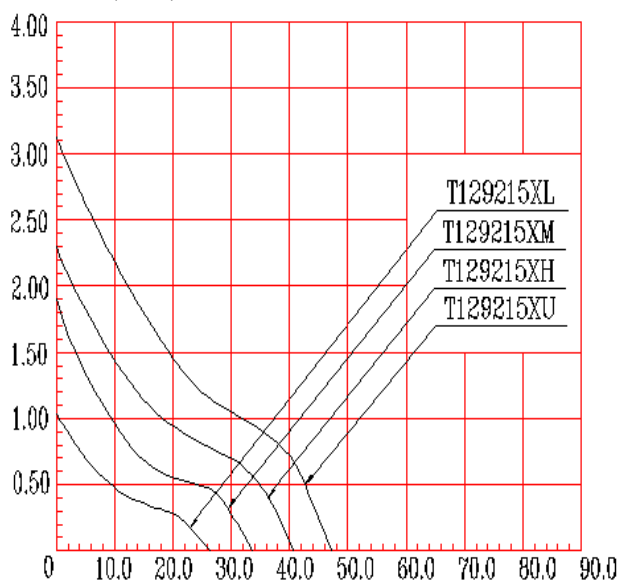

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level (dB(A))
						(CFM)	m ³ /min		
T129215×L	12	7~13.2	0.20	2.40	2000	27.05	0.77	1.02	22.4
T129215×M	12	7~13.2	0.25	3.00	2500	33.81	0.96	1.59	27.3
T129215×H	12	7~13.2	0.30	3.60	3000	40.58	1.15	2.29	31.3
T129215×U	12	7~13.2	0.50	6.00	3500	47.34	1.34	3.12	34.6

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

90×90×15MM SERIES

Bearing Type: Two ball bearing
EBR

Rated Voltage: 12v L.M.H.U



Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance

Operating Temp : ~10~70℃

Weight : 33g

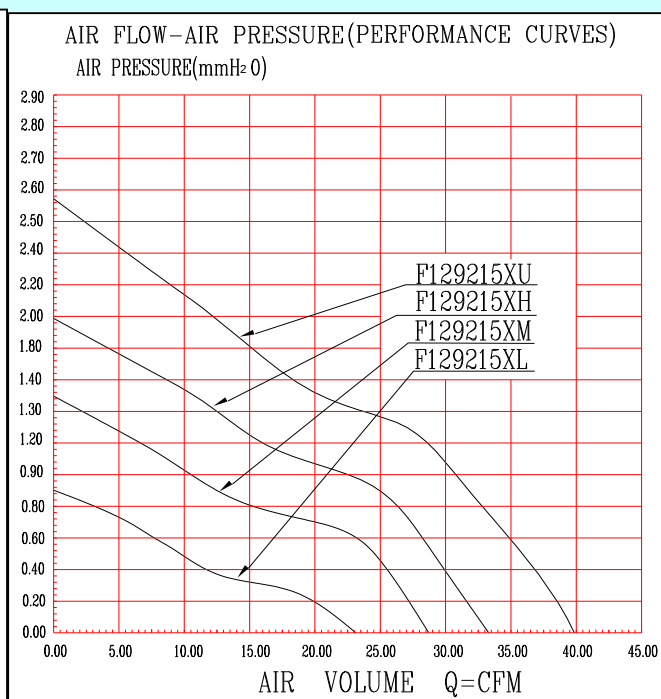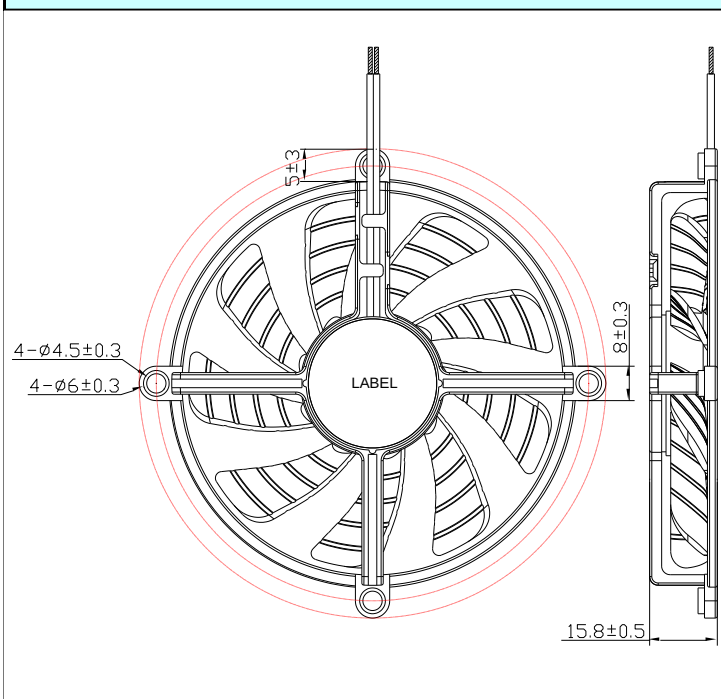

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
F129215BL	12	7~13.2	0.20	2.40	2000	23.05	0.65	0.85	23
F129215BM	12	7~13.2	0.25	3.00	2500	28.67	0.81	1.34	26
F129215BH	12	7~13.2	0.30	3.60	3000	33.89	0.96	1.98	31
F129215BU	12	7~13.2	0.50	6.00	3500	39.62	1.12	2.57	35
F129215SL	12	7~13.2	0.20	2.40	2000	23.05	0.65	0.85	23
F129215SM	12	7~13.2	0.25	3.00	2500	28.67	0.81	1.34	26
F129215SH	12	7~13.2	0.30	3.60	3000	33.89	0.96	1.98	31
F129215SU	12	7~13.2	0.50	6.00	3500	39.62	1.12	2.57	35

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

90×90×15MM SERIES

Bearing Type: Two ball bearing
EBR

Rated Voltage 12v L.M.H.U



Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance


Operating Temp : ~10~70°C

Weight : 32g

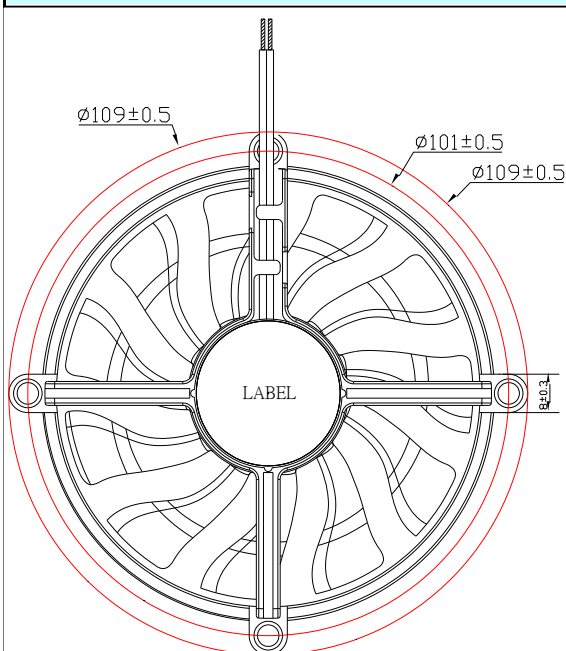

AIR FLOW-AIR PRESSURE(PERFORMANCE CURVES)

AIR PRESSURE(mmH₂O)

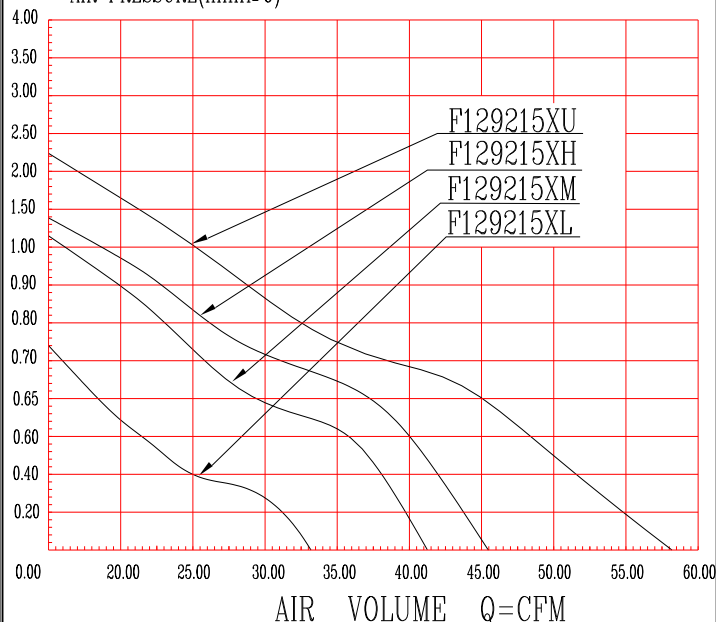

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
F129215BL	12	7~13.2	0.20	2.40	2000	33.27	0.94	0.74	29.5
F129215BM	12	7~13.2	0.25	3.00	2500	41.59	1.18	1.15	31.2
F129215BH	12	7~13.2	0.30	3.60	3000	45.47	1.29	1.38	36.2
F129215BU	12	7~13.2	0.50	6.00	3500	58.23	1.65	2.25	40.5
F129215SL	12	7~13.2	0.20	2.40	2000	33.27	0.94	0.74	29.5
F129215SM	12	7~13.2	0.25	3.00	2500	41.59	1.18	1.15	31.2
F129215SH	12	7~13.2	0.30	3.60	3000	45.47	1.29	1.38	36.2
F129215SU	12	7~13.2	0.50	6.00	3500	58.23	1.65	2.25	40.5

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

90×90×15MM SERIES

Bearing Type: Two ball bearing
EBR

Rated Voltage 12v L.M.H.U


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)


Protection : Auto-Restart /Impedance

Operating Temp : ~10~70℃

Weight : 32g

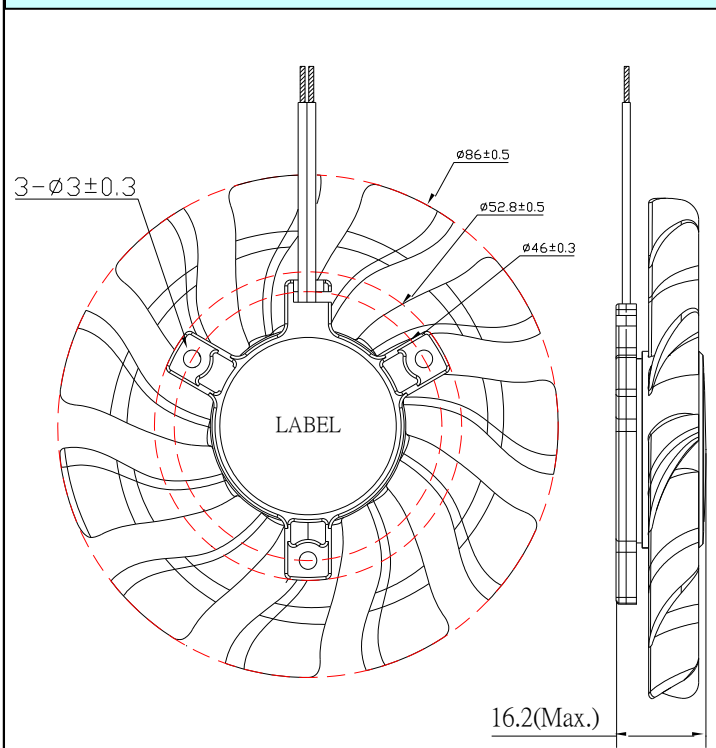

AIR FLOW-AIR PRESSURE(PERFORMANCE CURVES)
AIR PRESSURE(mmH₂O)

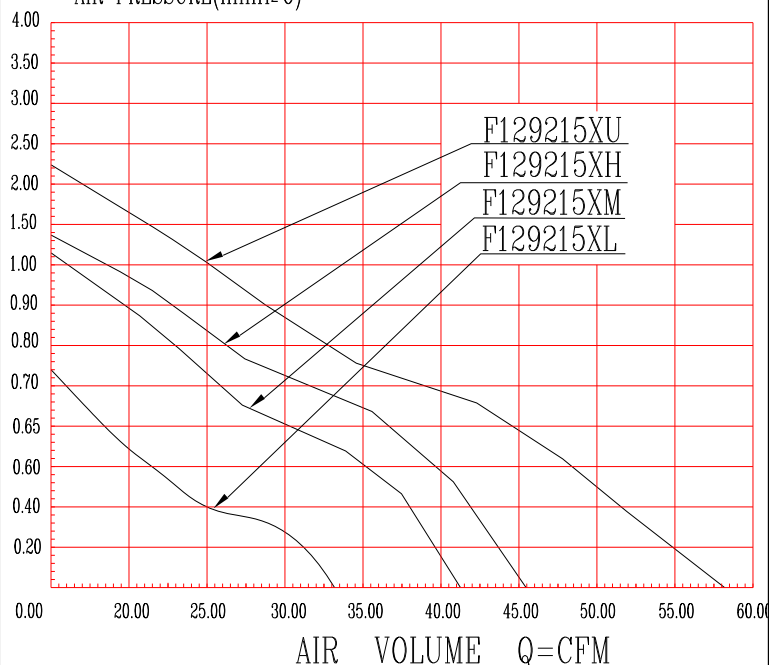

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
T129215BL	12	7~13.2	0.20	2.40	2000	33.27	0.94	0.74	29
T129215BM	12	7~13.2	0.25	3.00	2500	41.59	1.18	1.15	31.2
T129215BH	12	7~13.2	0.30	3.60	3000	45.47	1.29	1.38	33
T129215BU	12	7~13.2	0.50	6.00	3500	58.23	1.65	2.25	38
T129215SL	12	7~13.2	0.20	2.40	2000	33.27	0.94	0.74	29
T129215SM	12	7~13.2	0.25	3.00	2500	41.59	1.18	1.15	31.2
T129215SH	12	7~13.2	0.30	3.60	3000	45.47	1.29	1.38	33
T129215SU	12	7~13.2	0.50	6.00	3500	58.23	1.65	2.25	38

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

90×90×15MM SERIES

Bearing Type: Two ball bearing
EBR

Rated Voltage 12v L.M.H.U


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance


Operating Temp : ~10~70°C

Weight : 32g

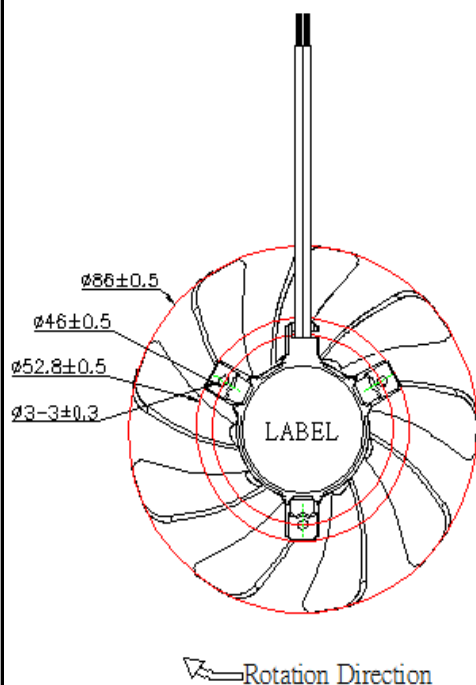

AIR PRESURE-AIR FLOW (PERFORMANCE CURVES)

AIR PRESSURE(mmH₂O)

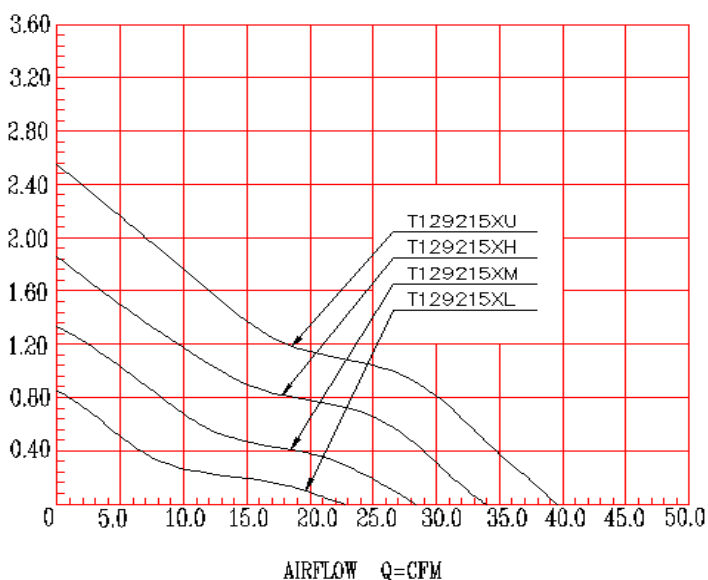

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
T129215BL	12	7~13.2	0.20	2.40	2000	22.64	0.64	0.84	23.4
T129215BM	12	7~13.2	0.25	3.00	2500	28.30	0.80	1.31	28.3
T129215BH	12	7~13.2	0.30	3.60	3000	33.96	0.96	1.89	32.3
T129215BU	12	7~13.2	0.50	6.00	3500	39.62	1.12	2.57	35.6
T129215SL	12	7~13.2	0.20	2.40	2000	22.64	0.64	0.84	23.4
T129215SM	12	7~13.2	0.25	3.00	2500	39.62	1.12	2.57	35.6
T129215SH	12	7~13.2	0.30	3.60	3000	28.30	0.80	1.31	28.3
T129215SU	12	7~13.2	0.50	6.00	3500	39.62	1.12	2.57	35.6

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

90×90×15MM SERIES

Bearing Type: Two ball bearing
EBR

Rated Voltage: 12v L.M.H.U



Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 29g

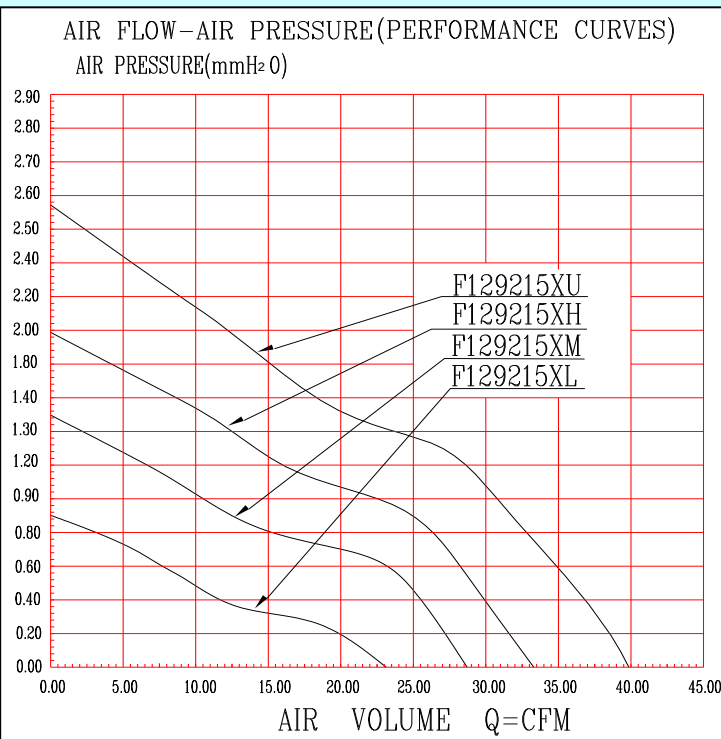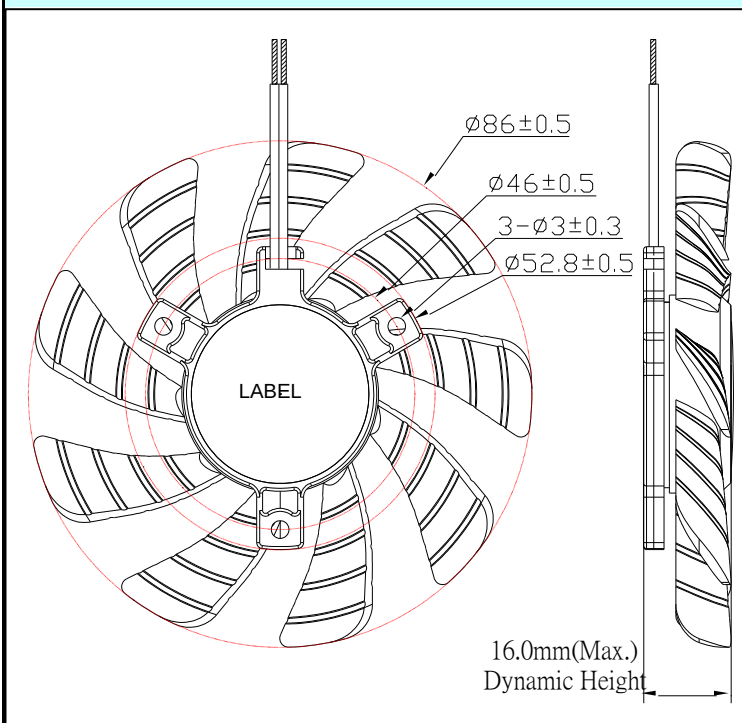

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
T129215BL	12	7~13.2	0.20	2.40	2000	23.05	0.65	0.85	23
T129215BM	12	7~13.2	0.25	3.00	2500	28.67	0.81	1.34	26
T129215BH	12	7~13.2	0.30	3.60	3000	33.89	0.96	1.98	31
T129215BU	12	7~13.2	0.50	6.00	3500	39.62	1.12	2.57	35
T129215SL	12	7~13.2	0.20	2.40	2000	23.05	0.65	0.85	23
T129215SM	12	7~13.2	0.25	3.00	2500	28.67	0.81	1.34	26
T129215SH	12	7~13.2	0.30	3.60	3000	33.89	0.96	1.98	31
T129215SU	12	7~13.2	0.50	6.00	3500	39.62	1.12	2.57	35

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

90×90×25MM SERIES

Bearing Type: Two ball bearing
EBR

Rated Voltage: 12V/24V/48V


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)


Protection : Auto-Restart /Impedance

Operating Temp : ~10~70℃

Weight : 103g

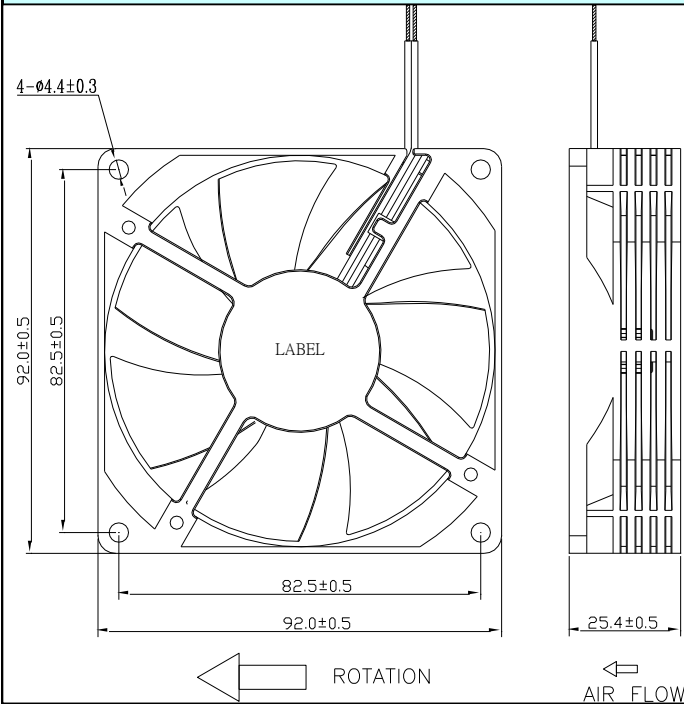

AIR PRESURE-AIR FLOW (PERFORMANCE CURVES)

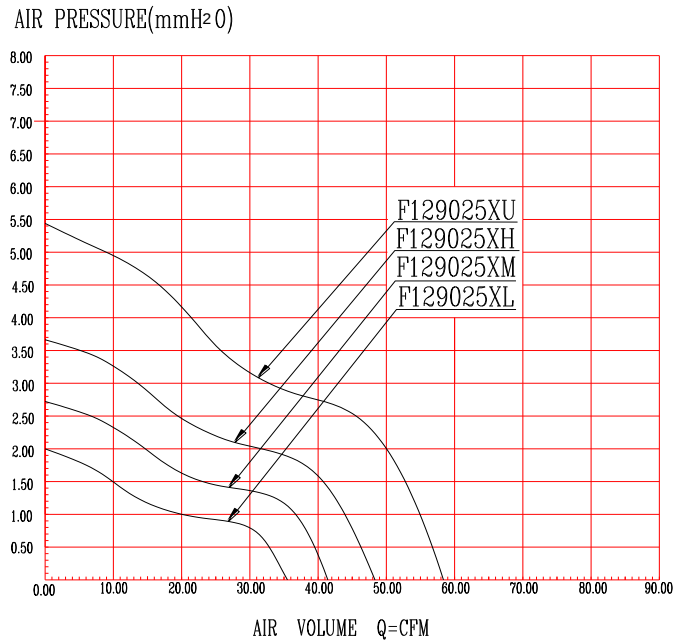

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
F129025BL	12	7~13.2	0.13	1.56	2100	35.53	1.01	2.00	27
F129025BM	12	7~13.2	0.18	2.16	2450	41.45	1.17	2.73	30.1
F129025BH	12	7~13.2	0.24	2.88	2850	48.22	1.37	3.69	35
F129025BU	12	7~13.2	0.38	4.56	3450	58.37	1.65	5.41	41.5
F129025SL	12	7~13.2	0.12	1.44	2100	35.53	1.01	2.00	27
F129025SM	12	7~13.2	0.18	2.16	2450	41.45	1.17	2.73	30.1
F129025SH	12	7~13.2	0.25	3.00	2850	48.22	1.37	3.69	35
F129025SU	12	7~13.2	0.38	4.56	3450	58.37	1.65	5.41	41.5

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

90×90×25MM SERIES

Bearing Type: Two ball bearing

Rated Voltage 12V/24V/48V


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance


Operating Temp : ~10~70℃

Weight : 113g

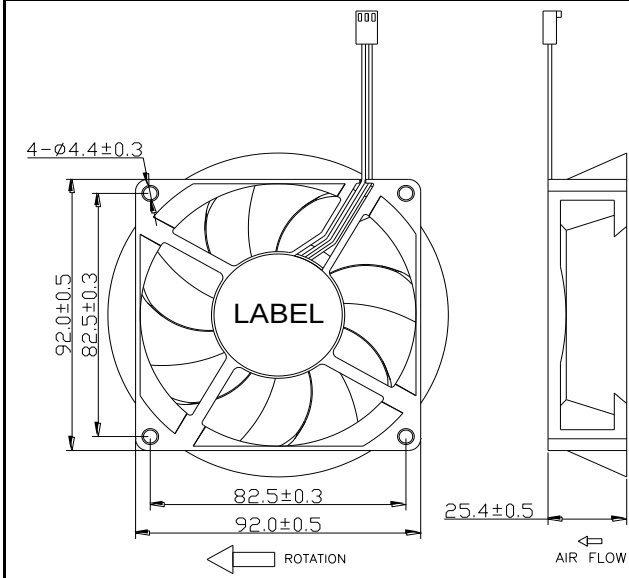

AIR FLOW-AIR PRESSURE(PERFORMANCE CURVES)

AIR PRESSURE(mmH₂O)

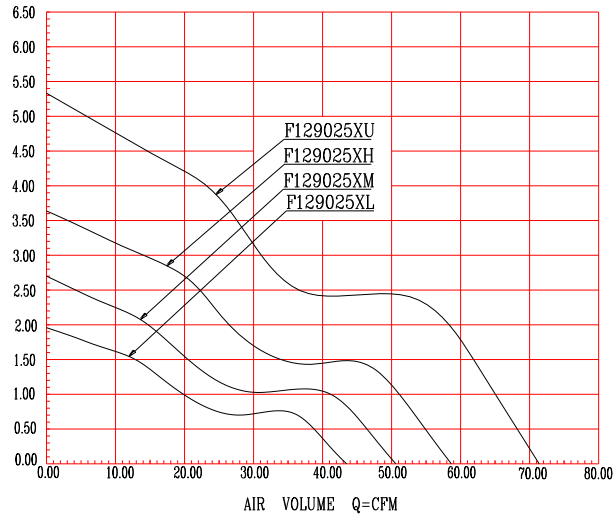

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
F129025BL	12	7~13.2	0.13	1.56	2100	43.44	1.23	1.98	27
F129025BM	12	7~13.2	0.18	2.16	2450	50.68	1.44	2.70	31.1
F129025BH	12	7~13.2	0.24	2.88	2850	58.95	1.67	3.65	37.1
F129025BU	12	7~13.2	0.38	4.56	3450	71.36	2.02	5.35	41.6

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

90×90×25MM SERIES

Bearing Type: Two ball bearing
EBR

Rated Voltage 12V/24V/48V


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance


Operating Temp : ~10~70℃

Weight : 103g

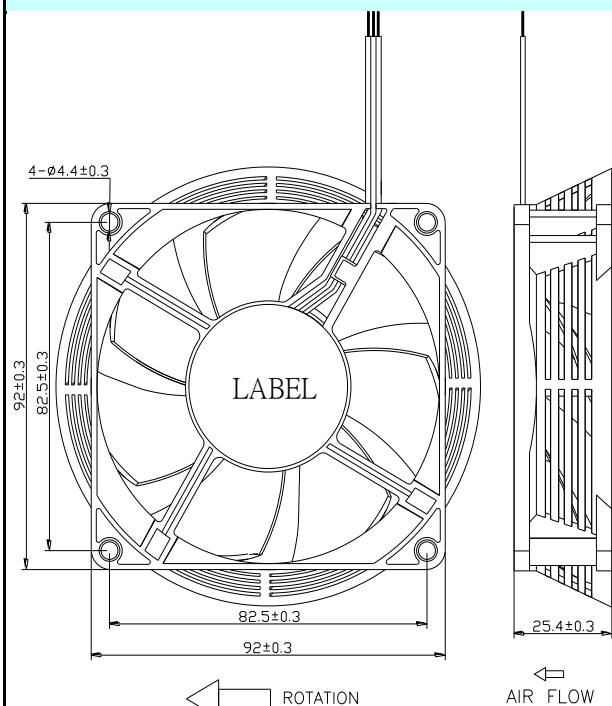

AIR PRESURE-AIR FLOW (PERFORMANCE CURVES)

AIR PRESSURE(mmH₂O)

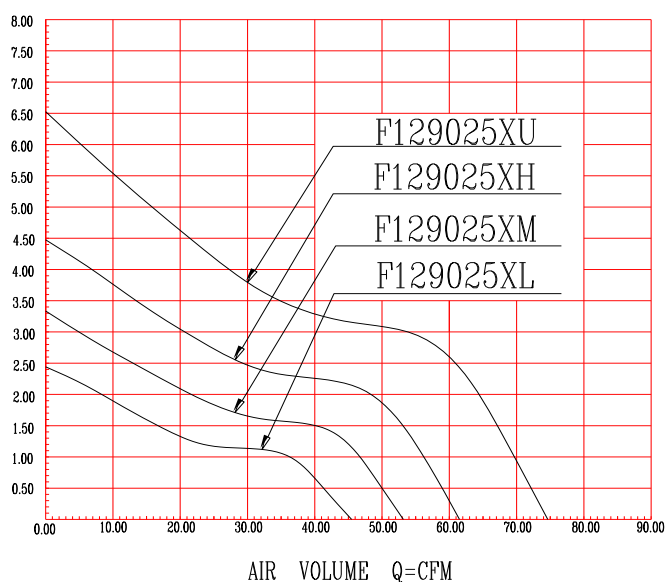

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
F129025BL	12	7~13.2	0.13	1.56	2100	45.45	1.29	2.43	28
F129025BM	12	7~13.2	0.18	2.16	2450	53.02	1.50	3.31	30.7
F129025BH	12	7~13.2	0.24	2.88	2850	61.68	1.75	4.48	36.5
F129025BU	12	7~13.2	0.38	4.56	3450	74.66	2.12	6.57	40
F129025SL	12	7~13.2	0.12	1.44	2100	45.45	1.29	2.43	28
F129025SM	12	7~13.2	0.18	2.16	2450	53.02	1.50	3.31	30.7
F129025SH	12	7~13.2	0.25	3.00	2850	61.68	1.75	4.48	36.5
F129025SU	12	7~13.2	0.38	4.56	3450	74.66	2.12	6.57	40

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

90×90×25MM SERIES

Bearing Type: Two ball bearing
EBR

Rated Voltage: 12V/24V/48V


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)


Protection : Auto-Restart /Impedance

Operating Temp : ~10~70℃

Weight : 108g

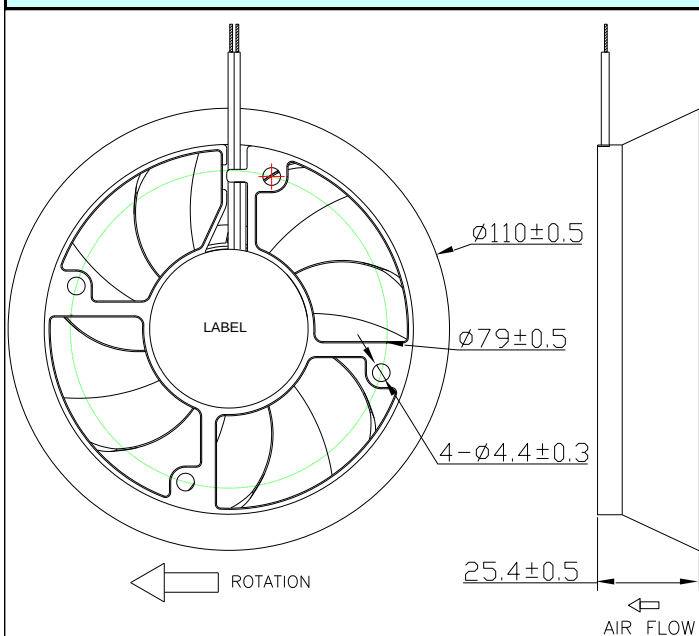

AIR PRESSURE-AIR FLOW (PERFORMANCE CURVES)

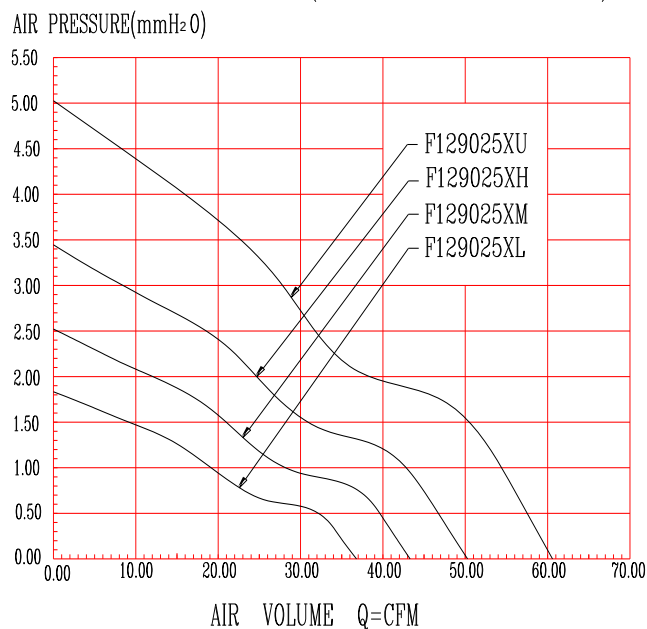

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
F129025BL	12	7~13.2	0.13	1.56	2100	36.95	1.05	1.88	34.8
F129025BM	12	7~13.2	0.18	2.16	2450	43.11	1.22	2.56	37.5
F129025BH	12	7~13.2	0.24	2.88	2850	50.14	1.42	3.47	40.1
F129025BU	12	7~13.2	0.38	4.56	3450	60.70	1.72	5.08	43.5
F129025SL	12	7~13.2	0.13	1.56	2100	36.95	1.05	1.88	34.8
F129025SM	12	7~13.2	0.18	2.16	2450	43.11	1.22	2.56	37.5
F129025SH	12	7~13.2	0.24	2.88	2850	50.14	1.42	3.47	40.1
F129025SU	12	7~13.2	0.38	4.56	3450	60.70	1.72	5.08	43.5

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

90×90×25MM SERIES

Bearing Type: Two ball bearing
EBR

Rated Voltage: 12V/24V/48V


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance


Operating Temp : ~10~70°C

Weight : 103g

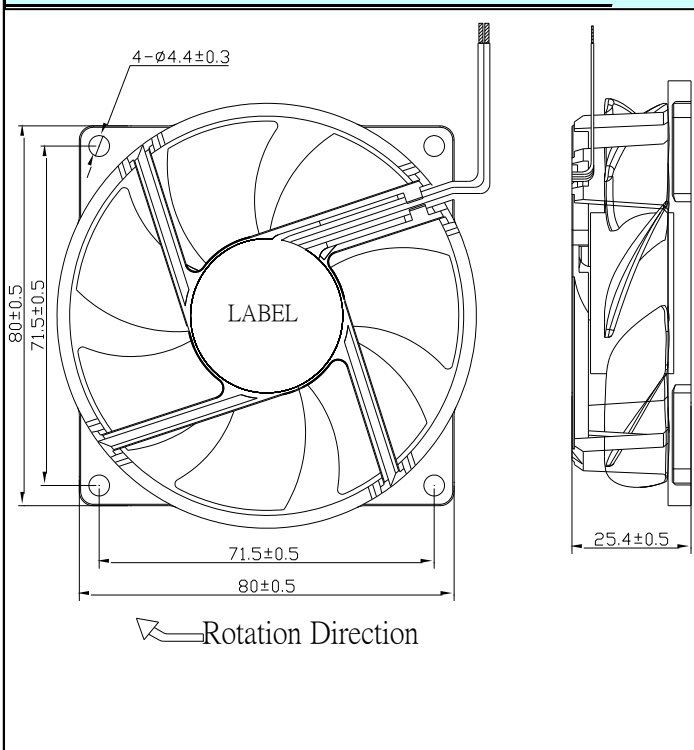

AIR FLOW-AIR PRESSURE(PERFORMANCE CURVES)

AIR PRESSURE(mmH₂O)

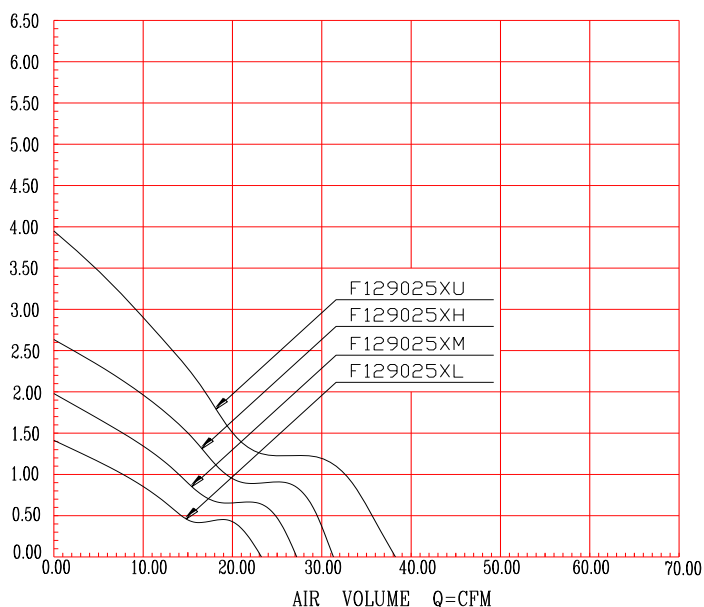

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
F129025BL	12	7~13.2	0.13	1.56	2100	23.29	0.66	1.45	23.2
F129025BM	12	7~13.2	0.18	2.16	2450	27.17	0.77	1.98	26.7
F129025BH	12	7~13.2	0.24	2.88	2850	31.61	0.90	2.68	31.6
F129025BU	12	7~13.2	0.38	4.56	3450	38.26	1.08	3.93	36.5
F129025SL	12	7~13.2	0.12	1.44	2100	23.29	0.66	1.45	23.2
F129025SM	12	7~13.2	0.18	2.16	2450	27.17	0.77	1.98	26.7
F129025SH	12	7~13.2	0.25	3.00	2850	31.61	0.90	2.68	31.6
F129025SU	12	7~13.2	0.38	4.56	3450	38.26	1.08	3.93	36.5

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

90×90×25MM SERIES

Bearing Type: Two ball bearing
EBR

Rated Voltage: 12V/24V/48V


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)


Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 103g

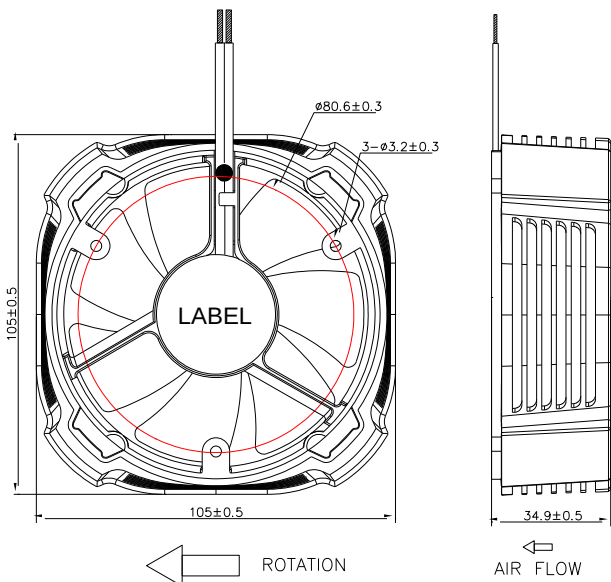

AIR FLOW-AIR PRESSURE(PERFORMANCE CURVES)
AIR PRESSURE(mmH₂O)

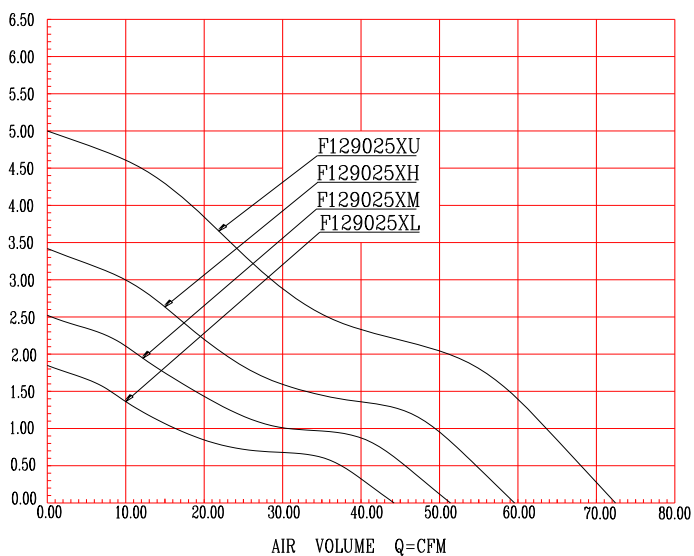

MODEL	Rated Voltage	Operating Voltage Range	Rated Current	Rated Input Power	Rated Speed	Air Flow		Static Pressure (mmH ₂ O)	Sound level
	(V)	(V)	(Amp)	(W)	(rpm)	(CFM)	m ³ /min		dB(A)
F129025BL	12	7~13.2	0.13	1.56	2100	44.11	1.25	1.85	35.1
F129025BM	12	7~13.2	0.18	2.16	2450	51.46	1.46	2.52	39.7
F129025BH	12	7~13.2	0.24	2.88	2850	59.87	1.70	3.41	44.8
F129025BU	12	7~13.2	0.38	4.56	3450	72.47	2.05	5.00	49
F129025SL	12	7~13.2	0.12	1.44	2100	44.11	1.25	1.85	35.1
F129025SM	12	7~13.2	0.18	2.16	2450	51.46	1.46	2.52	39.7
F129025SH	12	7~13.2	0.25	3.00	2850	59.87	1.70	3.41	44.8
F129025SU	12	7~13.2	0.38	4.56	3450	72.47	2.05	5.00	49

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

90×90×25MM SERIES

Bearing Type: Two ball bearing
EBR

Rated Voltage: 12V/24V/48V


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance


Operating Temp : ~10~70℃

Weight : 103g

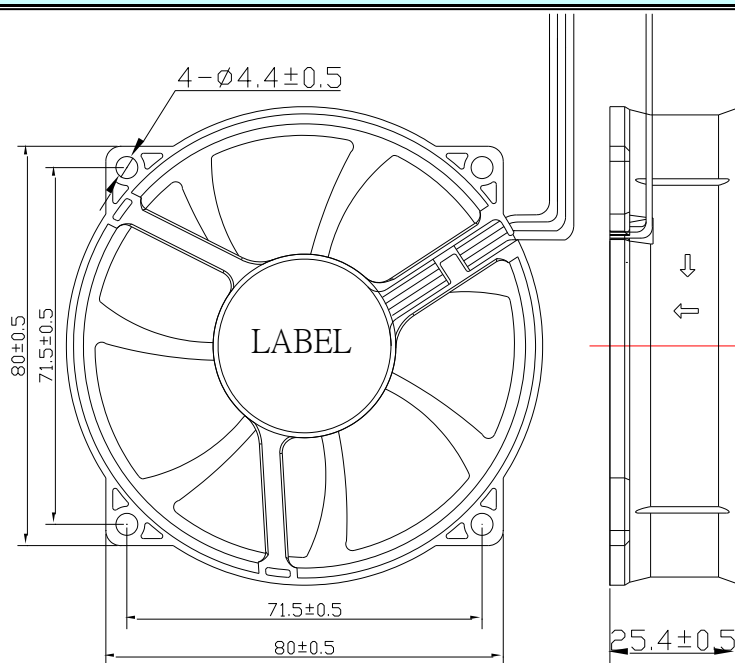

AIR FLOW-AIR PRESSURE(PERFORMANCE CURVES)

AIR PRESSURE(mmH₂O)

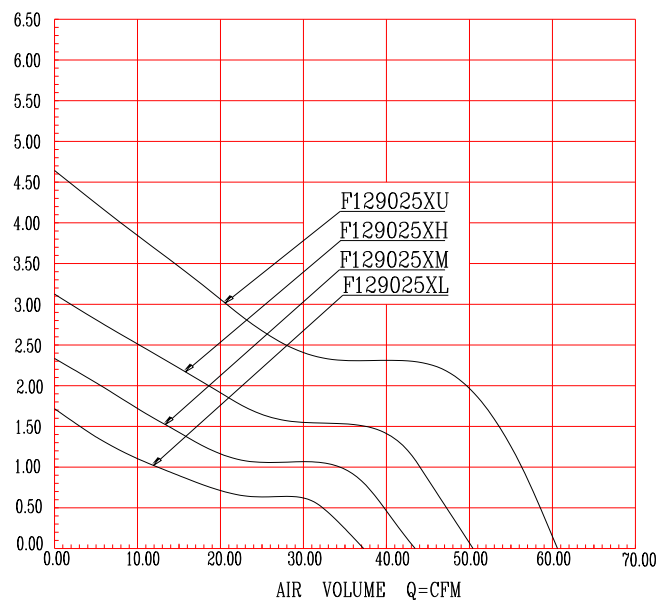

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
F129025BL	12	7~13.2	0.13	1.56	2100	37.36	1.06	1.72	26
F129025BM	12	7~13.2	0.18	2.16	2450	43.59	1.23	2.34	30.5
F129025BH	12	7~13.2	0.24	2.88	2850	50.71	1.44	3.17	34.5
F129025BU	12	7~13.2	0.38	4.56	3450	61.38	1.74	4.64	39.9
F129025SL	12	7~13.2	0.12	1.44	2100	37.36	1.06	1.72	26
F129025SM	12	7~13.2	0.18	2.16	2450	43.59	1.23	2.34	30.5
F129025SH	12	7~13.2	0.25	3.00	2850	50.71	1.44	3.17	34.5
F129025SU	12	7~13.2	0.38	4.56	3450	61.38	1.74	4.64	39.9

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

90×90×25MM SERIES

Bearing Type: Two ball bearing
EBR

Rated Voltage: 12V/24V/48V


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)


Protection : Auto-Restart /Impedance

Operating Temp : ~10~70℃

Weight : 103g

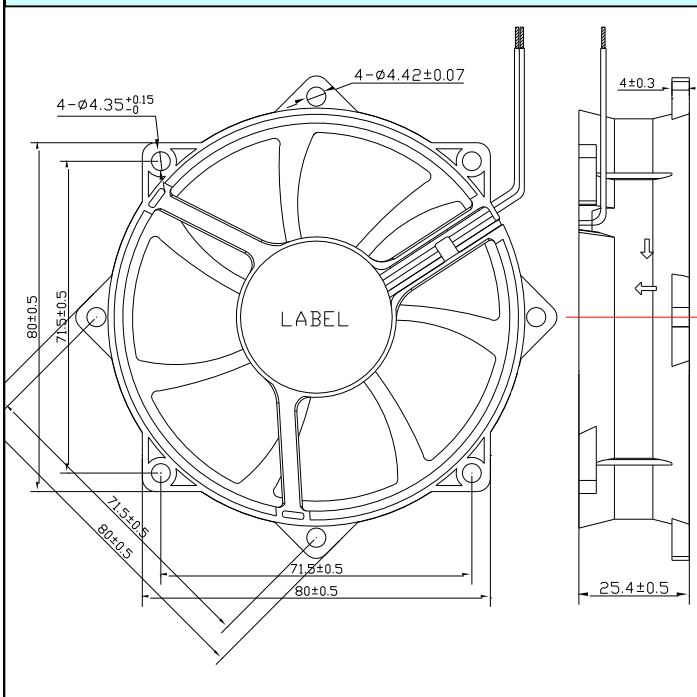

AIR FLOW-AIR PRESSURE(PERFORMANCE CURVES)
AIR PRESSURE(mmH₂O)

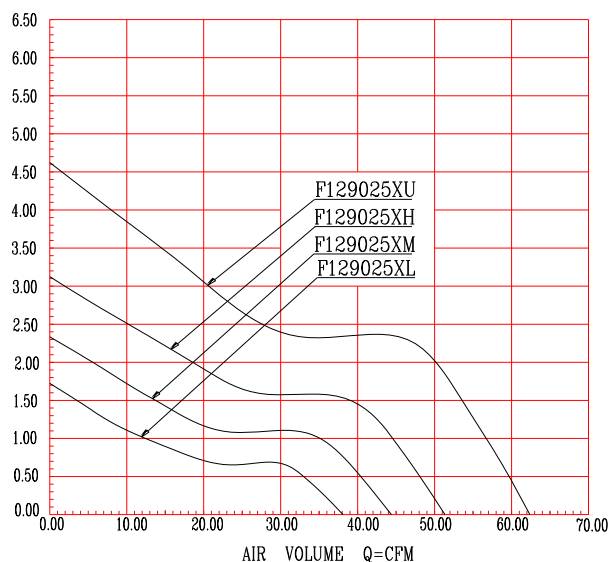

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
F129025BL	12	7~13.2	0.13	1.56	2100	38.03	1.08	1.71	26
F129025BM	12	7~13.2	0.18	2.16	2450	44.37	1.26	2.33	30.5
F129025BH	12	7~13.2	0.24	2.88	2850	51.61	1.46	3.15	34.5
F129025BU	12	7~13.2	0.38	4.56	3450	62.47	1.77	4.62	39.9
F129025SL	12	7~13.2	0.12	1.44	2100	38.03	1.08	1.71	26
F129025SM	12	7~13.2	0.18	2.16	2450	44.37	1.26	2.33	30.5
F129025SH	12	7~13.2	0.25	3.00	2850	51.61	1.46	3.15	34.5
F129025SU	12	7~13.2	0.38	4.56	3450	62.47	1.77	4.62	39.9

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

90×90×25MM SERIES

Bearing Type: Two ball bearing
EBR

Rated Voltage: 12V/24V/48V


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance


Operating Temp : ~10~70℃

Weight : 103g

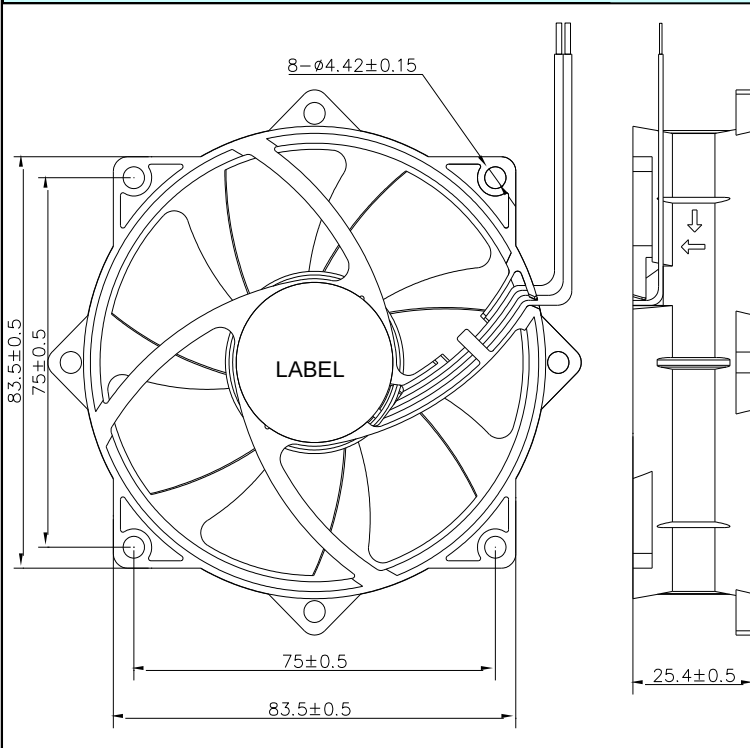

AIR FLOW-AIR PRESSURE(PERFORMANCE CURVES)

AIR PRESSURE(mmH₂O)

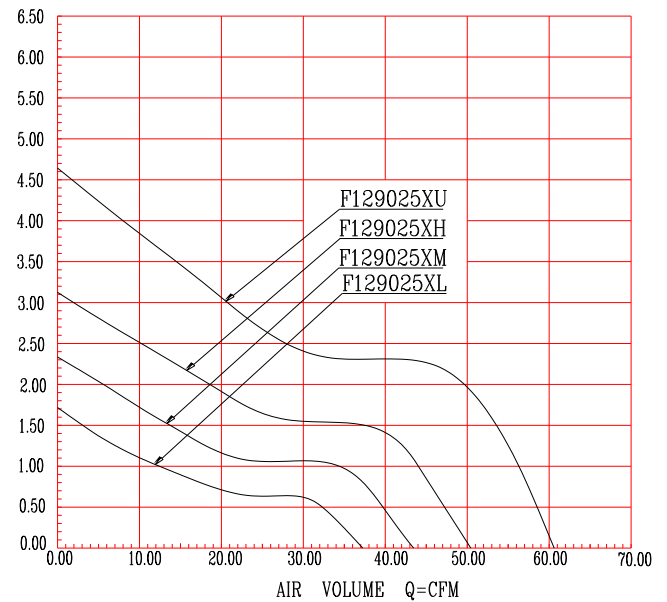

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
F129025BL	12	7~13.2	0.13	1.56	2100	37.36	1.06	1.72	26
F129025BM	12	7~13.2	0.18	2.16	2450	43.59	1.23	2.34	30.5
F129025BH	12	7~13.2	0.24	2.88	2850	50.71	1.44	3.17	34.5
F129025BU	12	7~13.2	0.38	4.56	3450	61.38	1.74	4.64	39.9
F129025SL	12	7~13.2	0.12	1.44	2100	37.36	1.06	1.72	26
F129025SM	12	7~13.2	0.18	2.16	2450	43.59	1.23	2.34	30.5
F129025SH	12	7~13.2	0.25	3.00	2850	50.71	1.44	3.17	34.5
F129025SU	12	7~13.2	0.38	4.56	3450	61.38	1.74	4.64	39.9

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

90×90×25MM SERIES

Bearing Type: Two ball bearing
EBR

Rated Voltage: 12V/24V/48V


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance


Operating Temp : ~10~70℃

Weight : 103g

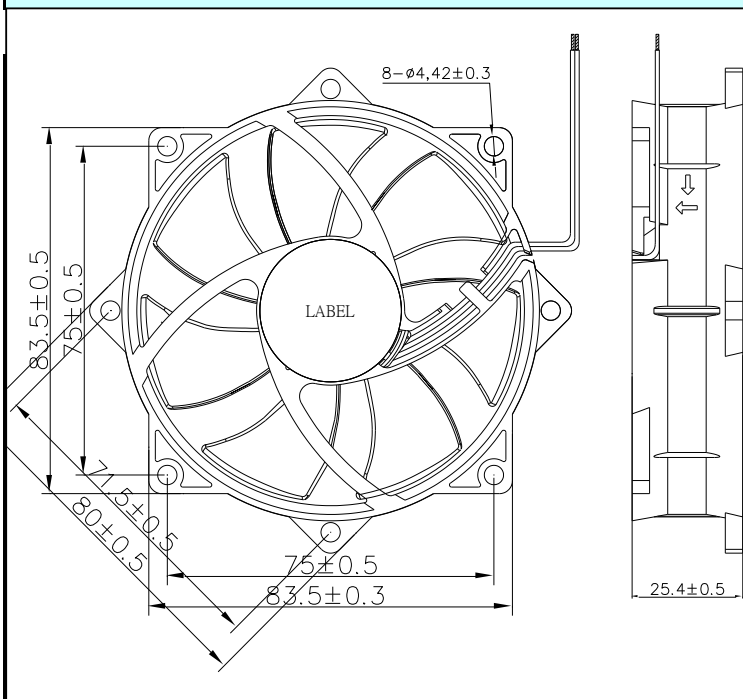

AIR FLOW-AIR PRESSURE(PERFORMANCE CURVES)

AIR PRESSURE(mmH₂O)

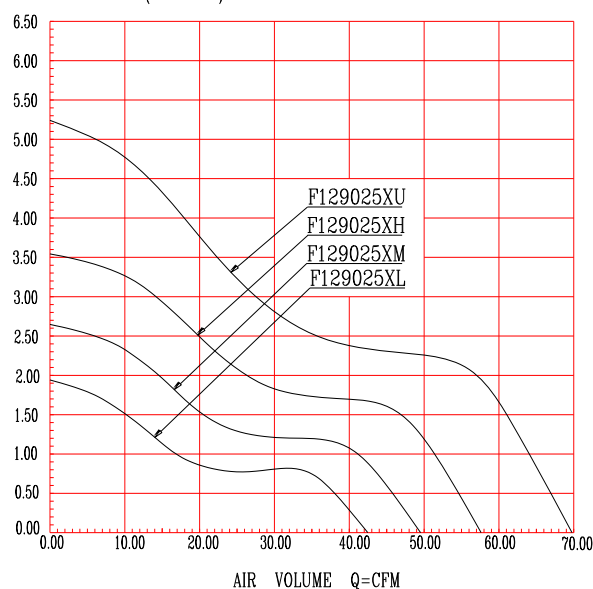

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
F129025BL	12	7~13.2	0.13	1.56	2100	42.59	1.21	1.95	26.8
F129025BM	12	7~13.2	0.18	2.16	2450	49.68	1.41	2.65	31.1
F129025BH	12	7~13.2	0.24	2.88	2850	57.80	1.63	3.58	36.5
F129025BU	12	7~13.2	0.38	4.56	3450	69.96	1.98	5.25	42.2
F129025SL	12	7~13.2	0.12	1.44	2100	42.59	1.21	1.95	26.8
F129025SM	12	7~13.2	0.18	2.16	2450	49.68	1.41	2.65	31.1
F129025SH	12	7~13.2	0.25	3.00	2850	57.80	1.63	3.58	36.5
F129025SU	12	7~13.2	0.38	4.56	3450	69.96	1.98	5.25	42.2

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

90×90×25MM SERIES

Bearing Type: Two ball bearing
EBR

Rated Voltage: 12V/24V/48V


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)


Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 89g

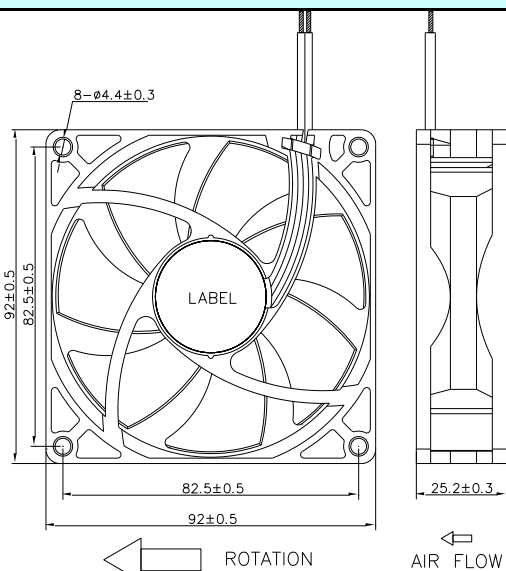

AIR FLOW-AIR PRESSURE(PERFORMANCE CURVES)
AIR PRESSURE(mmH₂O)

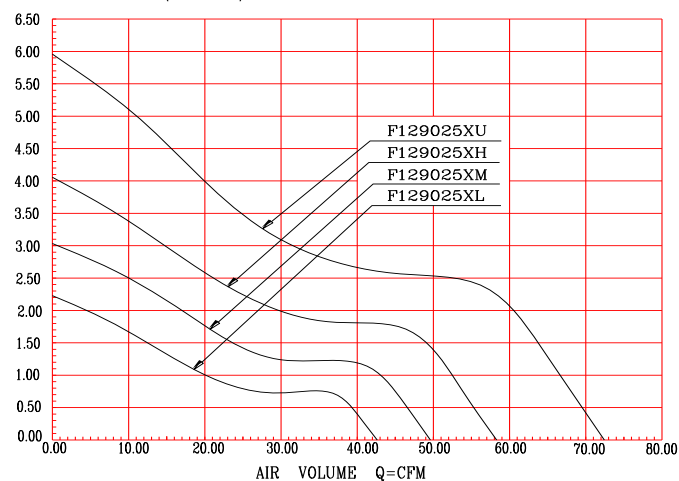

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
F129025BL	12	7~13.2	0.13	1.56	2100	42.75	1.21	2.22	26.3
F129025BM	12	7~13.2	0.18	2.16	2450	49.88	1.41	3.02	31.5
F129025BH	12	7~13.2	0.24	2.88	2850	58.02	1.64	4.08	36.0
F129025BU	12	7~13.2	0.38	4.56	3450	70.24	1.99	5.98	40.3
F129025SL	12	7~13.2	0.12	1.44	2100	42.75	1.21	2.22	26.3
F129025SM	12	7~13.2	0.18	2.16	2450	49.88	1.41	3.02	31.5
F129025SH	12	7~13.2	0.25	3.00	2850	58.02	1.64	4.08	36.0
F129025SU	12	7~13.2	0.38	4.56	3450	70.24	1.99	5.98	40.3

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

90×90×25MM SERIES

Bearing Type: Two ball bearing
EBR

Rated Voltage: 12V/24V/48V

Material : Housing Plastic (UL : 94V-0)


Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance

Operating Temp : ~10~70℃


Weight : 103g

Weight : 103g

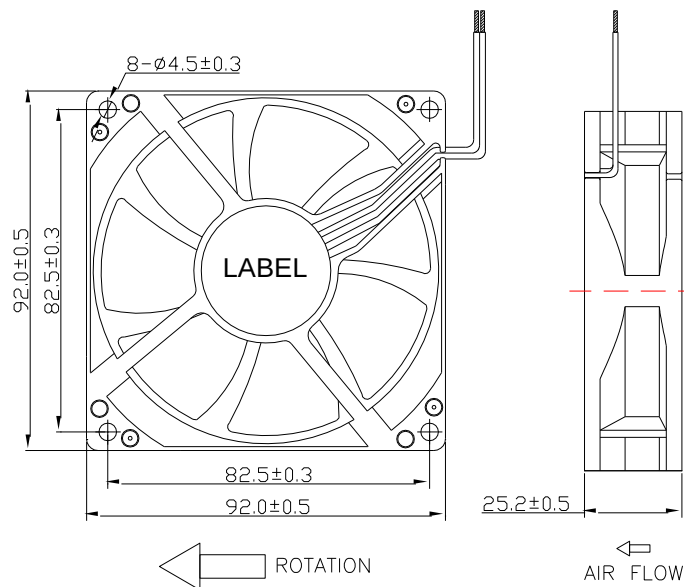

AIR FLOW-AIR PRESSURE(PERFORMANCE CURVES)

AIR PRESSURE(mmH₂O)

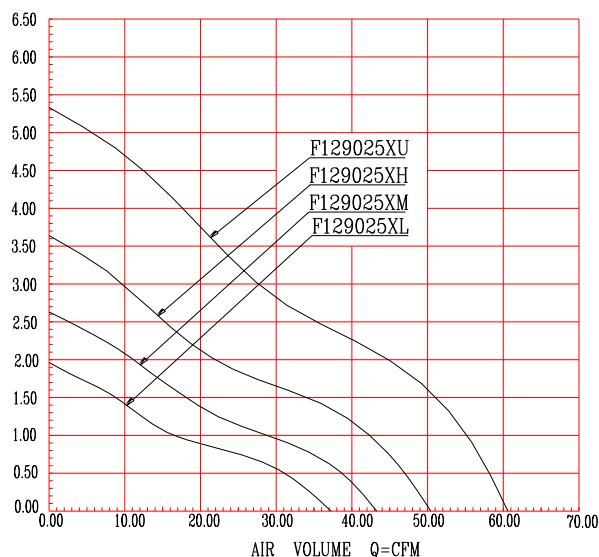

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
F129025BL	12	7~13.2	0.13	1.56	2100	37.09	1.05	1.97	25.9
F129025BM	12	7~13.2	0.18	2.16	2450	43.27	1.23	2.68	30.2
F129025BH	12	7~13.2	0.24	2.88	2850	50.34	1.43	3.63	34.6
F129025BU	12	7~13.2	0.38	4.56	3450	60.94	1.73	5.32	40.7
F129025SL	12	7~13.2	0.12	1.44	2100	37.09	1.05	1.97	25.9
F129025SM	12	7~13.2	0.18	2.16	2450	43.27	1.23	2.68	30.2
F129025SH	12	7~13.2	0.25	3.00	2850	50.34	1.43	3.63	34.6
F129025SU	12	7~13.2	0.38	4.56	3450	60.94	1.73	5.32	40.7

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

90×90×32MM SERIES

Bearing Type: Two ball bearing
EBR

Rated Voltage: 12V/24V/48V


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance


Operating Temp : ~10~70℃

Weight : 115g

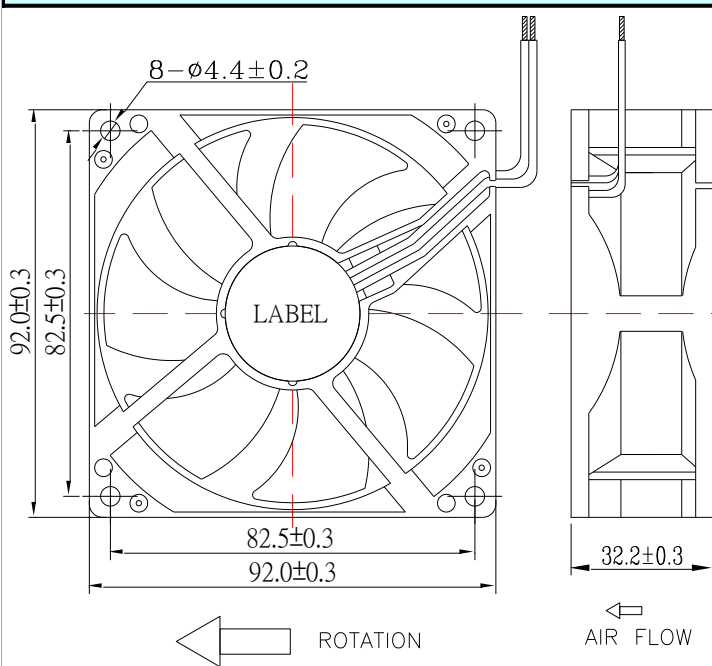

AIR FLOW-AIR PRESSURE(PERFORMANCE CURVES)

AIR PRESSURE(mmH₂O)

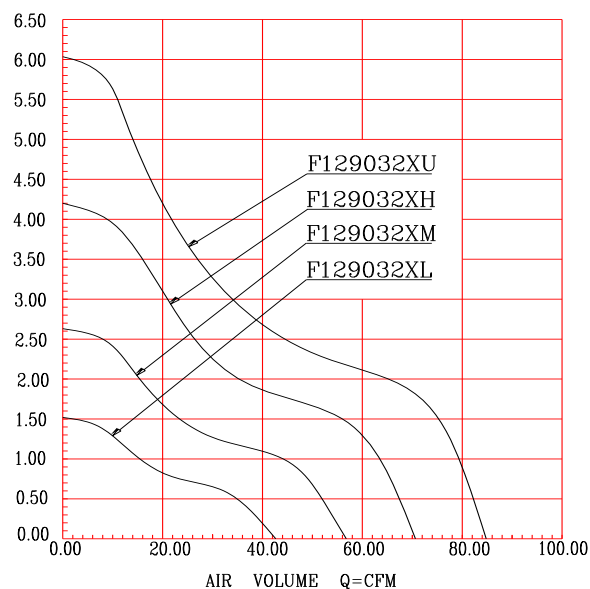

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
F129032BL	12	7~13.2	0.14	1.68	1800	42.22	1.20	1.51	26.6
F129032BM	12	7~13.2	0.20	2.40	2400	56.29	1.59	2.69	31.2
F129032BH	12	7~13.2	0.48	5.76	3000	70.36	1.99	4.20	37
F129032BU	12	7~13.2	1.00	12.00	3600	84.43	2.39	6.05	41.5
F129032SL	12	7~13.2	0.14	1.68	1800	42.22	1.20	1.51	26.6
F129032SM	12	7~13.2	0.20	2.40	2400	56.29	1.59	2.69	31.2
F129032SH	12	7~13.2	0.48	5.76	3000	70.36	1.99	4.20	37
F129032SU	12	7~13.2	1.00	12.00	3600	84.43	2.39	6.05	41.5

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

92×92×38MM SERIES

Bearing Type: Two ball bearing

Rated Voltage: 12V/24V/48V


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance


Operating Temp : ~10~70℃

Weight : 115g

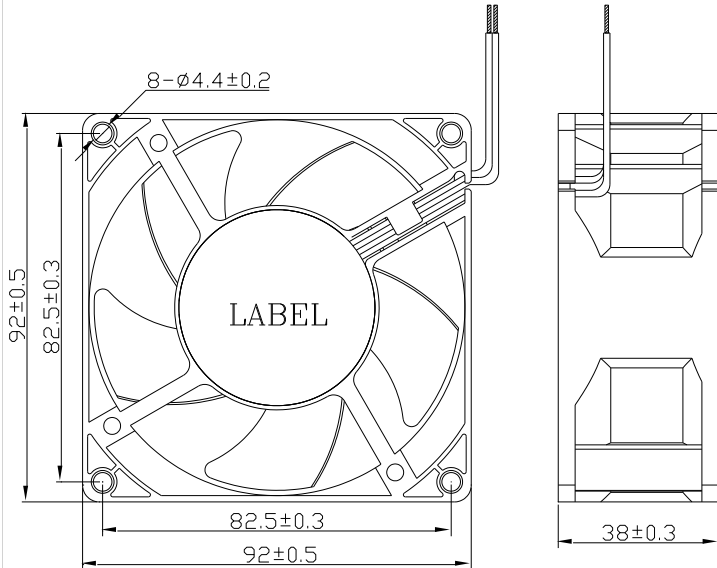

AIR FLOW-AIR PRESSURE(PERFORMANCE CURVES)

AIR PRESSURE(mmH₂O)

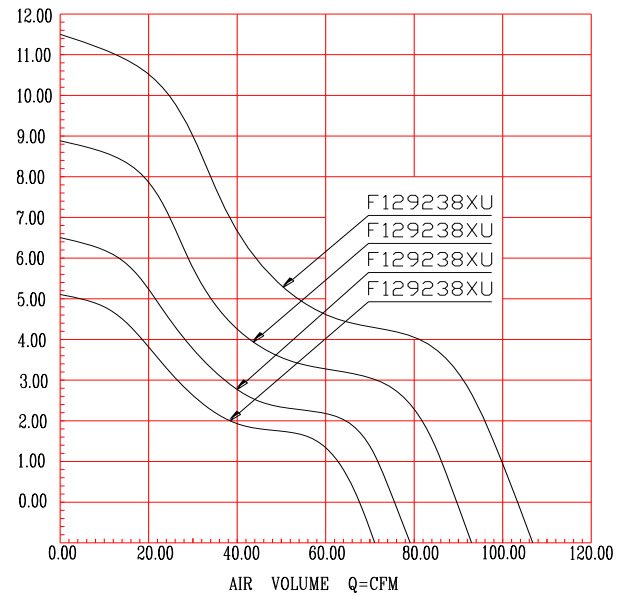

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
F129238BL	12	7~13.2	0.50	6.00	3200	70.81	2.01	5.14	45.9
F129238BM	12	7~13.2	0.70	8.40	3600	79.66	2.26	6.50	48
F129238BH	12	7~13.2	0.80	9.60	4200	92.93	2.63	8.85	51.2
F129238BU	12	7~13.2	1.20	14.40	4800	106.21	3.01	11.56	54

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

92×92×38MM SERIES

Bearing Type: Two ball bearing

Rated Voltage: 12V/24V/48V


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)


Protection : Auto-Restart /Impedance

Operating Temp : ~10~70℃

Weight : 115g

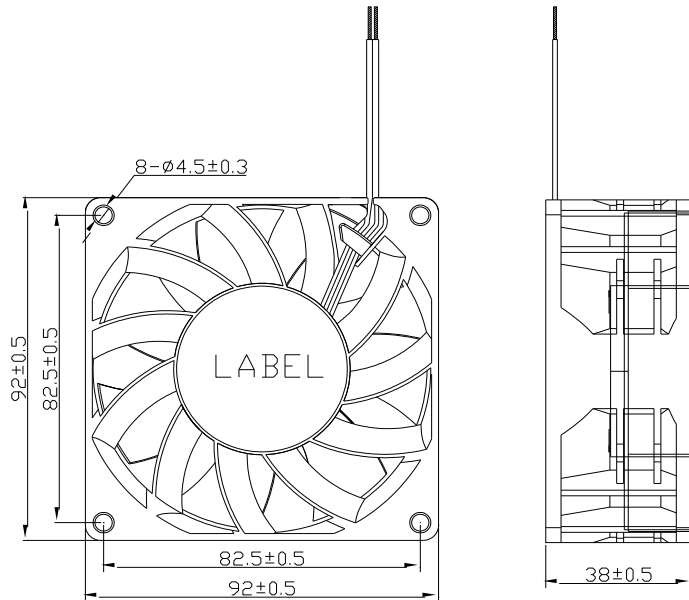

AIR FLOW-AIR PRESSURE(PERFORMANCE CURVES)
AIR PRESSURE(mmH₂O)

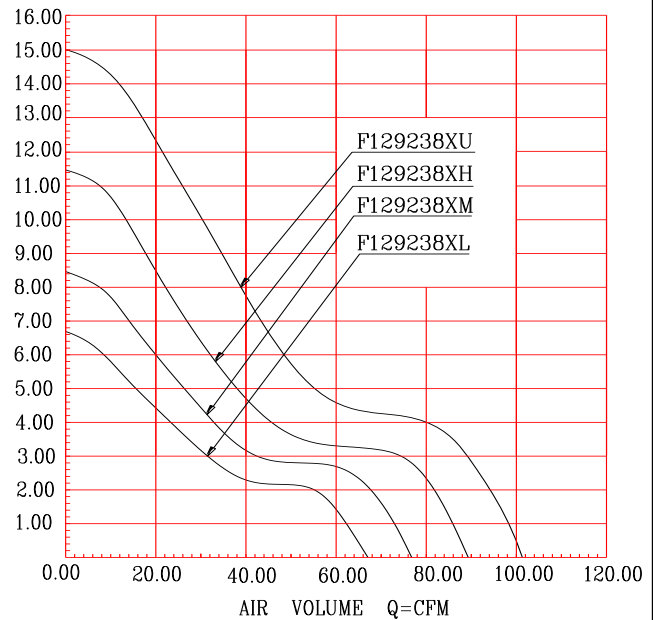

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
F129238BL	12	7~13.2	0.50	6.00	3200	67.89	1.92	6.67	42.5
F129238BM	12	7~13.2	0.70	8.40	3600	76.37	2.16	8.44	45.5
F129238BH	12	7~13.2	0.80	9.60	4200	89.10	2.52	11.48	50.5
F129238BU	12	7~13.2	1.20	14.40	4800	101.83	2.88	15.00	53.8

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

92×92×38MM SERIES

Bearing Type: Two ball bearing
EBR

Rated Voltage: 12V/24V/48V


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)


Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 115g

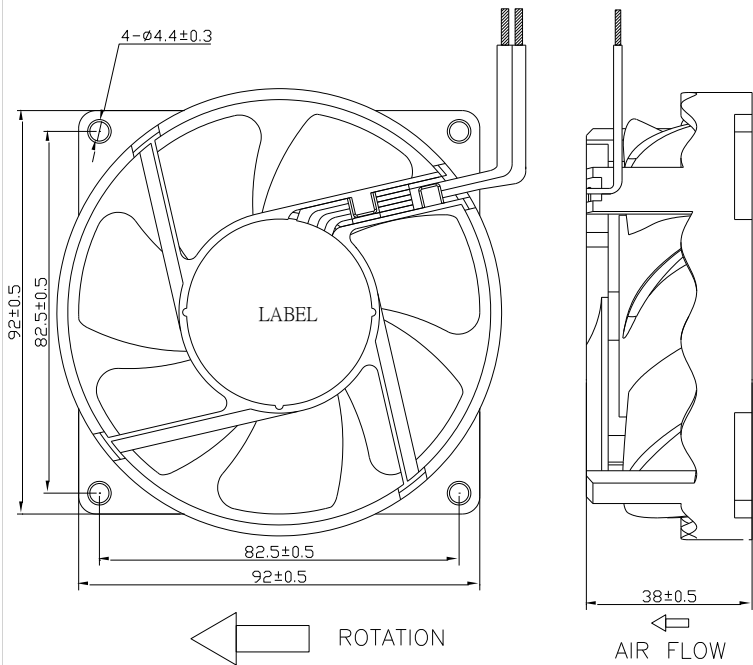

AIR FLOW-AIR PRESSURE(PERFORMANCE CURVES)
AIR PRESSURE(mmH₂O)

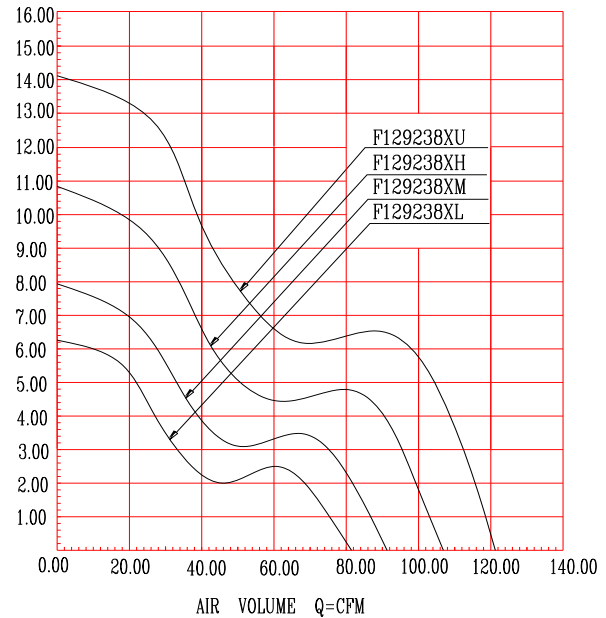

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
F129238BL	12	7~13.2	0.50	6.00	3200	81.80	2.32	6.28	43
F129238BM	12	7~13.2	0.70	8.40	3600	91.21	2.58	7.95	47.1
F129238BH	12	7~13.2	0.80	9.60	4200	106.42	3.01	10.82	52.5
F129238BU	12	7~13.2	1.20	14.40	4800	121.62	3.45	14.13	55
F129238SL	12	7~13.2	0.50	6.00	3200	81.80	2.32	6.28	43
F129238SM	12	7~13.2	0.70	8.40	3600	91.21	2.58	7.95	47.1
F129238SH	12	7~13.2	0.80	9.60	4200	106.42	3.01	10.82	52.5
F129238SU	12	7~13.2	1.20	14.40	4800	121.62	3.45	14.13	55

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

97×97×33MM SERIES

Bearing Type: Two ball bearing

Rated Voltage: 12v L.M.H.U



Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance

Operating Temp : ~10~70℃

Weight : 165g

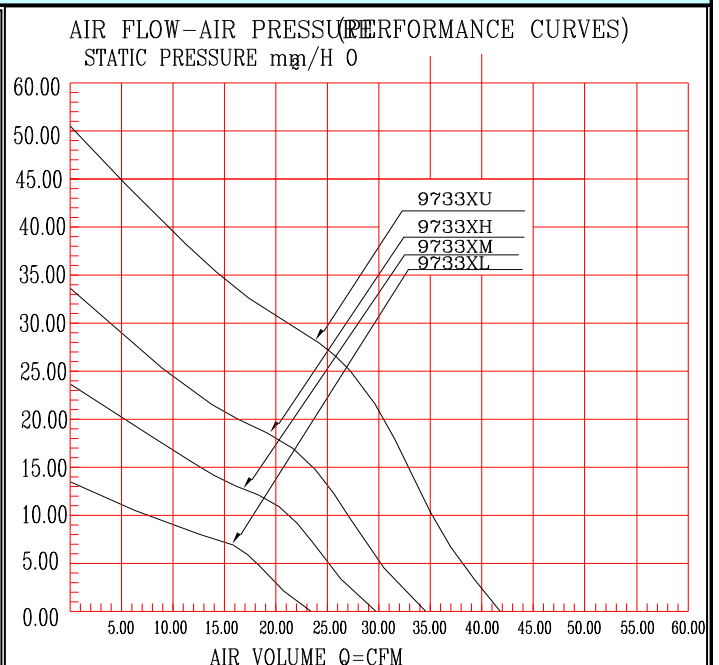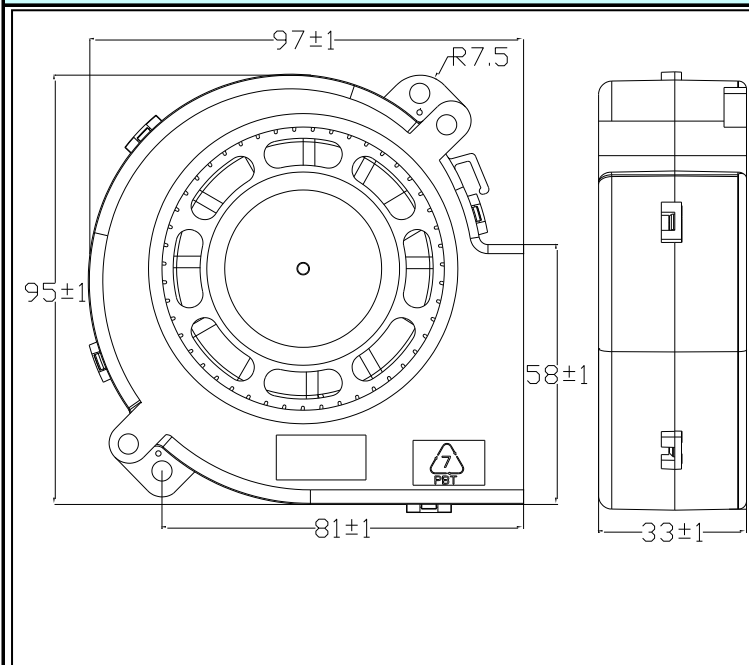

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
B129733BL	12	7~13.2	0.40	4.80	2600	23.53	0.67	13.57	46.4
B129733BM	12	7~13.2	0.45	5.40	3200	29.28	0.83	23.46	50.5
B129733BH	12	7~13.2	0.80	9.60	3800	34.58	1.01	33.67	55.3
B129733BU	12	7~13.2	1.20	14.40	4600	41.65	1.18	50.47	59.8

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

100×100×20MM SERIES

Bearing Type: Two ball bearing

EBR

Rated Voltage 5V/12V/24V


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance


Operating Temp : ~10~70°C

Weight : 66g

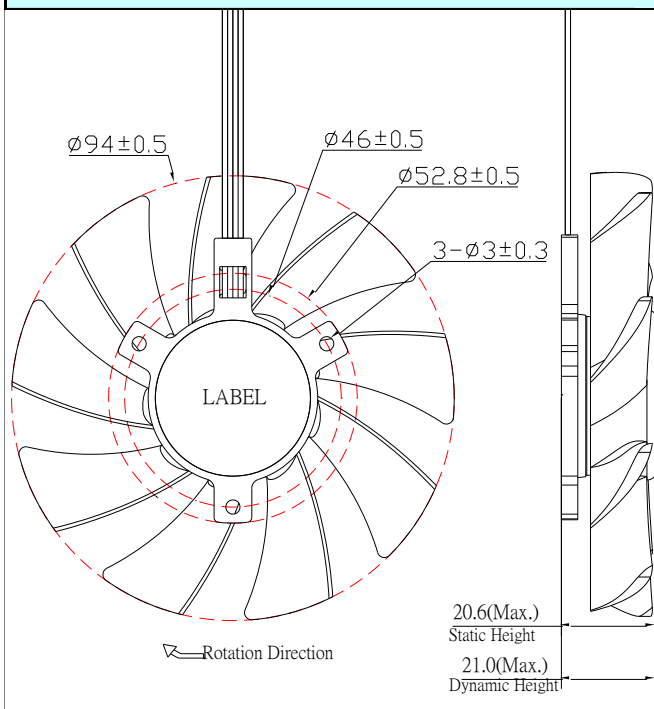

AIR PRESURE-AIR FLOW (PERFORMANCE CURVES)

AIR PRESURE(mmH₂O)

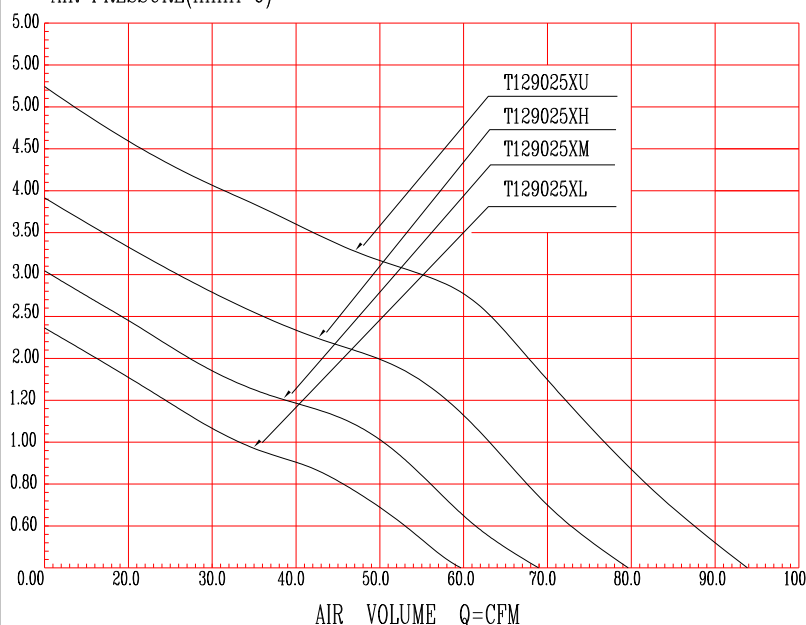

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Maximum Air Flow		Maximum Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
T129025BL	12	7~13.2	0.13	1.56	2100	59.56	1.69	2.35	35.7
T129025BM	12	7~13.2	0.18	2.16	2450	68.86	1.95	3.02	38.7
T129025BH	12	7~13.2	0.24	2.88	2850	79.61	2.26	3.91	44.3
T129025BU	12	7~13.2	0.38	4.56	3450	93.94	2.66	5.24	47.2
T129025SL	12	7~13.2	0.12	1.44	2100	59.56	1.69	2.35	35.7
T129025SM	12	7~13.2	0.18	2.16	2450	68.86	1.95	3.02	38.7
T129025SH	12	7~13.2	0.25	3.00	2850	79.61	2.26	3.91	44.3
T129025SU	12	7~13.2	0.38	4.56	3450	93.94	2.66	5.24	47.2

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

120×120×25MM SERIES

Bearing Type: Two ball bearing
EBR

Rated Voltage 12V/24V/48V


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)


Protection : Auto-Restart /Impedance

Operating Temp : ~10~70℃

Weight : 147g

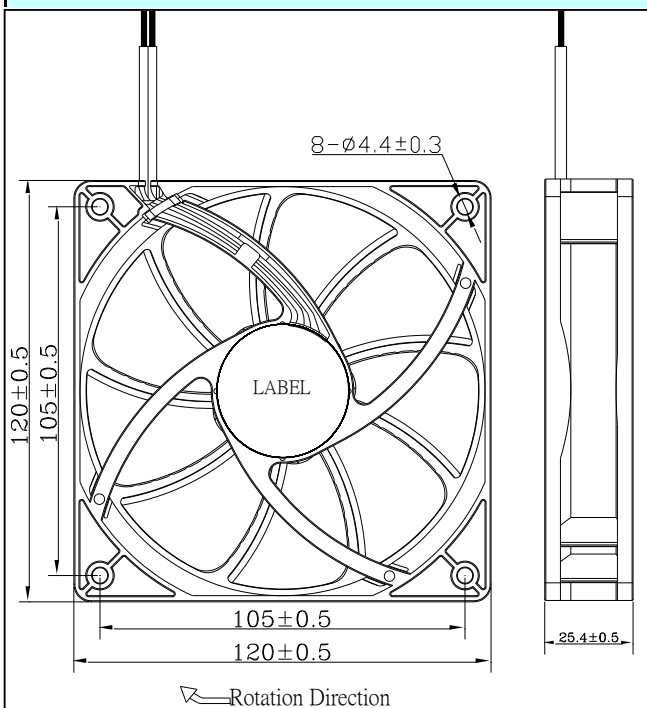

AIR PRESSURE-AIR FLOW (PERFORMANCE CURVES)
AIR PRESSURE (mmH₂O)

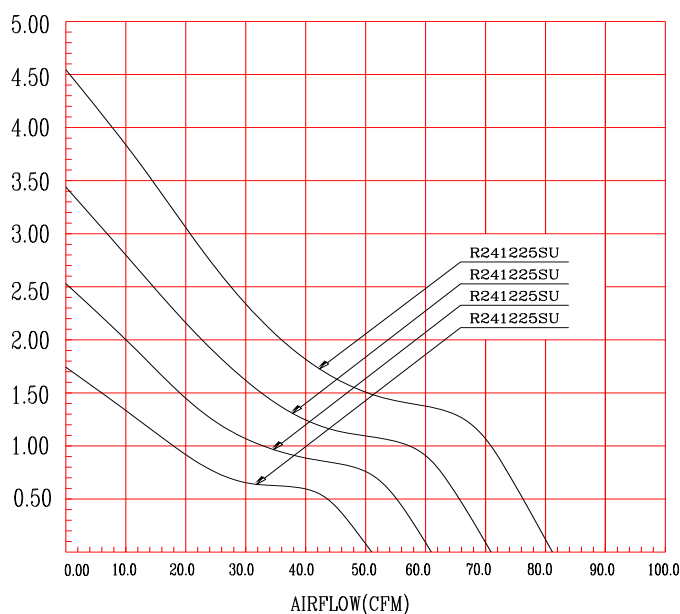

MODEL	Rated Voltage	Operating Voltage Range	Rated Current	Rated Input Power	Rated Speed	Air Flow		Static Pressure (mmH ₂ O)	Sound level
	(V)	(V)	(Amp)	(W)	(rpm)	(CFM)	m ³ /min		dB(A)
F121225*L	12	7~13.2	0.20	2.40	1500	50.40	1.43	1.76	26.2
F121225*M	12	7~13.2	0.25	3.00	1800	60.48	1.71	2.54	31.2
F121225*H	12	7~13.2	0.32	3.84	2100	70.56	2.00	3.46	36.4
F121225*U	12	7~13.2	0.40	4.80	2400	80.64	2.28	4.52	40.7

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

120×120×25MM SERIES

Bearing Type: Two ball bearing
EBR

Rated Voltage 12V/24V/48V



Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 79g

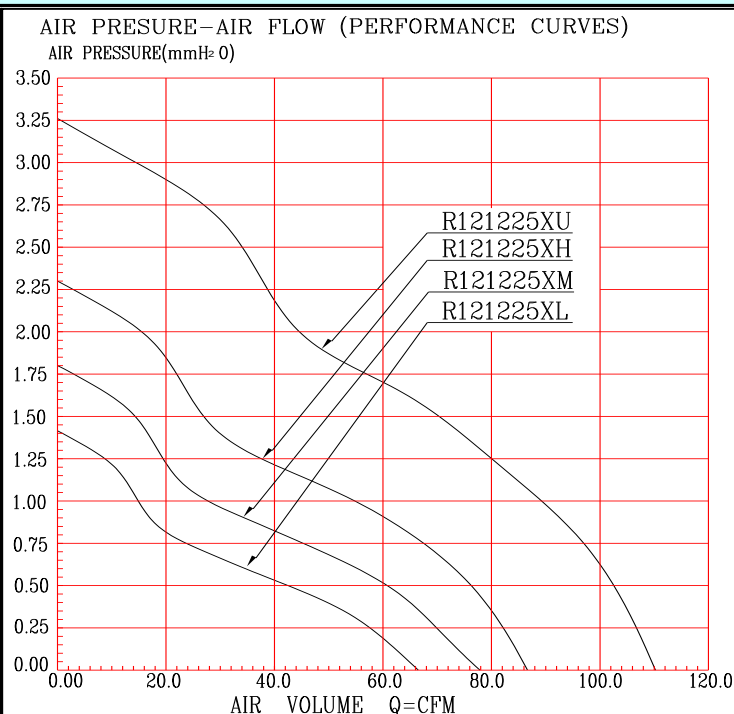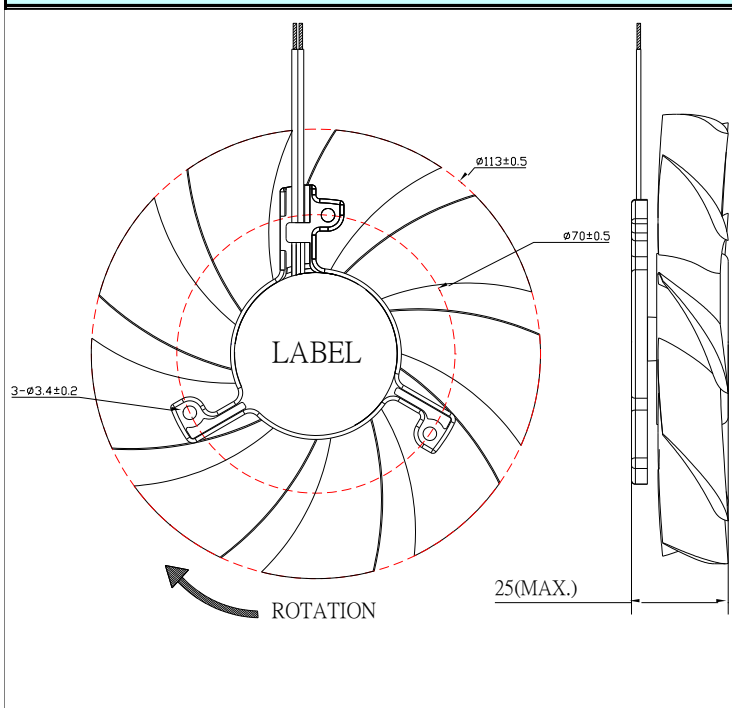

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Maximum Air Flow		Maximum Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
T121225BL	12	7~13.2	0.20	2.40	1500	66.55	1.89	1.42	30.5
T121225BM	12	7~13.2	0.25	3.00	1800	77.85	2.21	1.80	34
T121225BH	12	7~13.2	0.32	3.84	2100	86.59	2.45	2.30	37.5
T121225BU	12	7~13.2	0.40	4.80	2400	110.03	3.12	3.26	39.5
T121225SL	12	7~13.2	0.20	2.40	1500	66.55	1.89	1.42	30.5
T121225SM	12	7~13.2	0.25	3.00	1800	77.85	2.21	1.80	34
T121225SH	12	7~13.2	0.32	3.84	2100	86.59	2.45	2.30	37.5
T121225SU	12	7~13.2	0.40	4.80	2400	110.03	3.12	3.26	39.5

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

120×120×25MM SERIES

Bearing Type: Two ball bearing
EBR

Rated Voltage: 12V/24V/48V


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)


Protection : Auto-Restart /Impedance

Operating Temp : ~10~70℃

Weight : 140g

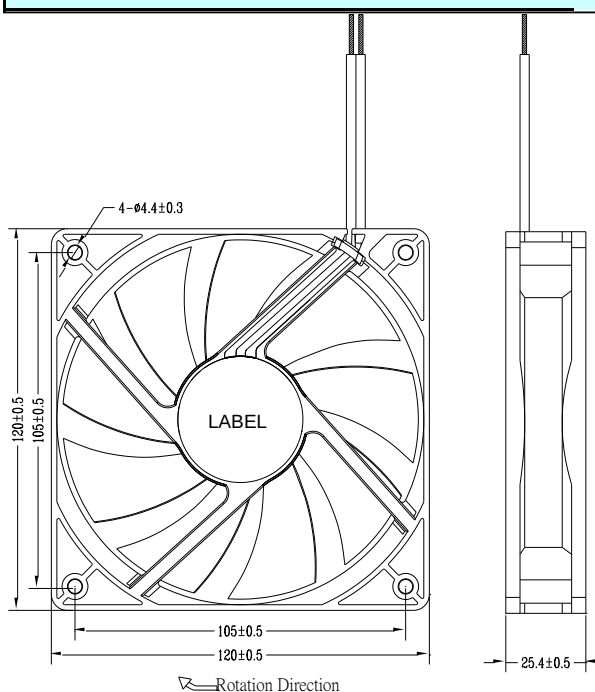

AIR PRESSURE-AIR FLOW (PERFORMANCE CURVES)
AIR PRESSURE(mmH₂O)

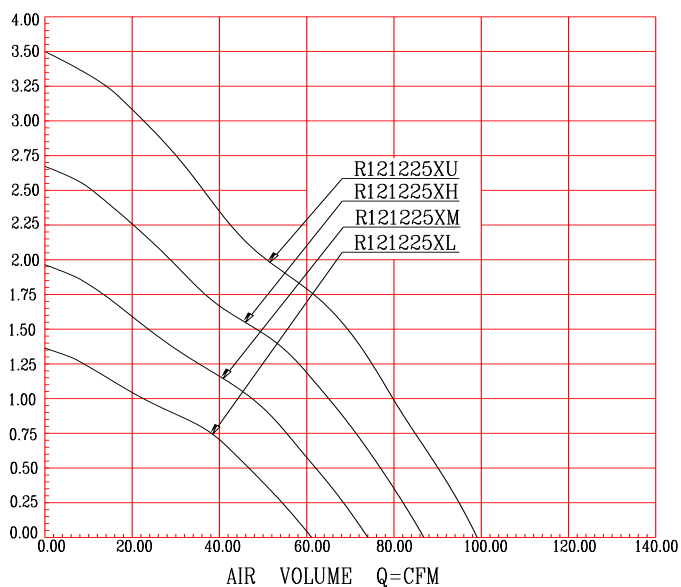

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
R121225BL	12	7~13.2	0.20	2.40	1500	61.67	1.75	1.37	30.5
R121225BM	12	7~13.2	0.25	3.00	1800	74.00	2.10	1.97	34
R121225BH	12	7~13.2	0.32	3.84	2100	86.34	2.45	2.68	37.5
R121225BU	12	7~13.2	0.40	4.80	2400	98.67	2.80	3.50	39.5
R121225SL	12	7~13.2	0.20	2.40	1500	61.67	1.75	1.37	30.5
R121225SM	12	7~13.2	0.25	3.00	1800	74.00	2.10	1.97	34
R121225SH	12	7~13.2	0.32	3.84	2100	86.34	2.45	2.68	37.5
R121225SU	12	7~13.2	0.40	4.80	2400	98.67	2.80	3.50	39.5

*Sound level measured at the distance of one meter from the axis of intake.

*Spec ifications are subject change without notice.

122×122×25MM SERIES

Bearing Type: Two ball bearing
EBR

Rated Voltage: 12V/24V/48V


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)


Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 140g

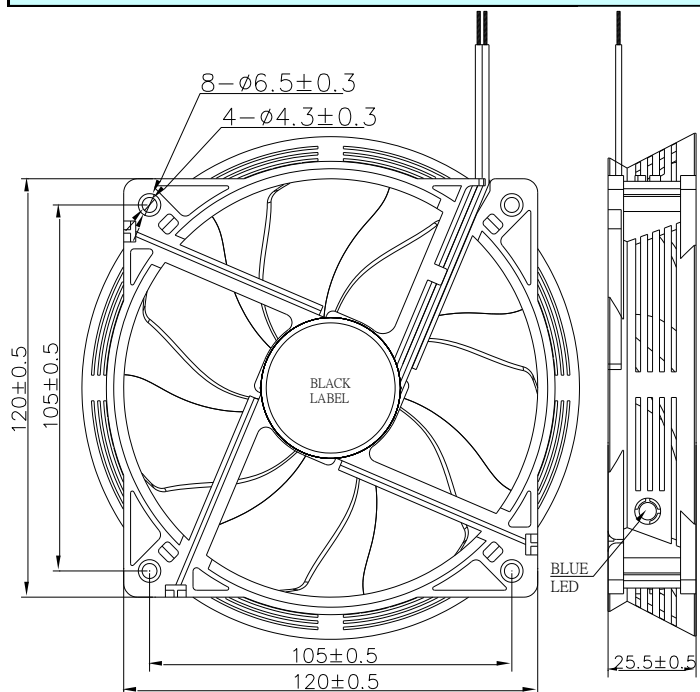

AIR FLOW-AIR PRESSURE (PERFORMANCE CURVES)
STATIC PRESSURE mm/H₂O

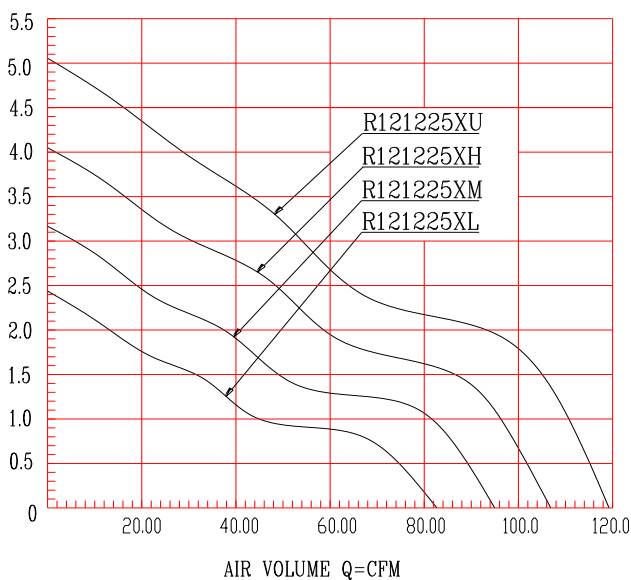

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
R121225BL	12	7~13.2	0.20	2.40	2000	82.63	2.34	2.41	40.5
R121225BM	12	7~13.2	0.25	3.00	2300	95.03	2.69	3.18	43
R121225BH	12	7~13.2	0.32	3.84	2600	107.42	3.04	4.07	46.1
R121225BU	12	7~13.2	0.40	4.80	2900	119.81	3.39	5.06	48.5
R121225SL	12	7~13.2	0.20	2.40	2000	82.63	2.34	2.41	40.5
R121225SM	12	7~13.2	0.25	3.00	2300	95.03	2.69	3.18	43
R121225SH	12	7~13.2	0.32	3.84	2600	107.42	3.04	4.07	46.1
R121225SU	12	7~13.2	0.40	4.80	2900	119.81	3.39	5.06	48.5

*Sound level measured at the distance of one meter from the axis of intake.

*Spec ifications are subject change without notice.

120×120×38MM SERIES

Bearing Type: Two ball bearing

Rated Voltage 12V/24V/48V


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)


Protection : Auto-Restart /Impedance

Operating Temp : ~10~70℃

Weight : 276g

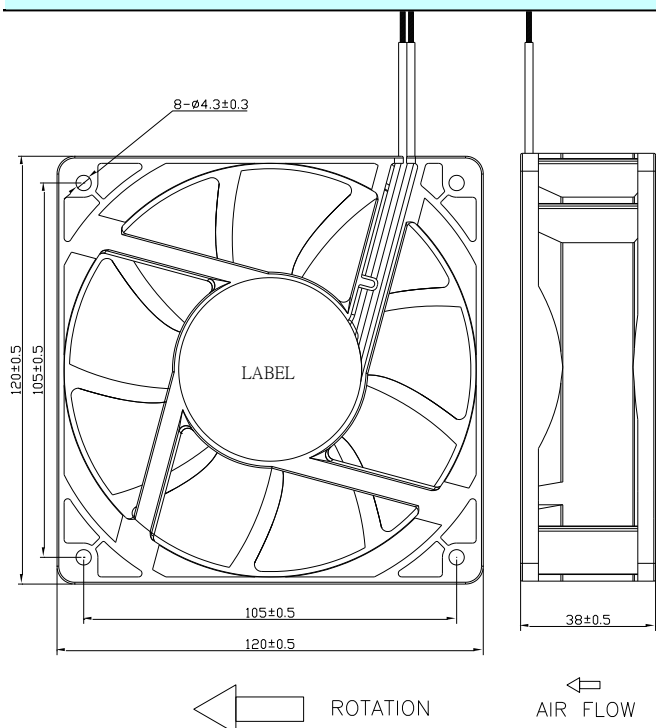

AIR FLOW-AIR PRESSURE (PERFORMANCE CURVES)
STATIC PRESSURE mm/H₂O

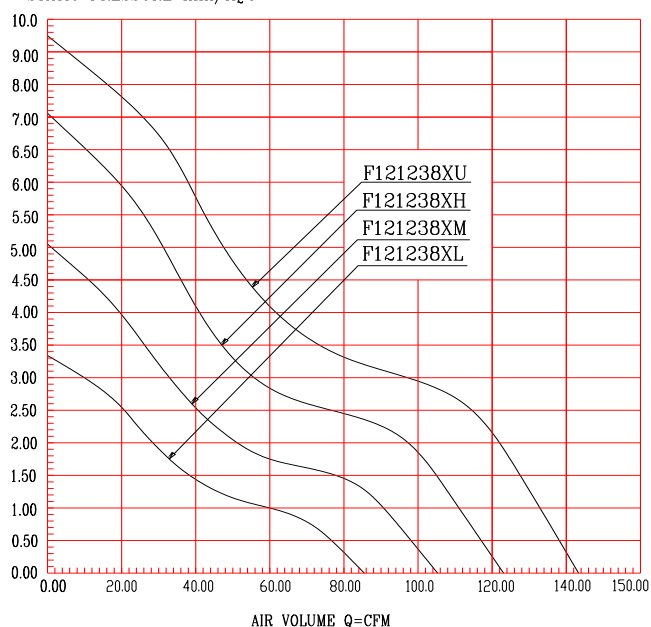

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
F121238BL	12	7~13.2	0.25	3.00	1800	85.71	2.43	3.41	30
F121238BM	12	7~13.2	0.50	6.00	2200	104.76	2.97	5.09	36.4
F121238BH	12	7~13.2	0.65	7.80	2600	123.80	3.51	7.11	43.1
F121238BU	12	7~13.2	1.00	12.00	3000	142.85	4.05	9.47	46.5
F241238BL	24	N/A	0.20	4.80	1800	84.70	2.40	3.43	32.7
F241238BU	24	N/A	1.2	28.80	3500	168.58	4.78	12.40	51.7
F481238BL	48	N/A	0.2	9.60	1800	85.09	2.41	3.44	33.2
F481238BU	48	N/A	0.8	38.40	3700	180.57	5.12	13.90	53

*Sound level measured at the distance of one meter from the axis of intake.

*Spec ifications are subject change without notice.

120×120×38MM SERIES

Bearing Type: Two ball bearing

Rated Voltage 12V/24V


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)


Protection : Auto-Restart /Impedance

Operating Temp : ~10~70℃

Weight : 325g

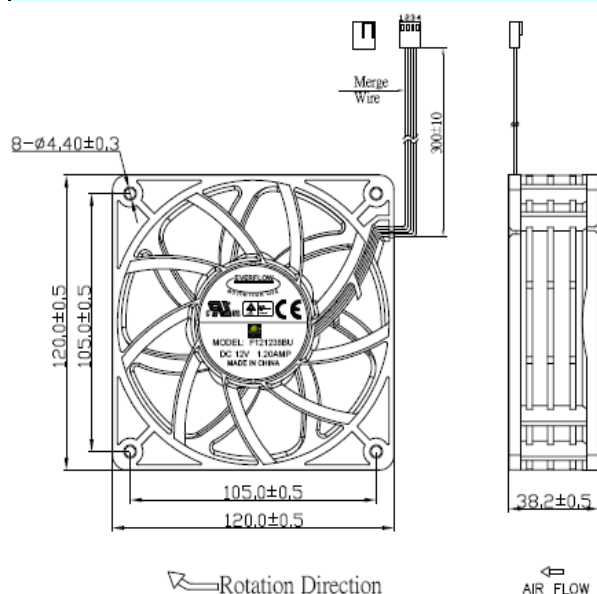

AIR FLOW-AIR PRESSURE(PERFORMANCE CURVES)

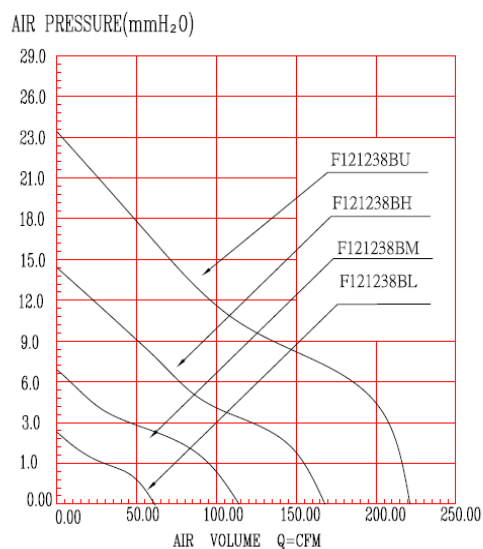

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
F121238BL	12	7~13.2	0.4	4.80	1700	60.30	1.71	2.33	30
F121238BM	12	7~13.2	0.48	5.76	3200	113.62	3.22	6.8	47
F121238BH	12	7~13.2	1.1	13.20	4700	169.10	4.80	14.49	57
F121238BU	12	7~13.2	2.3	27.60	6200	222.33	6.31	23.27	65

实做电流: 0.48A

实做电流: 1.10A

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

120×120×38MM SERIES

Bearing Type: Two ball bearing

Rated Voltage 12V/24V


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)


Protection : Auto-Restart /Impedance

Operating Temp : ~10~70℃

Weight : 340g

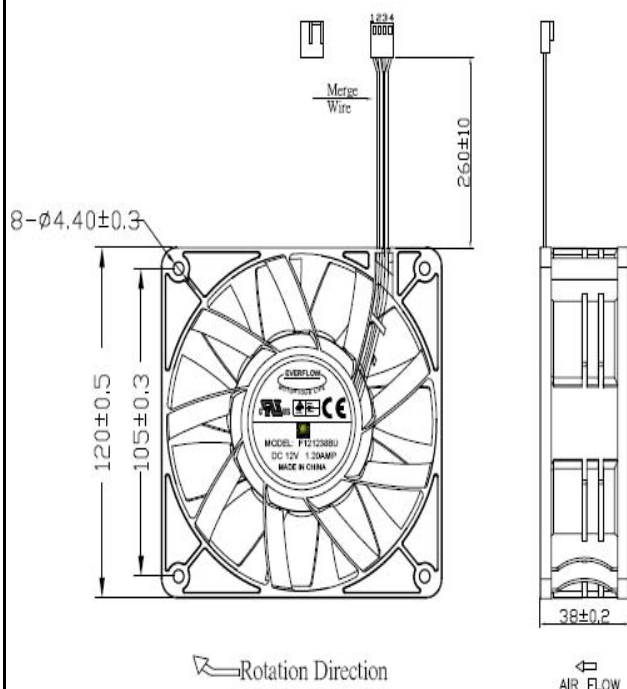

AIR FLOW-AIR PRESSURE(PERFORMANCE CURVES)

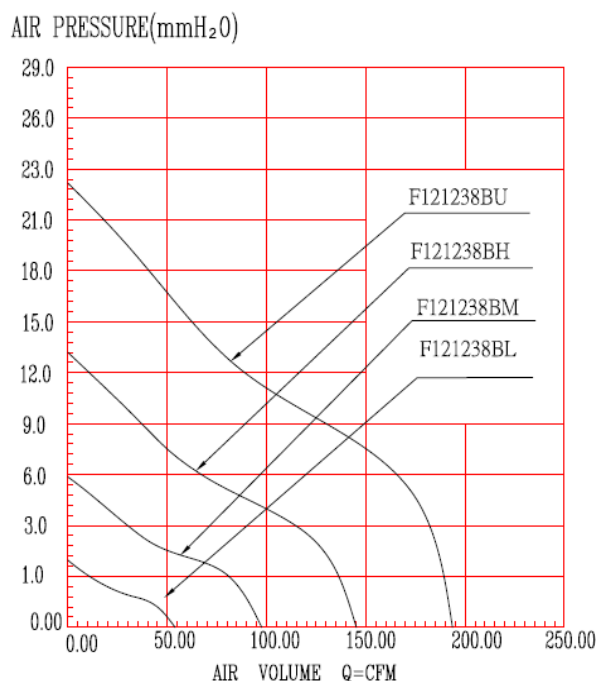

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
F121238BL	12	7~13.2	0.38	4.56	1200	53.66	1.52	1.74	29
F121238BM	12	7~13.2	0.45	5.40	2200	98.38	2.79	5.83	45
F121238BH	12	7~13.2	1.0	12.00	3200	145.90	4.14	13.24	54
F121238BU	12	7~13.2	2.5	30.00	4200	193.38	5.49	22.65	62

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

140×140×25MM SERIES

Bearing Type: Two ball bearing

Rated Voltage 12v L.M.H.U


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 147g

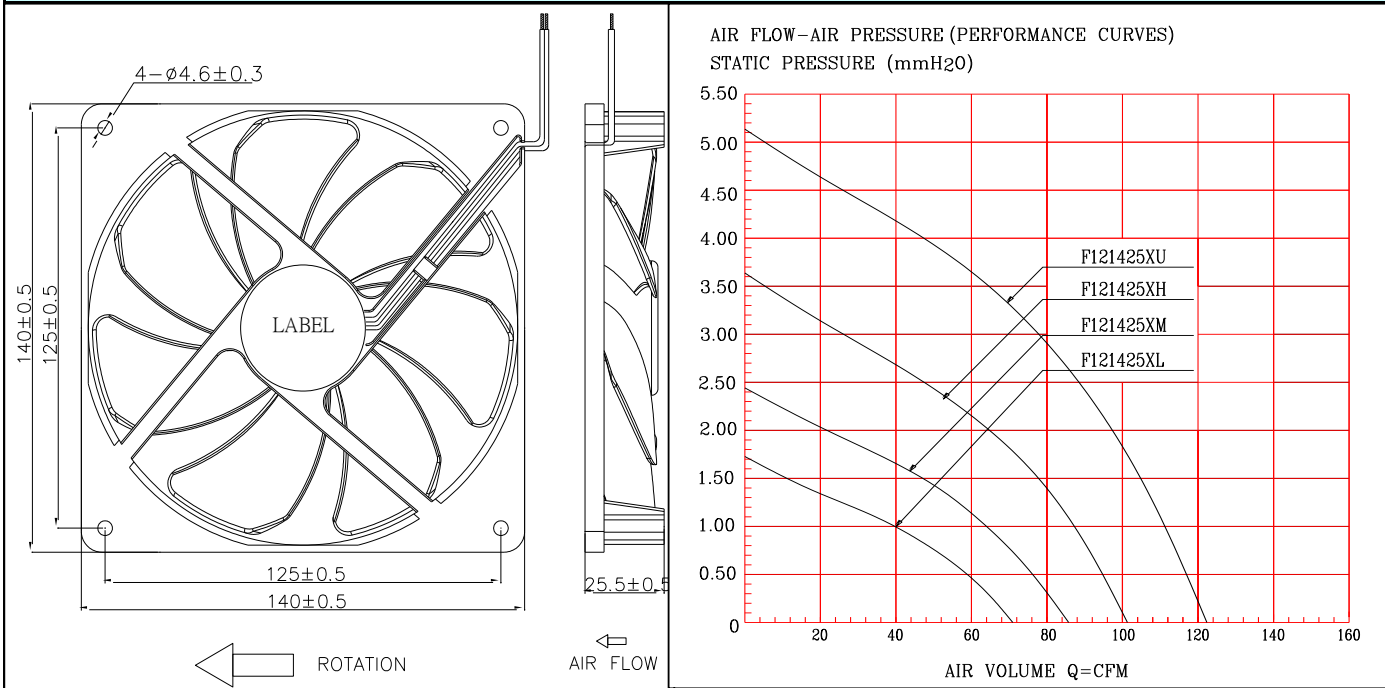

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
R121425BL	12	7~13.2	0.20	2.40	1500	70.94	2.01	1.71	26.5
R121425BM	12	7~13.2	0.35	4.20	1800	85.13	2.41	2.46	33.1
R121425BH	12	7~13.2	0.60	7.20	2200	104.05	2.95	3.68	39.2
R121425BU	12	7~13.2	1.10	13.20	2600	122.97	3.48	5.14	43.3

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

140×140×25MM SERIES

Bearing Type: Two ball bearing
EBR

Rated Voltage 12v L.M.H.U


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)


Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 147g

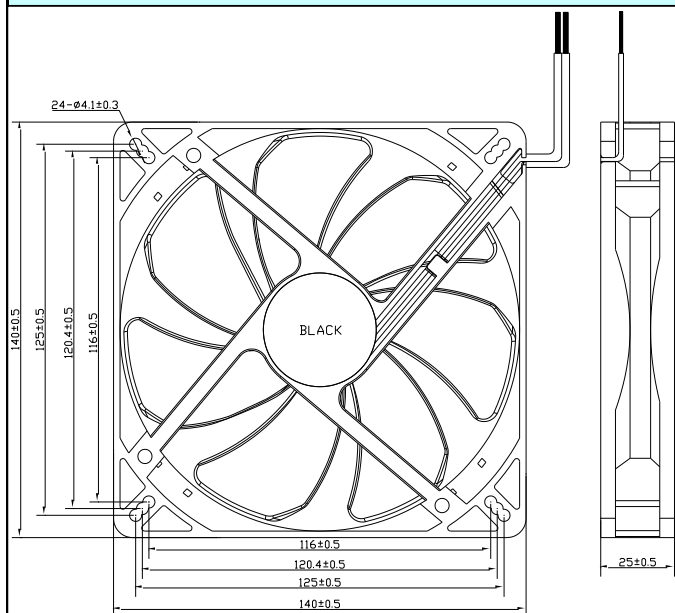

AIR FLOW-AIR PRESSURE (PERFORMANCE CURVES)
STATIC PRESSURE (mmH₂O)

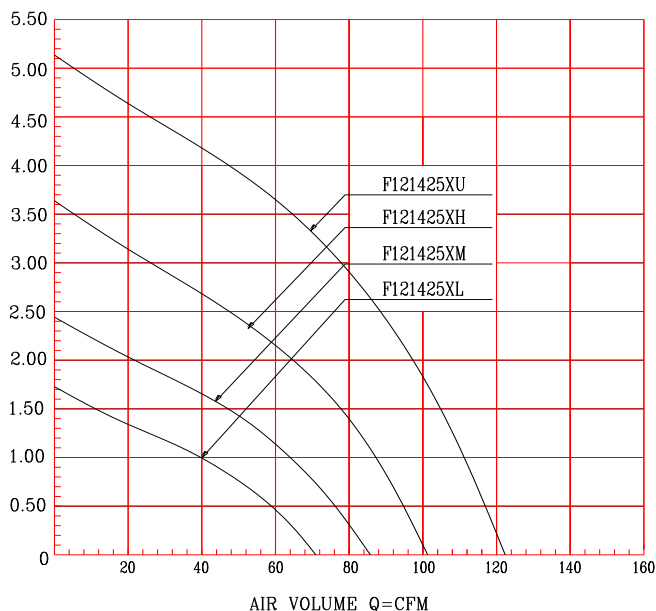

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
F121425BL	12	7~13.2	0.20	2.40	1500	70.94	2.01	1.71	26.5
F121425BM	12	7~13.2	0.35	4.20	1800	85.13	2.41	2.46	33.1
F121425BH	12	7~13.2	0.60	7.20	2200	104.05	2.95	3.68	39.2
F121425BU	12	7~13.2	1.10	13.20	2600	122.97	3.48	5.14	43.3
F121425SL	12	7~13.2	0.20	2.40	1500	70.94	2.01	1.71	26.5
F121425SM	12	7~13.2	0.35	4.20	1800	85.13	2.41	2.46	33.1
F121425SH	12	7~13.2	0.60	7.20	2200	104.05	2.95	3.68	39.2
F121425SU	12	7~13.2	1.10	13.20	2600	122.97	3.48	5.14	43.3

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

180×180×17MM SERIES

Bearing Type: EBR

Rated Voltage 5v L.M.H.U



Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance

Operating Temp : ~10~70℃

Weight : 131g

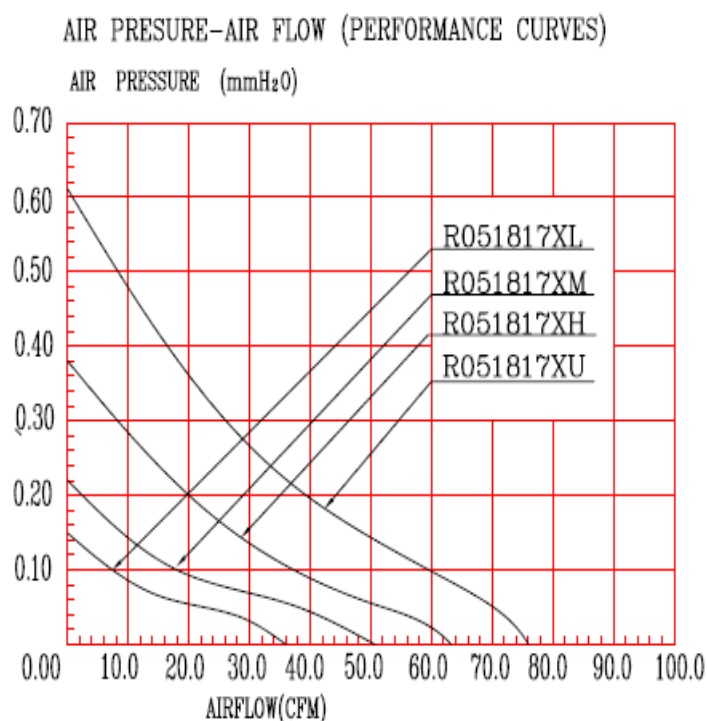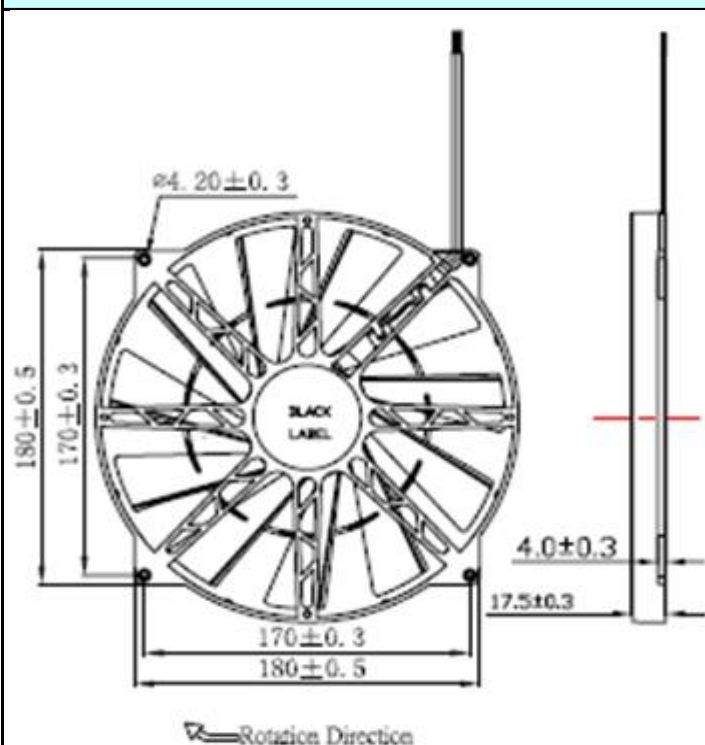

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
R051817SL	5	2.5~5.5	0.22	1.10	600	37.93	1.07	0.15	22.8
R051817SM	5	2.5~5.5	0.24	1.20	800	50.57	1.43	0.27	29
R051817SH	5	2.5~5.5	0.26	1.30	1000	63.21	1.79	0.38	33.8
R051817SU	5	2.5~5.5	0.30	1.50	1200	75.86	2.15	0.61	37.8

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

勝特力電材超市-龍山店 886-3-5773766
勝特力電材超市-光復店 886-3-5729570
勝特力電子(上海) 86-21-34970699
勝特力電子(深圳) 86-755-83298787
<http://www.100y.com.tw>