


SPECIFICATIONS

FULLTECH ELECTRIC CO.,LTD

ITEM	MODEL	RF-190APA23H1C2A
RATED VOLTAGE		AC230V
VOLTAGE RANGE		AC207-253V
SPEED(RPM)		50Hz 2500 RPM±10% 60Hz 2700 RPM±10%
RATED CURRENT		50Hz 0.23 A±10% 60Hz 0.30 A±10%
RATED INPUT		50Hz 57 W±10% 60Hz 72 W±10%
LOCKED CURRENT		50Hz 0.43 A±10% 60Hz 0.45 A±10%
MAX. AIR VOLUME		50Hz 335 ±10% CFM 60Hz 370 ±10% CFM
MAX. STATIC PRESSURE		50Hz 1.0 ±10% inH2O 60Hz 1.2 ±10% inH2O
OPERATING TEMP.		-20°C ~ + 60°C
MAX. OPERATING HUMIDITY		85%
STORAGE TEMP.		-40°C ~ + 60°C
ROTATING DIRECTION		CLOCKWISE DIRECTION
INSULATION RESISTANCE		DC 500 V 100MΩ
DIELECTRIC STRENGTH		AC 1500V / 1MIN
NOISE		50Hz 60 dB ±10% 60Hz 62 dB ±10%
SAFETY PROTECTION		THERMAL PROTECTION
INSULATION GRADE		CLASS B
BEARING		BALL BEARING
LIFE EXPECTANCY		OVER 40000 HOURS (40°C)
IMPELLER		PLASTIC PA COVERING GLASS FIBER
HOUSING		PLASTIC PC/ABS
CAPACITOR		2uF/450V
DIMENSION		320*320*100 mm dia
WEIGHT		2.35 KG.

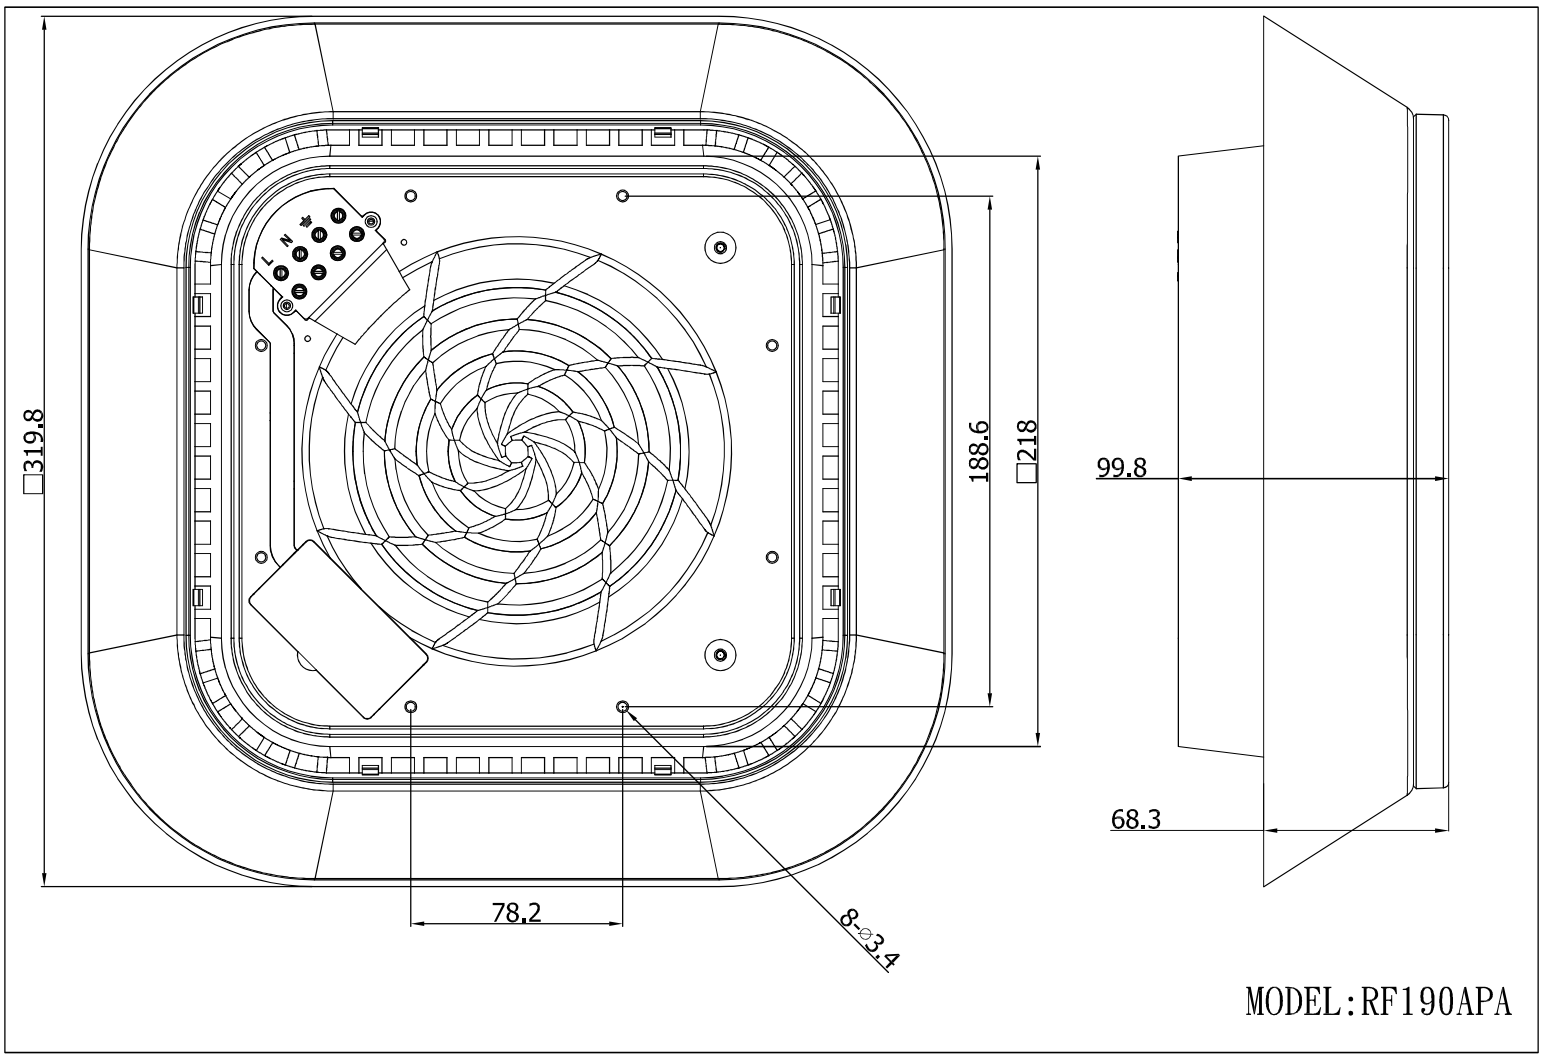

MODEL: RF190APA