
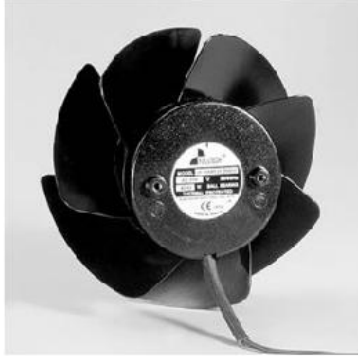


UF15K(ME) Series


Size: $\phi 136 \times 58$
Unit: mm

*Metal Impeller

 Download PDF



Thermally-Protected

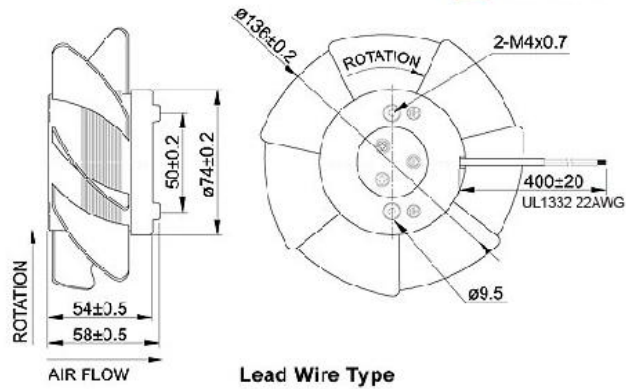

Lead Wire Type

Model	U15KME11-H
Rated Voltage	115 V
Frequency	50 / 60 Hz
Input Power	42 / 42 W
Rated Current	0.51 / 0.46 A
Locked Current	0.87 / 0.74 A
Speed	2800 / 3250 RPM
Maximum Air Flow	5.5 / 6.5 m ³ /min.
Maximum Air Flow	195 / 230 CFM
Maximum Pressure	14 / 16 mmH ₂ O
Maximum Pressure	0.55 / 0.63 InchH ₂ O
Noise	45 / 50 dB
Weights	0.91 kg

Model	UF15KME23-H
Rated Voltage	230 V
Frequency	50 / 60 Hz
Input Power	42 / 42 W
Rated Current	0.25 / 0.23 A
Locked Current	0.43 / 0.37 A
Speed	2800 / 3250 RPM
Maximum Air Flow	5.5 / 6.5 m ³ /min.
Maximum Air Flow	195 / 230 CFM
Maximum Pressure	14 / 16 mmH ₂ O
Maximum Pressure	0.55 / 0.63 InchH ₂ O
Noise	45 / 50 dB
Weights	0.91 kg

