




172X150X51mm




General Specifications

| | |
|------------|--|
| Airflow | 106~235CFM |
| Housing | Die Cast Aluminum Painted Black Or Natural Color |
| Impeller | Plastic With Fiber Glass Filled UI 94V-0 |
| Motor Type | Shaded Pole, Impedance Protected |
| Connecting | Terminal & Wire Leads |

Dimensions:mm

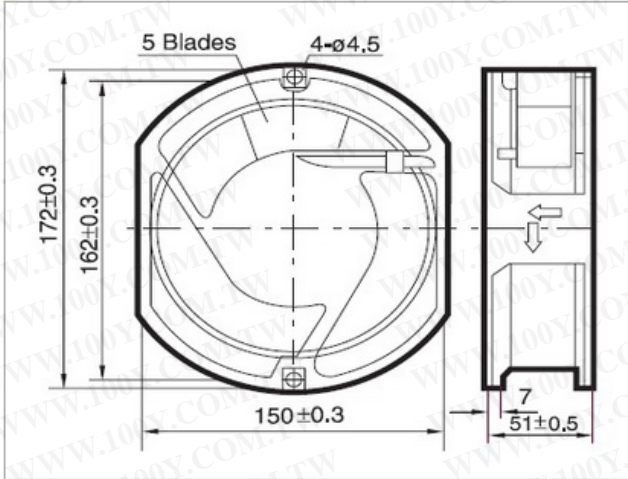

Performance

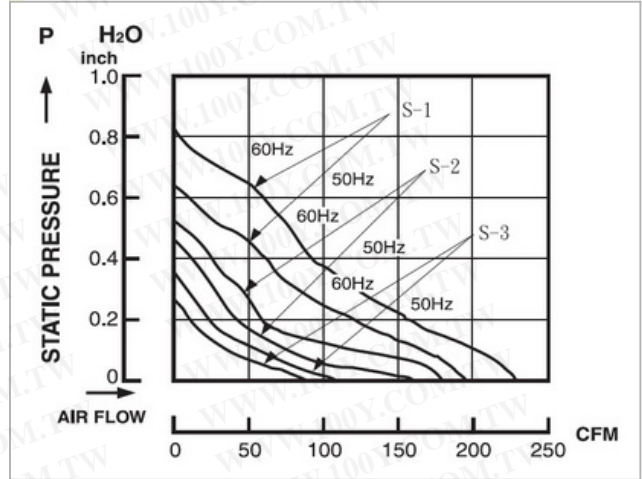

Specifications

| Model NO. | Bearing | Rated Voltage | Frequency | Speed | Airflow | Static Pressure | Current | Power | Noise |
|-------------|---------|---------------|-----------|-----------|---------|-----------------|-----------|-------|-------|
| | | VAC | HZ | | | RPM | | | |
| 6C115ABSL | 2BALL | 110/120 | 50/60 | 2800/3100 | 190/235 | 0.63/0.79 | 0.50/0.45 | 38/35 | 50/45 |
| 6C115ABST | 2BALL | 110/120 | 50/60 | 2800/3100 | 190/235 | 0.63/0.79 | 0.50/0.45 | 38/35 | 50/45 |
| 6C230ABSL | 2BALL | 220/240 | 50/60 | 2800/3100 | 190/235 | 0.63/0.79 | 0.23/0.21 | 32/31 | 50/45 |
| 6C230ABST | 2BALL | 220/240 | 50/60 | 2800/3100 | 190/235 | 0.63/0.79 | 0.23/0.21 | 32/31 | 50/45 |
| 6C115ABSL-L | 2BALL | 110/120 | 50/60 | 2100/1900 | 110/106 | 0.40/0.31 | 0.35/0.33 | 22/21 | 33/30 |
| 6C230ABSL-L | 2BALL | 220/240 | 50/60 | 1900/1800 | 110/106 | 0.40/0.31 | 0.15/0.12 | 22/19 | 33/30 |

P1-1

www.gulf.com.tw TEL:+886-7-5219966 E-MAIL:service@gulf.com.tw

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)