

SPECIFICATIONS


(RoHS Compliant)



Model Number: MR2B3
Part Number: 19028245A

Version: 01
Dec 19, 2017

Mechanical Drawing:

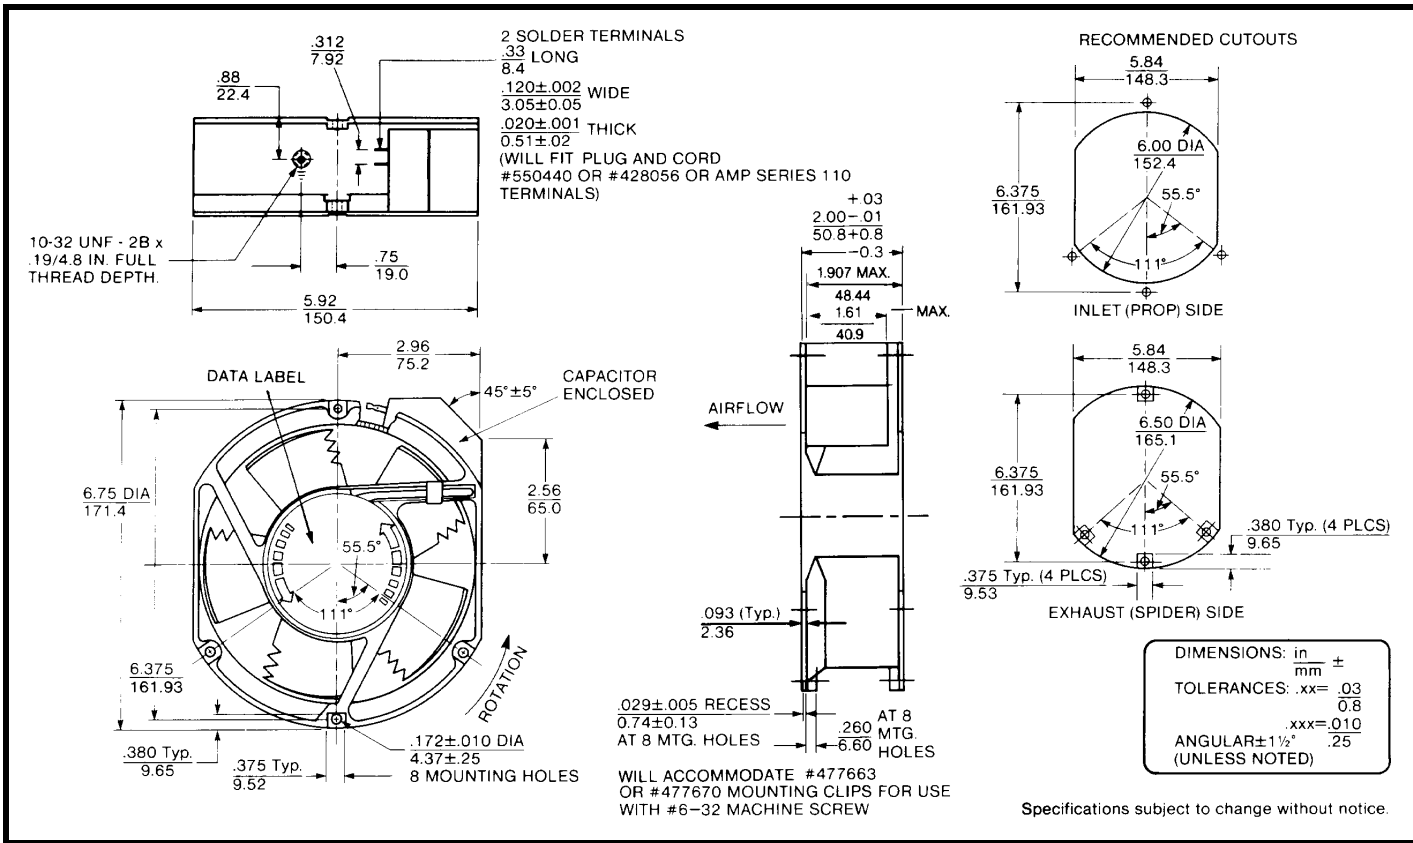

Motor:

Nominal Voltage = 115 VAC
 Frequency = 50 / 60 Hz
 Nominal Running Current = 0.27 / 0.26 amps
 Max. Locked Rotor Current = 0.48 / 0.47 amps
 Running Power = 30 / 31 watts
 Average Speed = 2850 / 3350 RPM
 Bearings = Ball
 Air Flow = 200 / 235 CFM
 Acoustic = 52.2 / 55.8 dBA

Construction:

Venturi: Single Piece Die Cast Aluminum, Black.
 Propeller: Plastic, Black, UL 94V-0

Life Expectancy:

This fan is designed for continuous duty life of 62,000 hours at 40°C.

Additional Features:

Permanent Split Capacitor Motor
 Thermal Protection
 Automatic Restart
 Impedance protected
 Operating Temperature: -10°C to 70°C
 Storage Temperature: -40°C to 85°C

Agency Approvals:

UL, CUL, CE

Additional Features:

2x0.120" Terminals

勝特力材料 886-3-5773766
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

PQ Curve:

