


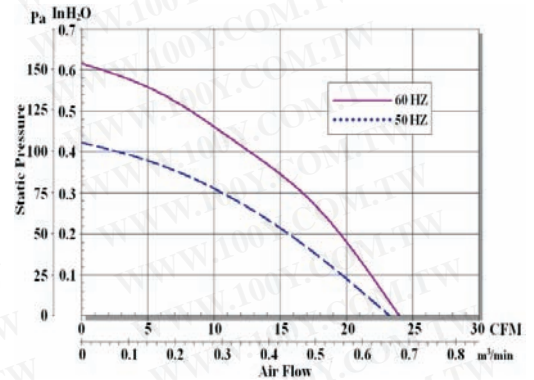
121x121x37mm

BA12C37T Series


AC Blower

Specification:

- **Air Flow** : 22 ~ 23 CFM
- **Housing** : Spiral Housing of Fiberglass-Reinforced Polycarbonate
Housing Base of Galvanized Steel Plate
- **Impeller** : Fiberglass-Reinforced Polycarbonate
- **Bearing** : Ball or Sleeve
- **Termination** : Lead Wire
- **Operating Voltage Range** : 85VAC to 125VAC for 115V Type
185VAC to 245 VAC for 230V Type
- **Insulation** : Class "B" or "F"
- **Safety** : Impedance Protected
- **Operating Temperature** : -10°C to + 70°C for Sleeve Type
-20°C to + 80°C for Ball Type
- **Weight** : 625g
- **Approval** : 



Outline Dimension

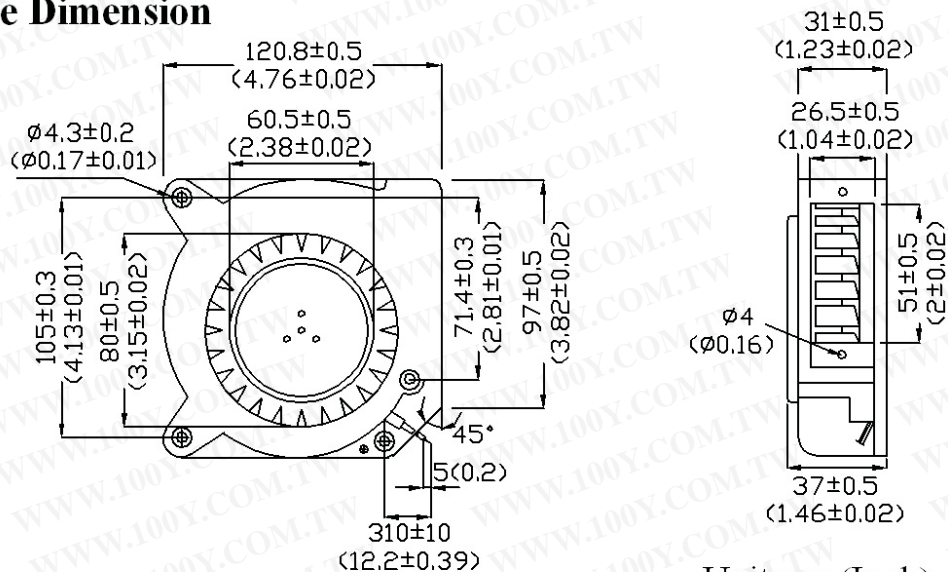

Unit:mm(Inch)

Item Code	Rated Voltage	Frequency (Hz)	Rated Current (A)	Input Power (W)	Max. Air Flow		Noise dB(A)
					CFM	m³/min	
BA1V12C37T-2	115V	50/60	0.27/0.24	21/19	22/23	0.64/0.68	53/54
BA2V12C37T-2	230V	50/60	0.14/0.12	21/20	22/23	0.64/0.68	53/54

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)