

勝特力電材超市-龍山店 886-3-5773766  
 勝特力電材超市-光復店 886-3-5729570  
 勝特力电子(上海) 86-21-34970699  
 勝特力电子(深圳) 86-755-83298787  
<http://www.100y.com.tw>



品牌名称:	建准风扇	产品型号:	EE92251B1-000C-A99
串 压:	12 V	转 速:	3000 R.P.M.
功 率:	2 W	噪 音:	34 dB-A
轴 承:	滚珠	尺 寸:	92*92*25 mm
风 量:	51.5 CFM	重 量:	94 g


## 产品规格书

### 3. PERFORMANCE CHARACTERISTIC


<b>RATED SPEED</b>	3000 RPM $\pm$ 10% at rated voltage
<b>AIR FLOW</b>	51.5 CFM
<b>STATIC PRESSURE</b>	0.15 Inch-H <sub>2</sub> O
<b>ACOUSTIC NOISE</b>	34 dB(A)
<b>AIR FLOW V.S. PRESSURE</b>	See Page 5
<b>INSULATION CLASS</b>	UL Class A
<b>INSULATION RESISTANCE PLASTIC HOUSING</b>	10M ohm at 500 VDC between internal stator and lead wire (+)
<b>DIELECTRIC STRENGTH</b>	Applied AC 500 V for one minute or AC 600 V for 2 Seconds between housing and lead wire (+)
<b>LIFE EXPECTANCY</b>	70,000 Hours at 40 deg. C, 65% humidity, 90% CL.
<b>PROTECTION</b>	<input checked="" type="checkbox"/> <b>Automatic Restart</b> Note: In a situation where the fan is locked by an external force while the electricity is on, an increase in coil temperature will be prevented by temporarily turning off the electrical power to the motor. The fan will automatically restart when the locked rotor condition is released.
	<input type="checkbox"/> <b>Polarity Protection</b>

# PERFORMANCE CURVES

## STATIC PRESSURE

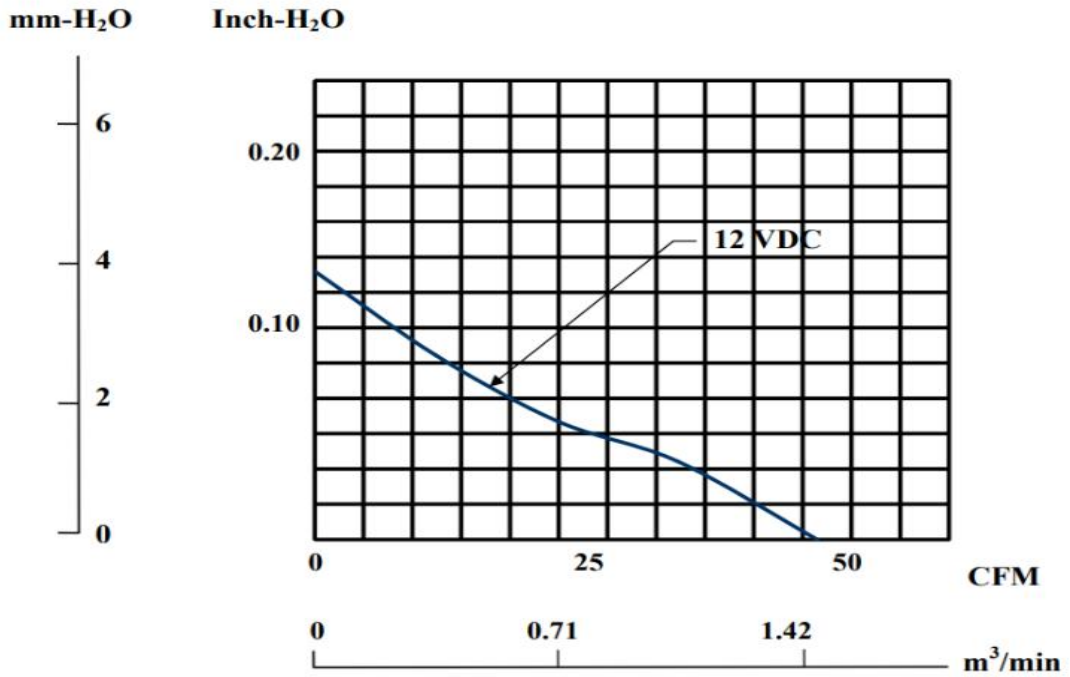

## DIMENSIONS

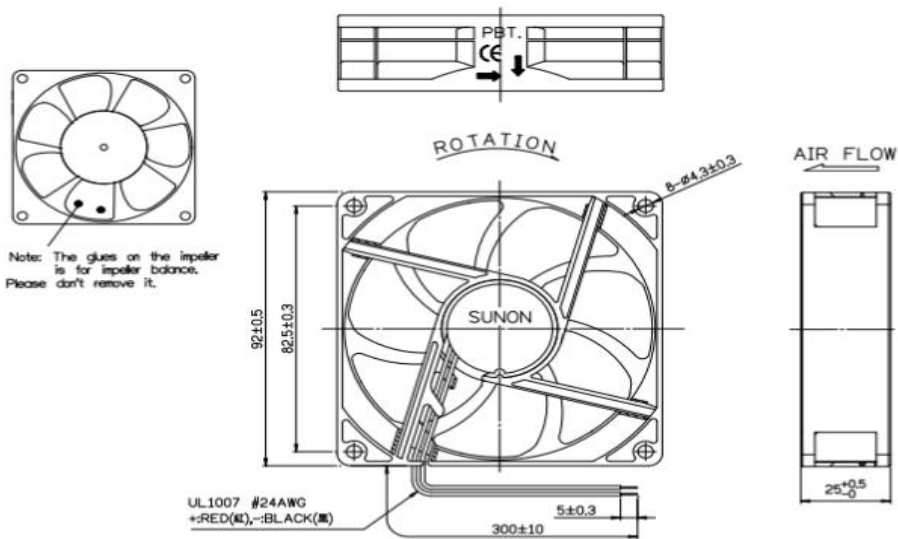

UNIT : mm