


# 70x70X25 mm (2.75x1 in)




- Frame:** Die cast aluminum
- Impeller:** Thermoplastic PBT V-0
- Ambient Temperature Range:** -10°C ~ +70°C
- Operating Voltage Range:** Rated Voltage ±10%
- Bearing:** MagLev
- Motor Structure:** Alveolate motor
- Motor protection:** Thermal Protected
- Termination:** Lead wire
- Weight:** 90g / PC,

## Dimension (units: mm)

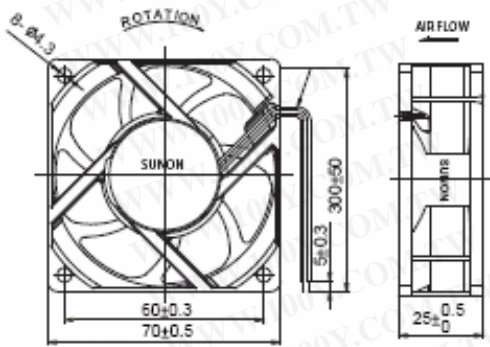

## Characteristic Curves

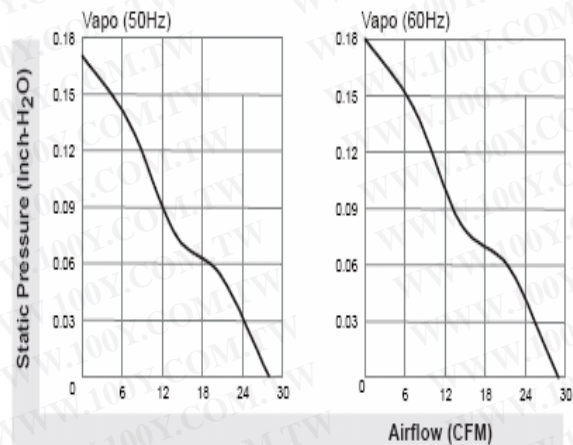

AC Axial Fan

## SPECIFICATION

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-34970699  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

Model	Safety Std.	Voltage (V)	Freq. (Hz)	Current (A)	Speed (RPM)	Air Flow (CFM)	Pressure (in-H <sub>2</sub> O)	Noise (dB)
P1072HVL	UL,CE,TUV	115	50/60	0.21/0.12	3800/3900	28/29	0.17/0.18	30/31
P2072HVL	UL,CE,TUV	230	50/60	0.21/0.22	3800/3900	28/29	0.17/0.18	30/31