

CONTACTOR RELAY, 4NO, DC 24 V,
SCREW CONNECTION, SIZE S00



勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

General details:	
Product brand name	SIRIUS
Product designation	contactor relay
Size of the contactor	S00
Protection class IP / on the front	IP20
Degree of pollution	3
Insulation voltage / with degree of pollution 3 / rated value	V 690
Installation altitude / at a height over sea level / maximum	m 2,000
Ambient temperature	
• during transport	°C -55 ... 80
• during storage	°C -55 ... 80
• during operating phase	°C -25 ... 60
Resistance against shock	10g / 5 ms and 5g / 10 ms
Impulse voltage resistance / rated value	kV 6
Item designation	
• according to DIN EN 61346-2	K
• according to DIN 40719 extendable after IEC 204-2 / according to IEC 750	K
Mechanical operating cycles as operating time	
• of the contactor / typical	30,000,000

- of the contactor with added auxiliary switch block / typical
- of the contactor with added electronics-compatible auxiliary switch block / typical

10,000,000

5,000,000

Control circuit:**Type of voltage / of the controlled supply voltage**

DC

Control supply voltage / 1

- for DC / rated value

V

24

Working range factor supply voltage rated value / of the magnet coil

- for DC

0.8 ... 1.1

Pull-in power / of the solenoid / for DC

W

3.2

Holding power / of the solenoid / for DC

W

3.2

Auxiliary circuit:**Product extension / auxiliary switch**

Yes

Identification number and letter for switching elements

40 E

Contact reliability / of the auxiliary contacts

1 faulty switching per 100 million (17 V, 1 mA)

Number of NC contacts / for auxiliary contacts

- delayed switching

0

- instantaneous switching

0

- asynchronous switching

0

- lagging switching

0

Number of NO contacts / for auxiliary contacts

- instantaneous switching

4

- delayed switching

4

- asynchronous switching

0

- leading switching

0

Number of changeover contacts

- for auxiliary contacts

0

- of the auxiliary contacts / instantaneous switching

0

Operating current / of the auxiliary contacts

- at AC-12 / maximum

A

10

- at AC-15

- at 230 V

A

6

- at 400 V

A

3

- at 500 V

A

2

- at 690 V

A

1

- with 1 current path

- at DC-12

- at 24 V

A

10

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

- at 110 V
- at 220 V
- at DC-13
 - at 24 V
 - at 110 V
 - at 220 V

A	3
A	1
A	10
A	1
A	0.22

Short-circuit:

Design of the fuse link / for short-circuit protection of the auxiliary switch / required

fuse gL/gG: 10 A

Installation/mounting/dimensions:

Built in orientation

with vertical mounting surface +/-180° rotatable, with vertical mounting surface +/- 30° tiltable to the front and back

Type of mounting

screw and snap-on mounting

Width

mm 45

Height

mm 57.5

Depth

mm 72

Distance, to be maintained, to the ranks assembly / sideways

mm 0

Connections:

Design of the electrical connection / for auxiliary and control current circuit

screw-type terminals

Type of the connectable conductor cross-section

- for auxiliary contacts
 - solid
 - finely stranded
 - with conductor end processing
- for AWG conductors / for auxiliary contacts

2x (0.5 ... 1.5 mm²), 2x (0.75 ... 2.5 mm²), max. 2x (1 ... 4 mm²)

2x (0.5 ... 1.5 mm²), 2x (0.75 ... 2.5 mm²)

2x (20 ... 16), 2x (18 ... 14), 1x 12

Certificates/approvals:

Verification of suitability

CSA / UL / CCC / GL / LRS / BV / DNV / RMRS / RINA

General Product Approval

Test Certificates

[CQC](#)

[Manufacturer](#)

Shipping Approval

[ABS](#)

[PRS](#)

Shipping Approval

other

[Manufacturer](#)

Safety:

Proportion of dangerous failures

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

• with high demand rate / according to SN 31920	%	75
• with low demand rate / according to SN 31920	%	40
T1 value / for proof test interval or service life / according to IEC 61508	a	20
Protection against electrical shock		finger-safe
B10 value / with high demand rate / according to SN 31920		1,000,000

Further information:



Information- and Downloadcenter (Catalogs, Brochures,...)
<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)
<http://www.siemens.com/industrial-controls/mall>

CAX-Online-Generator
<http://www.siemens.com/cax>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)
<http://support.automation.siemens.com/WW/view/en/3RH1140-1BB40/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)
http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3RH1140-1BB40

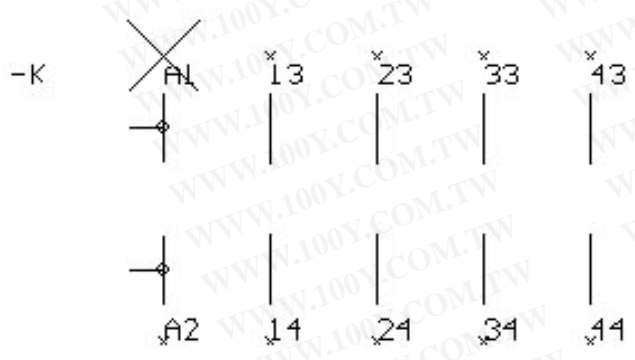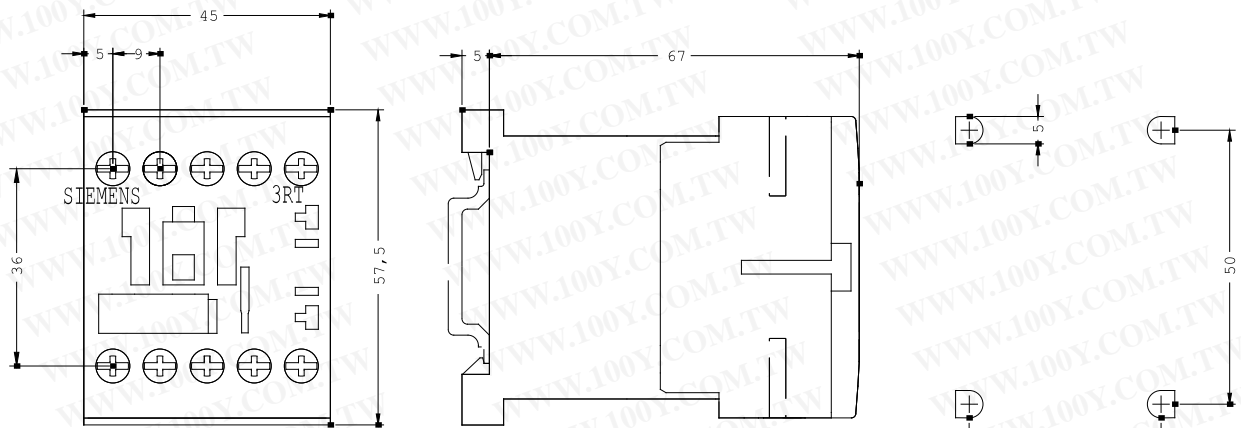

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

last change: Nov 30, 2010