

High Speed Fuses

North American — FWP 700V: 5-1200A

FWP

Specifications

Description: North American style stud-mount fuses.

Dimensions: See Dimensions illustrations.

Ratings:

Volts: — 700Vac

Amps: — 5-1200A

IR: — 200kA RMS Sym.


— 50kA @700Vdc

Agency Information: CE, UL Recognition & CSA Component Acceptance on 5-800A

Electrical Characteristics

Total Clearing I^2t

The total clearing I^2t at rated voltage and at power factor of 15% are given in the electrical characteristics. For other voltages, the clearing I^2t is found by multiplying by correction factor, K, given as a function of applied working voltage, E_g , (rms).

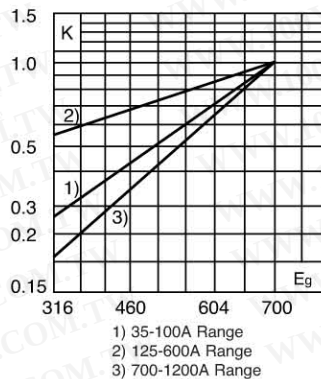

Dimensions (in)


Amp Range	Fig.	A	B	C	D	E	F	G	H	I
5-30	1	2.870	0.563	1.855	2.477	2.477	0.250	0.405	0.063	0.250
35-60	1	4.375	0.813	2.750	3.708	3.312	0.344	0.725	0.125	0.542
70-100	1	4.406	0.947	2.594	3.625	3.563	0.344	0.750	0.125	0.375
125-200	1	5.090	1.500	2.840	4.190	3.500	0.410	1.000	0.250	0.750
225-400	1	5.090	2.000	2.840	4.280	3.530	0.410	1.500	0.250	0.780
450-600	1	7.090	2.500	2.840	5.720	4.190	0.530	2.000	0.380	1.300
700-800	1	6.630	2.000	2.844	5.562	5.062	0.625	1.500	0.250	0.875
900-1000	2	See Drawing								
1200	3	See Drawing								

1mm = 0.0394" / 1" = 25.4mm

Fig. 1: 5-800A


Fig. 2: 900-1000A

Fig. 3: 1200A

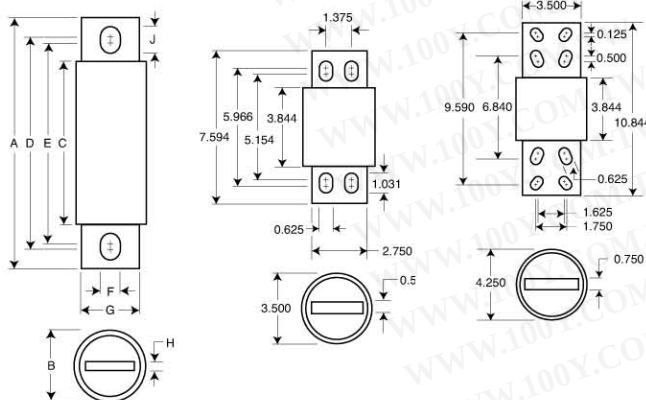


Arc Voltage

This curve gives the peak arc voltage, U_L , which may appear across the fuse during its operation as a function of the applied working voltage, E_g , (rms) at a power factor of 15%.

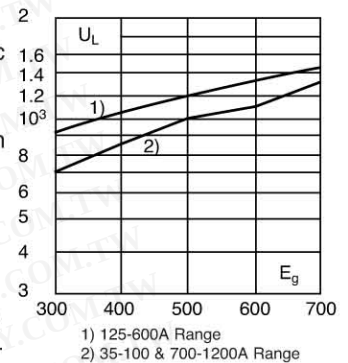

Power Losses

Watts loss at rated current is given in the electrical characteristics. The curve allows the calculation of the power losses at load currents lower than the rated current. The correction factor, K_p , is given as a function of the RMS load current, I_b , in % of the rated current.



Catalog Numbers

Catalog Numbers	Rated Current RMS-Amps	Electrical Characteristics			Watts Loss
		I^2t (A² Sec)		Clearing at 700V	
		Pre-arc			
FWP-5B	5	1.6		10	1.5
FWP-10B	10	3.6		20	4
FWP-15B	15	10		75	5.5
FWP-20B	20	26		180	6
FWP-25B	25	44		340	7
FWP-30B	30	58		450	9
FWP-35B	35	34		160	12
FWP-40B	40	76		320	12
FWP-50B	50	135		600	12
FWP-60B	60	210		950	15.5
FWP-70B	70	305		2000	18
FWP-80B	80	360		2400	21
FWP-90B	90	415		2700	25
FWP-100B	100	540		3500	27
FWP-125A	125	1800		7300	28
FWP-150A	150	2900		11700	32
FWP-175A	175	4200		16700	35
FWP-200A	200	5500		22000	43
FWP-225A	225	7700		31300	45
FWP-250A	250	10500		42500	48
FWP-300A	300	17600		71200	58
FWP-350A	350	23700		95600	65
FWP-400A	400	31000		125000	78
FWP-450A	450	36400		137000	94
FWP-500A	500	45200		170000	107
FWP-600A	600	66700		250000	122
FWP-700A	700	54000		300000	125
FWP-800A	800	78000		450000	140
FWP-900A	900	91500		530000	150
FWP-1000A	1000	120000		600000	170
FWP-1200A	1200	195000		1100000	190

• Watts loss provided at rated current.
 • See accessories on page 106.

Features and Benefits

- Excellent dc performance
- Low arc voltage and low energy let-through (I^2t)
- Superior cycling capability


Typical Applications

- DC common bus
- DC drives
- Power converters/rectifiers
- Reduced voltage starters


North American — FWP 700V: 5-1200A

FWP 5-30A(B): 700V

Time-Current Curve

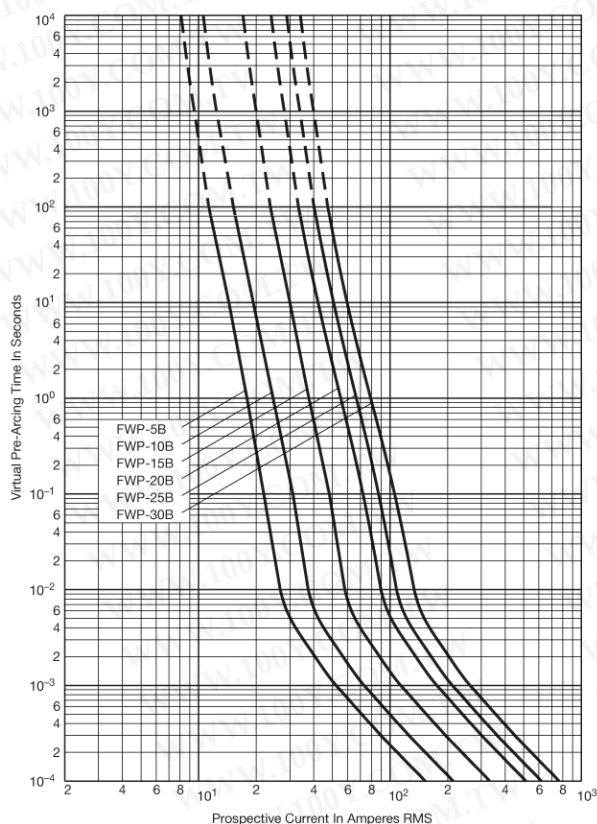


Peak Let-Through Curve

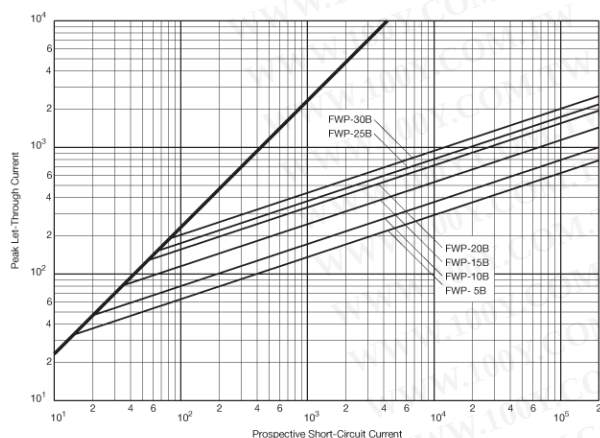


FWP 35-100A(B) & 700-1200A(A): 700V

Time-Current Curve

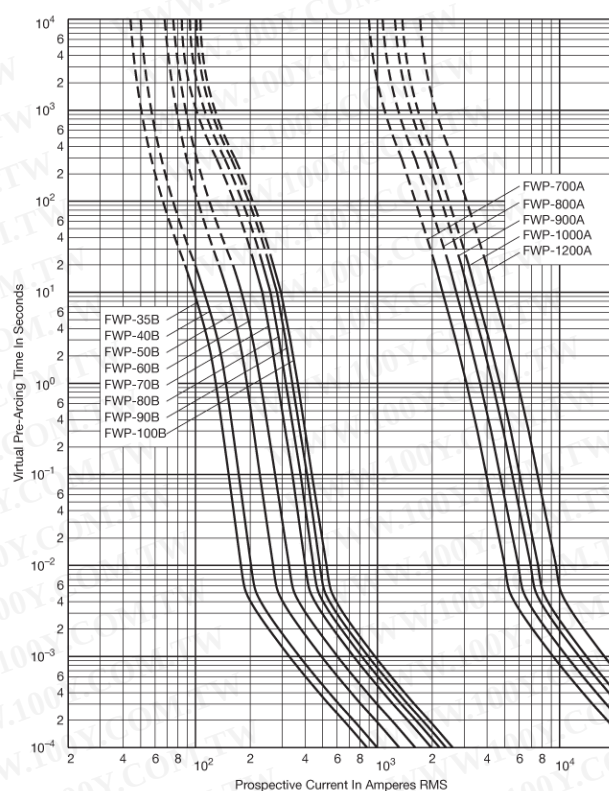

Peak Let-Through Curve

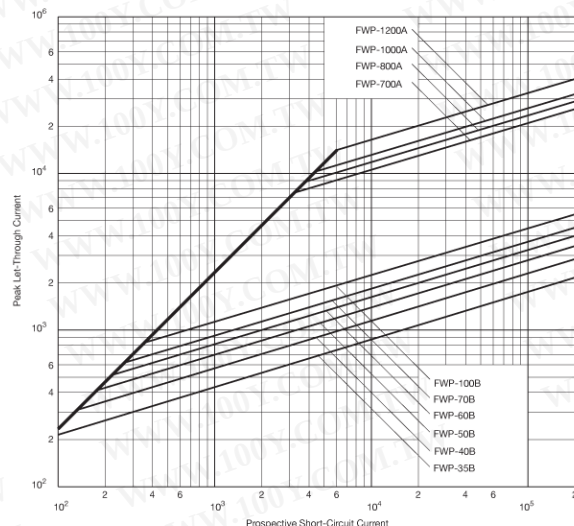


勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)


North American — FWP 700V: 5-1200A

FWP 125-600A: 700V

Time-Current Curve

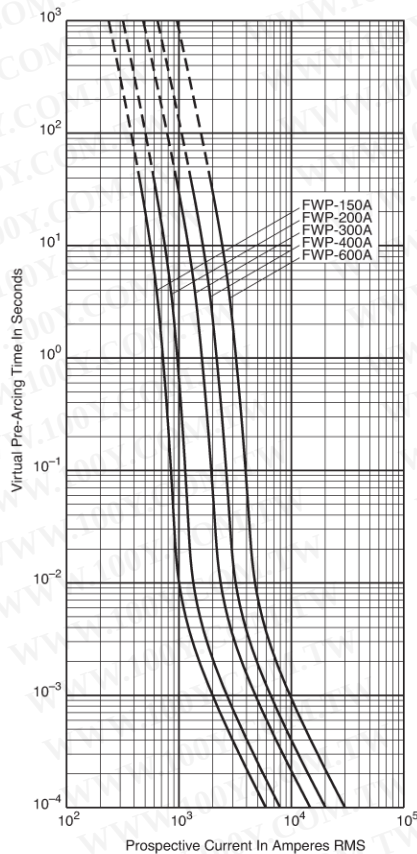

Peak Let-Through Curve

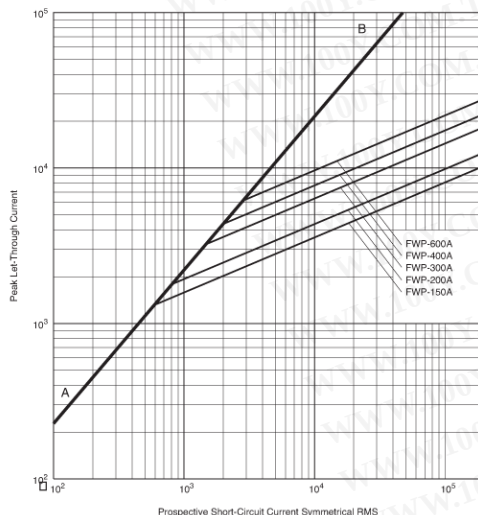

Did You Know?

Cooper Bussmann Named First in Fuses by Readers of Plant Services Magazine

Cooper Bussmann has been named as the vendor offering the highest value in electrical fuses in a recent fill-in-the-blank survey of nearly 40,000 qualified readers of Plant Services Magazine. A full 70 percent of survey respondents said Cooper Bussmann was their number one choice. The nearest competitor weighed in at only 7 percent. The 63 percent spread was the widest of all 63 product categories, ranging from aerial work platforms to welding equipment. According to Plant Services editors, the products chosen are those “that deliver the combination of functionality, durability and low maintenance that add up to the lowest estimated life-cycle cost”—those offering the very best value in their product category.