
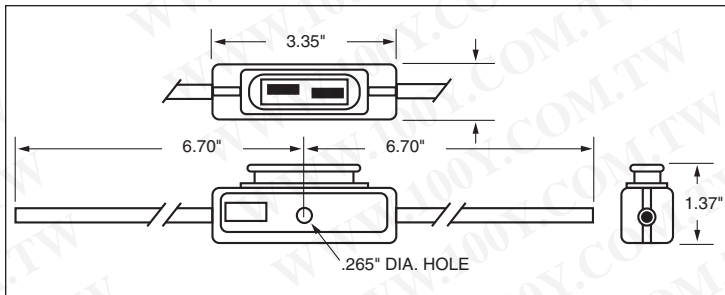


**Description**

- In-Line Fuseholders for MAXI® Fuses.
- Voltage Rating: 32Vdc maximum
- Current Rating: See Table
- Firewall mounting hole permits two or more holders to be mounted together. Cover comes with a removable strap.

**Ordering**

- Specify packaging and product code



MAXI® Fuse Blade Type Holder				
Catalog Code	Description	Fuse Size	Electrical Connection	Maximum Continuous Current Rating
HHX	Black fuseholder w/cover	20-60A	#6 red lead wire;	48A*
HHX-B	Black fuseholder - Body only		5" length with blunt ends	
HHX-C	Black cover only			

\* or 80% of fuse rating, whichever is less

**A fuse must be properly and fully inserted into the holder to provide a solid connection. Poor or improper insertion of the fuse can result in failure of the fuse and holder, thus not protecting the device for which it was intended.**

PACKAGING CODE	
Packaging Code	Description
BK	100 pieces in a box