


Fuse Systems



5/2	Introduction
	NEOZED fuse systems
5/4	Introduction
5/7	NEOZED fuse links
5/8	MINIZED switch disconnectors and MINIZED fuse switch disconnectors
5/9	NEOZED fuse bases and accessories
5/12	DIAZED fuse systems
	Cylindrical fuse systems
5/18	Cylindrical fuse links and cylindrical fuse holders
5/22	Fuse holders in size 10 x 38 mm and Class CC
5/26	Class CC fuse systems
5/28	Busbar systems
	LV HRC fuse systems
5/34	LV HRC fuse links
5/43	LV HRC signal detectors
5/45	LV HRC sockets and accessories
	SITOR semiconductor fuses
5/53	SITOR LV HRC design
5/61	SITOR, cylindrical fuse design
5/64	NEOZED and DIAZED design, SILIZED
	Photovoltaic fuses 
5/66	Introduction
5/67	PV cylindrical fuses
5/68	PV cumulative fuses

For further technical product information:

Service&Support Portal:







www.siemens.com/lowvoltage/technical-support









→ Product List:
Technical specifications

→ Entry List:
Updates / Downloads / FAQs /
Manuals / Operating instructions /
Characteristic curves / Certificates

Introduction

Overview

Devices	Page	Application	Standards	Used in		
				Non-residential buildings	Residential buildings	Industry
 <p>NEOZED fuse systems</p>	5/4	MINIZED switch disconnectors, bases, fuse links from 2 A to 63 A of operational class gG and accessories. Everything you need for a complete system.	Fuse system: IEC 60269-3 Safety switching devices: IEC/EN 60947-3 DIN VDE 0638	✓	✓	✓
 <p>DIAZED fuse systems</p>	5/12	Fuse links from 2 A to 100 A in various operational classes, base versions with classic screw base connections. A widely used fuse system.	IEC 60269-3; DIN VDE 0635; CEE 16	✓	✓	✓
Cylindrical fuse systems						
 <p>Cylindrical fuse links and cylindrical fuse holders</p>	5/18	Line protection or protection of switching devices. The fuse holders with touch protection ensure the safe "no-voltage" replacement of fuse links. Auxiliary switches can be retrofitted	IEC 60269-1, -2, -3; NF C 60-200; NF C 63-210, -211; NBN C 63269-2, CEI 32-4, -12	✓	✓	✓
 <p>Compact fuse holders in size 10 x 38 mm and Class CC</p>	5/22	For installing fused loaded motor starter combinations.	IEC 60269-1,-2; IEC 60947-4; UL 512; CSA	✓	--	✓
 <p>Class CC fuse systems</p>	5/26	These comply with American standard and have UL and CSA approval, for customers exporting OEM products and mechanical engineers. Modern design with touch protection according to BGV A3 for use in "branch circuit protection".	Fuse holders: UL 512; CSA 22.2 Fuse links: UL 248-4; CSA 22.2	✓	✓	✓
 <p>Busbar systems</p>	5/28	Busbars for NEOZED fuse bases, NEOZED fuse disconnectors, MINIZED switch disconnectors, DIAZED fuse systems and cylindrical fuse systems.	EN 60439-1	✓	✓	✓

Devices	Page	Application	Standards	Used in			
				Non-residential buildings	Residential buildings	Industry	
LV HRC fuse systems							
	LV HRC fuse links	5/34	Fuse links from 2 A to 1250 A for selective line protection and system protection in non-residential buildings, industry and power utilities.	IEC 60269-1, -2; EN 60269-1	✓	✓	✓
	LV HRC signal detectors	5/43	Signal detectors for when a fuse is tripped on all LV HRC fuse links with combination or front indicators with non-insulated grip lugs. Plus the comprehensive accessory range required for LV HRC fuse systems.	--	✓	✓	✓
	LV HRC sockets and accessories	5/45	Fuse bases for screw or snap-on mounting onto standard mounting rails, available as 1-pole or 3-pole version	IEC 60269-1, -2; EN 60269-1	✓	✓	✓
SITOR semiconductor fuses							
	SITOR LV HRC design	5/53	Fuse links in LV HRC design and a huge variety of models support a wide range of applications from 500 V to 1500 V and 150 A to 1600 A. Fuses with slotted blade contacts, bolt-on links or female thread and special designs.	--	--	--	✓
	SITOR, cylindrical fuse design	5/61	Fuse links, fuse holders – usable as fuse switch disconnectors and fuse bases up to 600/690 V AC and 400/700 V DC from 1 A to 100 A in the sizes 10 × 38 mm, 14 × 51 mm and 22 × 58 mm.	--	--	--	✓
	NEOZED and DIAZED, SILIZED design	5/64	NEOZED fuse links for 400 V AC and 250 V DC and DIAZED for 500 V AC and 500 V DC.	--	--	--	✓
Photovoltaic fuses							
	PV cylindrical fuses	5/67	Fuses with a rated voltage of 1000 V DC and gPV operational class for the protection of photovoltaic modules, their connecting cables and other components.	IEC 60269-6	✓	✓	✓
	PV cumulative fuses	5/68	Fuses with a rated voltage of 1000 V and 1500 V DC, a rated current of 63 A to 400 A and gPV operational class for the protection of connecting cables and other components.	IEC60269-6	✓	✓	✓

Fuse Systems

NEOZED Fuse Systems

Introduction

Overview


The NEOZED fuse system is primarily used in distribution technology and industrial switchgear assemblies. The system is easy to use and is also approved for domestic installation.

The MINIZED switch disconnectors are primarily used in switchgear assemblies and control engineering. They are approved for switching loads as well as for safe switching in the event of short circuits. The MINIZED D02 is also suitable for use in the pre-counter area in household applications in compliance with the recommendations of the VDEW according to TAB 2007.

Due to its small footprint, the MINIZED D01 fuse switch disconnector is primarily used in control engineering.

The NEOZED fuse bases are the most cost-effective solution for the application of NEOZED fuses. All NEOZED bases must be fed from the bottom to ensure that the threaded ring is insulated during removal of the fuse link. The terminals of the NEOZED bases are available in different versions and designs to support the various installation methods.

Benefits

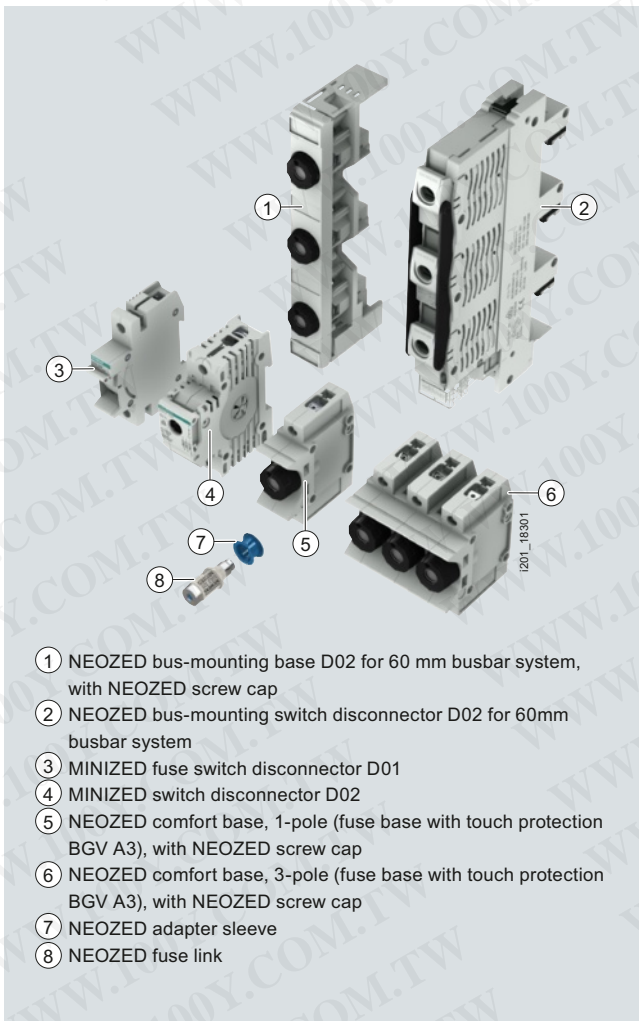

Compared to the older DIAZED fuse system, the NEOZED fuse system is significantly more modern:

- Much more compact which saves space in the distribution board
- Modern devices like the MINIZED switching devices, which combine the functions of a switch disconnector and a fuse base
- Wide range of accessories, such as busbars for one, two, or three-phase wiring
- Modern terminals for MINIZED D02 and NEOZED comfort bases: Visible, clear and controllable connection simplifies cable entry

Double terminal chambers permit connection of two wires of different cross-sections

- Lower power loss of the fuse links

Even when compared to the internationally prevalent cylindrical fuse system, the NEOZED fuse system has considerable advantages:

- Non-interchangeability - thanks to use of adapter sleeves (i.e. it is not possible to insert a fuse for larger currents). This is a requirement of numerous wiring regulations in Germany and other European countries
- Switching devices with load switching characteristics allow the safe switching of load currents up to 63 A

Technical specifications

		NEOZED fuse links 5SE2								
Standards		IEC 60269-3								
Operational class		gG								
Rated voltage U_n		V AC	400							
		V DC	250							
Rated current I_n		A	2 ... 100							
Rated breaking capacity		kA AC	50							
		kA DC	8							
Non-interchangeability		Using adapter sleeves								
Resistance to climate		°C Up to 45 at 95 % rel. humidity								
Ambient temperature		°C -5 ... +40, humidity 90 % at 20								
		MINIZED switch dis-connectors D02 5SG7 1	MINIZED fuse switch dis-connectors D01 5SG7 6	Fuse bases, made of ceramic D01 5SG1 5 5SG5 5			D02 5SG1 6 5SG5 6	D03 5SG1 8	Comfort bases D01/02 5SG1 .01 5SG5 .01	Fuse bases 5SG1 .30 5SG1 .31 5SG5 .30
Standards		DIN VDE 0638 IEC/EN 60947-3		IEC 60269-3						
Main switch characteristic EN 60204-1		Yes		--						
Insulation characteristic EN 60664-1		Yes		--						
Rated voltage U_n		V AC	230/400, 240/415		400					
• 1P		V DC	65	48	250					
• 2P in series		V DC	130	110	250					
Rated current I_n		A	63	16	16	63	100	16/63	16/63	
Rated insulation voltage		V AC	500	400	--					
Rated impulse withstand voltage		kV AC	6	2.5	--					
Overvoltage category		4		--						
Utilization category acc. to VDE 0638		--								
• AC-22		A	63	16	--					
Utilization category acc. to EN 60947-3		--								
• AC-22 B		A	63	16	--					
• AC-23 B		A	35	--	--					
• -22 DC B		A	63	--	--					
Sealable when switched on		Yes		Yes, with sealable screw caps						
Mounting position		Any, but preferably vertical								
Reduction factor of I_n with 18 pole		--								
• Side-by-side mounting		0.9		--						
• On top of one another, with vertical standard mounting rail		0.87		--						
Degree of protection acc. to IEC 60529		IP20, with connected conductors								
Terminals with touch protection acc. to BGV A3		Yes			No			Yes		
Ambient temperature		°C -5 ... +40, humidity 90 % at 20								
Terminal versions		--		--		B	K, S	K/S	--	--
Conductor cross-sections		--								
• Solid and stranded		mm ²	1.5 ... 35	1.5 ... 16	1.5 ... 4	1.5 ... 25	10 ... 50	0.75 ... 35	1.5 ... 35	
• Flexible, with end sleeve		mm ²	1.5 ... 35	1.5	1.5	1.5	10	--	--	
• Finely stranded, with end sleeve		mm ²	--	--	0.75 ... 25	--	--	--	--	
Tightening torques		Nm	2.5 ... 3	1.2	1.2	2	3.5/2.5	3.5	3	

Fuse Systems

NEOZED Fuse Systems

Introduction

More information

5



Fuse bases D01 with terminal version BB

- Incoming feeders, clamp-type terminal B
- Outgoing feeders, clamp-type terminal B



Fuse bases D02, with terminal version KS




- Incoming feeders, screw head contact K
- Outgoing feeders, saddle terminal S



Fuse bases D02, with terminal version SS

- Incoming feeders, saddle terminal S
- Outgoing feeders, saddle terminal S

Selection and ordering data






Sizes	I_n	Identification color	Mounting width	DT	Order No.	Price per PU	PU (UNIT, SET, M)	PS*/P. unit	PG	Weight per PU approx.
	A		MW							kg
NEOZED fuse links, rated voltage 400 V AC/250 V DC, gG operational class										
	D01	2	Pink	▶	5SE2 302		1	10 units	017	0.005
		4	Brown	▶	5SE2 304		1	10 units	017	0.013
		6	Green	▶	5SE2 306		1	10/500 units	017	0.009
		10	Red	▶	5SE2 310		1	10/500 units	017	0.007
		13	Black	▶	5SE2 013-2A		1	10 units	017	0.006
		16	Gray	▶	5SE2 316		1	10/500 units	017	0.005
	D02	20	Blue	▶	5SE2 320		1	10 units	017	0.011
		25	Yellow	▶	5SE2 325		1	10 units	017	0.010
		32	Black	▶	5SE2 332		1	10 units	017	0.013
		35	Black	▶	5SE2 335		1	10 units	017	0.011
		40	Black	▶	5SE2 340		1	10 units	017	0.015
		50	White	▶	5SE2 350		1	10 units	017	0.013
	D03	63	Copper	▶	5SE2 363		1	10 units	017	0.015
		80	Blue	▶	5SE2 280		1	10 units	017	0.035
	100	Red	▶	5SE2 300		1	10 units	017	0.042	

Fuse Systems

NEOZED Fuse Systems




MINIZED switch disconnectors and MINIZED fuse switch disconnectors

Selection and ordering data

Sizes	Number of poles	I_n	Mounting width	DT	Order No.	Price per PU	PU (UNIT, SET, M)	PS*/P. unit	PG	Weight per PU approx.	
		A	MW							kg	
MINIZED switch disconnectors with fuses using draw-out technology with touch protection according to BGV A3 (adapter sleeves not included in the scope of delivery)											
	D02	1P	63	1.5	▶ 5SG7 113		1	1 unit	017	0.141	
		1P+N	63	3		5SG7 153		1	1 unit	017	0.259
		2P	63	3		5SG7 123		1	1 unit	017	0.276
		3P	63	4.5	▶	5SG7 133		1	1 unit	017	0.411
		3P+N	63	6		5SG7 163		1	1 unit	017	0.524
Versions for Austria only, with permanently fitted adapter sleeves, incl. fuse link											
	D02	3P	25	4.5	5SG7 133-8BA25		1	1 unit	017	0.450	
			35		5SG7 133-8BA35		1	1 unit	017	0.448	
			50		5SG7 133-8BA50		1	1 unit	017	0.455	
Reducers For fuse links D01 in MINIZED switch disconnectors D02											
					5SH5 527		1	10/100 units	031	0.001	
Auxiliary switches (AS) For MINIZED switch disconnectors D02											
		1 NO + 1 NC		0.5	▶ 5ST3 010		1	1 unit	020	0.066	
		2 NO			5ST3 011		1	1 unit	020	0.055	
		2 NC			5ST3 012		1	1 unit	020	0.055	
For technical specifications, see chapter "Miniature circuit breakers" → Additional components*											
Auxiliary switches (AS) with TEST button For MINIZED switch disconnectors D02											
		1 NO + 1 NC		0.5	5ST3 010-2		1	1 unit	020	0.045	
		2 NO			5ST3 011-2		1	1 unit	020	0.045	
		2 NC			5ST3 012-2		1	1 unit	020	0.045	
For technical specifications, see chapter "Miniature circuit breakers" → Additional components*											
MINIZED fuse switch disconnectors For industrial applications With draw-out technology and touch protection acc. to BGV A3 (not compatible with NEOZED adapter sleeves)											
	D01	1P	16	1	5SG7 610		1	1 unit	017	0.082	
		1P+N	16	2	5SG7 650		1	1 unit	017	0.169	
		2P	16	2	5SG7 620		1	1 unit	017	0.165	
		3P	16	3	5SG7 630		1	1 unit	017	0.241	
		3P+N	16	4	5SG7 660		1	1 unit	017	0.323	

For busbars, see page 5/30 ff.

Selection and ordering data

	Sizes	Number of poles	I_n	Matching cover ¹⁾	Terminals ²⁾	Mounting width	DT	Order No.	Price per PU	PU (UNIT, SET, M)	PS* / P. unit	PG	Weight per PU approx.	
			A			MW							kg	
	NEOZED comfort bases made of molded plastic													
	With touch protection according to BGV A3													
	D01	1P	16	--		1.5	▶	5SG1 301		1	3 units	017	0.114	
	D02		63	--			▶	5SG1 701		1	3 units	017	0.116	
	D01	3P	16	--		4.5	▶	5SG5 301		1	1 unit	017	0.382	
	D02		63	--			▶	5SG5 701		1	1 unit	017	0.380	
	NEOZED fuse bases made of molded plastic													
	For snap-on mounting on standard mounting rails, with cover													
	D01	1P	16	(A1)		1.5		5SG1 330		1	6 units	017	0.077	
	D02		63	(A1)		1.5		5SG1 730		1	6 units	017	0.085	
	For snap-on mounting on standard mounting rails, w/o cover													
	D01	1P	16	A1		1.5		5SG1 331		1	6 units	017	0.069	
	D02		63	A1		1.5		5SG1 731		1	6 units	017	0.081	
	For snap-on mounting on standard mounting rails, with cover													
	D01	3P	16			4.5		5SG5 330		1	2 units	017	0.227	
	D02		63			4.5		5SG5 730		1	2 units	017	0.270	
		NEOZED fuse bases made of ceramic												
		For snap-on mounting on standard mounting rails, with cover												
D01		1P	16	(A4)	BB	1.5	▶	5SG1 553		1	6 units	017	0.065	
D02			63	(A10)	SS	1.5		5SG1 653		1	6 units	017	0.091	
D02			63	(A10)	KS	1.5	▶	5SG1 693		1	6 units	017	0.080	
For snap-on mounting on standard mounting rails, w/o cover														
D01		1P	16	A4, A8	BB	1.5		5SG1 595		1	6 units	017	0.059	
D02			63	A10, A8	SS	1.5		5SG1 655		1	6 units	017	0.082	
D02			63	A10, A8	KS	1.5		5SG1 695		1	6 units	017	0.078	
D03			100	A6, A9	KS	2.5		5SG1 812		1	10 units	017	0.190	
For snap-on mounting on standard mounting rails, with cover														
D01		3P	16		BB	4.5	▶	5SG5 553		1	2 units	017	0.203	
D02			63		SS	4.5	▶	5SG5 653		1	2 units	017	0.272	
D02			63		KS	4.5	▶	5SG5 693		1	2 units	017	0.256	

1) Covers with brackets are part of the scope of delivery.
Covers without brackets are not part of the scope of delivery.

2) For terminal versions, see page 5/6.

Fuse Systems

NEOZED Fuse Systems










NEOZED fuse bases and accessories

Sizes	I_n	Matching cover	Mounting width	DT	Order No.	Price per PU	PU (UNIT, SET, M)	PS* / P. unit	PG	Weight per PU approx. kg
	A		MW							
NEOZED covers										
Made of molded plastic, plug-in, for fuse bases made of molded plastic										
D01, D02	A1		1.5		5SH5 244		1	15 units	017	0.002
For fuse bases made of ceramic										
D01	A4		1.5		5SH5 251		1	15 units	017	0.008
D02	A10		1.5		5SH5 253		1	15 units	017	0.006
Screw-on										
D03	A6		2.5		5SH5 233		1	20 units	017	0.019
NEOZED caps										
Made of molded plastic, plug-in										
D01, D02	A8				5SH5 235		1	5 units	017	0.021
Screw-on										
D03	A9				5SH5 234		1	10 units	017	0.065

5



NEOZED fuse bases and accessories

Sizes	For fuse links	Identification color	Mounting width	DT	Order No.	Price per PU	PU (UNIT, SET, M)	PS*/P. unit	PG	Weight per PU approx.
	A		MW							kg
NEOZED screw caps										
Molded plastic, with inspection hole										
	D01			▶	5SH4 116		1	10/1000 units	017	0.007
	D02			▶	5SH4 163		1	10/200 units	017	0.009
Ceramic										
	D01, sealable				5SH4 316		1	10 units	017	0.017
	D02, sealable				5SH4 363		1	10 units	017	0.022
	D03				5SH4 100		1	3 units	017	0.074
Ceramic, with inspection hole										
	D01			▶	5SH4 317		1	20 units	017	0.017
	D02			▶	5SH4 362		1	20 units	017	0.019
NEOZED adapter sleeves										
	D01	2	Pink	▶	5SH5 002		1	10 units	017	0.002
		4	Brown		5SH5 004		1	10 units	017	0.002
		6	Green	▶	5SH5 006		1	10 units	017	0.002
		10/13	Red	▶	5SH5 010		1	10 units	017	0.002
	D02	20	Blue	▶	5SH5 020		1	10 units	017	0.002
		25	Yellow	▶	5SH5 025		1	10 units	017	0.002
		32/35/40	Black	▶	5SH5 035		1	10 units	017	0.003
		50	White	▶	5SH5 050		1	10 units	017	0.002
	D03	80	Silver		5SH5 080		1	25 units	017	0.002
For fuse links D01 in base D02 and MINIZED switch disconnectors D02										
	D02	2	Pink		5SH5 402		1	10 units	017	0.003
		4	Brown		5SH5 404		1	10 units	017	0.005
		6	Green		5SH5 406		1	10 units	017	0.002
		10/13	Red		5SH5 410		1	10 units	017	0.014
		16	Gray		5SH5 416		1	10 units	017	0.002
NEOZED adapter sleeve fitters										
					5SH5 100		1	1/10 units	017	0.023
NEOZED retaining springs										
For fuse links D01 in screw caps										
	D02	2 ... 16			5SH5 400		1	25 units	017	0.002

DIAZED fuse systems

Overview

The DIAZED fuse system is one of the oldest fuse systems in the world. It was developed by Siemens as far back as 1906. It is still the standard fuse system in many countries to this day. It is particularly widely used in the harsh environments of industrial applications.

The series is available with rated voltages from 500 V to 750 V.


All DIAZED bases must be fed from the bottom to ensure an insulated threaded ring when the fuse link is being removed. Reliable contact of the fuse links is only ensured when used together with DIAZED screw adapters.

The terminals of the DIAZED bases are available in different versions and designs to support the various installation methods.

The high-performing EZR bus-mounting system for screw fixing is an outstanding feature. The busbars, which are particularly suited for bus-mounting bases, have a load capacity of up to 150 A with lateral infeed.

DIAZED stands for **D**iametral gestuftes **z**weiteiliges Sicherungs-**s**ystem mit **E**disonsgewinde (diametral two-step fuse system with Edison screw).

Benefits

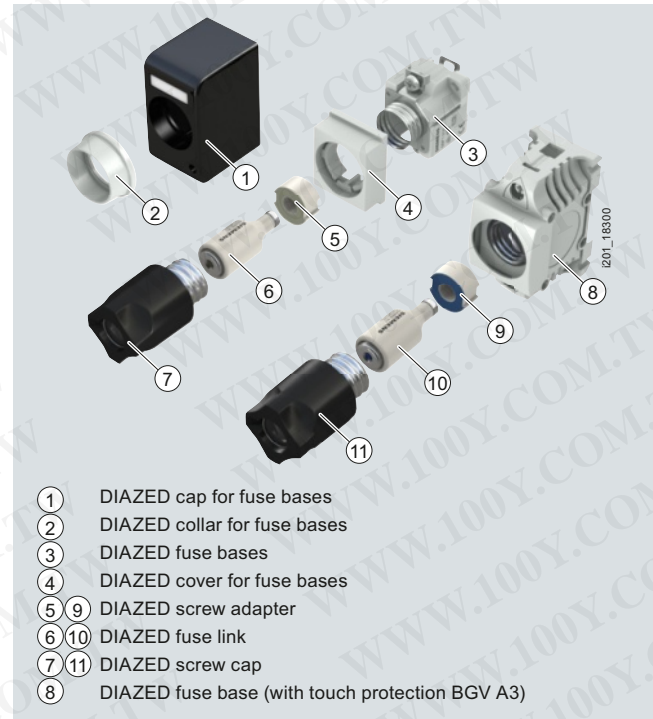






Technical specifications








		5SA, 5SB, 5SC, 5SD
Standards		IEC 60269-3; DIN VDE 0635; CEE 16
Operational class	Acc. to IEC 60269	gG
Characteristic	Acc. to DIN VDE 0635	Slow and quick
Rated voltage U_n	V AC V DC	500, 690, 750 500, 600, 750
Rated current I_n	A	2 ... 100
Rated breaking capacity	kA AC kA DC	50, 40 at E16 8, 1.6 at E16
Mounting position		Any, but preferably vertical
Non-interchangeability		Using screw adapter or adapter sleeves
Degree of protection	Acc. to IEC 60529	IP20, with connected conductors
Resistance to climate	°C	Up to 45, at 95 % rel. humidity
Ambient temperature	°C	-5 ... +40, humidity 90 % at 20

		Terminal version									
		B			K			S		R	
Size		DII	DIII	NDz	DII	DIII	DIII	DIV	DII	DIII	
Conductor cross-sections											
• Rigid, min.	mm ²	1.5	2.5	1.0	1.5	2.5	2.5	10	1.5	1.5	
• Rigid, max.	mm ²	10	25	6	10	25	25	50	35	35	
• Flexible, with end sleeve	mm ²	10	25	6	10	25	25	50	35	35	
Tightening torques											
• Screw M4	Nm	1.2								--	
• Screw M5	Nm	2.0								--	
• Screw M6	Nm	2.5								3.0	
• Screw M8	Nm	3.5								--	

Selection and ordering data

Sizes	U_n	I_n	Identification color	Thread	DT	Order No.	Price per PU	PU (UNIT, SET, M)	PS*/P. unit	PG	Weight per PU approx.
	V AC/V DC	A									kg
DIAZED fuse links											
Operational class gG											
	DII	500/500	2	Pink	E27	▶ 5SB2 11		1	25 units	017	0.019
			4	Brown		▶ 5SB2 21			25 units		0.024
			6	Green		▶ 5SB2 31			25 units		0.023
			10	Red		▶ 5SB2 51			25 units		0.022
			16	Gray		▶ 5SB2 61			25 units		0.028
			20	Blue		▶ 5SB2 71			25 units		0.035
			25	Yellow		▶ 5SB2 81			25 units		0.030
	DIII	500/500	32	Black	E33	5SB4 010		1	25 units	017	0.046
			35	Black		5SB4 11			25 units		0.051
			50	White		5SB4 21			25 units		0.048
			63	Copper		5SB4 31			25 units		0.054
	DIV	500/400	80	Silver	R1¼"	5SC2 11		1	3 units	017	0.129
			100	Red		5SC2 21			3 units		0.119
Characteristic: slow											
	TNDz	500/500	2	Pink	E16	5SA2 11		1	10 units	017	0.011
			4	Brown		5SA2 21			10 units		0.020
			6	Green		5SA2 31			10 units		0.015
			10	Red		5SA2 51			10 units		0.012
			16	Gray		5SA2 61			10 units		0.013
			20	Blue		5SA2 71			10 units		0.014
			25	Yellow		5SA2 81			10 units		0.030
Operational class gG, use 5SF1 and 5SF5 fuse base made of ceramic for 2 A ... 25 A screw adapter DII											
	DIII	690/600	2	Pink	E33	5SD8 002		1	5 units	017	0.068
			4	Brown		5SD8 004			5 units		0.071
			6	Green		5SD8 006			5 units		0.067
			10	Red		5SD8 010			5 units		0.067
			16	Gray		5SD8 016			5 units		0.072
			20	Blue		5SD8 020			5 units		0.069
			25	Yellow		5SD8 025			5 units		0.072
			35	Black		5SD8 035			5 units		0.072
			50	White		5SD8 050			5 units		0.075
63	Copper	5SD8 063	5 units	0.078							

DIAZED fuse systems

	Sizes	U_n	I_n	Identifi- cation color	Thread	Terminals	DT	Order No.	Price per PU	PU (UNIT, SET, M)	PS*/ P. unit	PG	Weight per PU approx. kg
	V AC/ DC A												
	DIAZED fuse links												
	Characteristic: quick, also for direct current railway facilities for 2 A ... 25 A screw adapter DII												
	DIII	750/750	2	Pink	E33			5SD6 01	1	5 units	017	0.066	
			4	Brown				5SD6 02	1	5 units	017	0.072	
			6	Green				5SD6 03	1	5 units	017	0.068	
			10	Red				5SD6 04	1	5 units	017	0.072	
			16	Gray				5SD6 05	1	5 units	017	0.042	
			20	Blue				5SD6 06	1	5 units	017	0.074	
			25	Yellow				5SD6 07	1	5 units	017	0.072	
			35	Black				5SD6 08	1	5 units	017	0.072	
			50	White				5SD6 10	1	5 units	017	0.077	
			63	Copper				5SD6 11	1	5 units	017	0.078	
		DIAZED fuse bases made of ceramic											
	1P, for standard mounting rail												
	NDz	500/500	25		E16	KK ²⁾		5SF1 012	1	5 units	017	0.062	
	DII		25		E27	BB ²⁾	▶	5SF1 005	1	5 units	017	0.093	
	DIII ¹⁾		63		E33	BS ²⁾		5SF1 205	1	1 unit		0.142	
	DIII ¹⁾		63		E33	SS ²⁾		5SF1 215	1	5 units		0.141	
	1P, for screw fixing												
	NDz	500/500	25		E16	KK ²⁾		5SF1 01	1	5 units	017	0.057	
	DII		25		E27	BB ²⁾		5SF1 024	1	5 units	017	0.100	
	DIII ¹⁾		63		E33	BS ²⁾		5SF1 224	1	5 units		0.143	
	1P, with flat terminal												
	DIV		100		R1¼"			5SF1 401	1	1 unit		0.604	
	DIAZED fuse bases made of molded plastic												
	With touch protection according to BGV A3												
	1P, for standard mounting rail or screw fixing												
	DII	500/500	25		E27	RR		5SF1 060	1	3/108 units		0.146	
	DIII		63		E33	RR		5SF1 260	1	3/132 units		0.200	
	3P, for standard mounting rail or screw fixing												
	DII	500/500	25		E27	RR		5SF5 068	1	1/36 units		0.475	
	DIII		63		E33	RR	▶	5SF5 268	1	1/44 units	017	0.595	
	DIAZED EZR bus-mounting bases												
	1P, to snap onto EZR busbars for screw fixing												
	DII	500/500	25	E27	B ²⁾			5SF6 005	1	5 units	017	0.080	
	DIII	500/500	63	E33	B ²⁾			5SF6 205	1	5 units	017	0.114	

1) Also for 690 V AC/600 V DC.

2) For terminal versions, see page 5/17.

DIAZED fuse systems

	Sizes	U_n	I_n	Thread	Terminals	DT	Order No.	Price per PU	PU (UNIT, SET, M)	PS*/P. unit	PG	Weight per PU approx.	
	V AC/V DC		A									kg	
DIAZED components 750 V													
	DIAZED fuse bases 1P, for screw fixing, with fine thread and cap												
	DIII	750/750	63	E33S	KK ¹⁾		5SF4 230		1	1 unit	017	0.504	
	DIAZED screw caps made of ceramic, with fine thread												
	DIII	750/750	63	E33S			5SH1 161		1	5 units	017	0.134	
DIAZED screw caps													
	Molded plastic, with inspection hole, black, not for SILIZED fuse links												
	NDz	500/500	25	E16			5SH1 112		1	20 units	017	0.013	
	DII		25	E27			5SH1 221		1	5/200 units	017	0.024	
	DIII		63	E33			5SH1 231		1	5/5000 units	017	0.038	
	Ceramic												
	DII	500/500	25	E27			5SH1 12		1	50/30000 units	017	0.037	
	DIII		63	E33			5SH1 13		1	30 units	017	0.063	
	Ceramic, with inspection hole, sealable												
	DII	500/500	25	E27			5SH1 22		1	50/5000 units	017	0.046	
	DIII		63	E33			5SH1 23		1	30/5000 units	017	0.068	
	Ceramic												
	DIV	500/500	100	R1¼*			5SH1 141		1	1 unit	017	0.223	
	Ceramic, extended version												
	DIII	690/600	63	E33			5SH1 170		1	5 units	017	0.095	



¹⁾ For terminal versions, see page 5/17.

Fuse Systems

DIAZED fuse systems

	Sizes	Thread	For fuse links	DT	Order No.	Price per PU	PU (UNIT, SET, M)	PS*/P. unit	PG	Weight per PU approx. kg
DIAZED screw adapters										
	NDz	E16	2		5SH3 28	1	20 units	017	0.003	
			4		5SH3 31	1	20 units	017	0.002	
			6		5SH3 05	1	20 units	017	0.004	
			10		5SH3 06	1	20 units	017	0.003	
			16		5SH3 07	1	20 units	017	0.002	
Also for 5SF2 30 to 750 V										
	DII	E27	2	▶	5SH3 10	1	25/1500 units	017	0.014	
			4	▶	5SH3 11	1	25/1500 units	017	0.009	
			6	▶	5SH3 12	1	25/1500 units	017	0.015	
			10	▶	5SH3 13	1	25/1500 units	017	0.021	
			16	▶	5SH3 14	1	25/1500 units	017	0.008	
			20	▶	5SH3 15	1	25/1500 units	017	0.013	
25	▶	5SH3 16	1	25/1500 units	017	0.012				
Also for 5SF2 30 to 750 V										
	DIII	E33	35	▶	5SH3 17	1	25/850 units	017	0.025	
			50	▶	5SH3 18	1	25/850 units	017	0.018	
			63	▶	5SH3 20	1	25/850 units	017	0.019	
DIAZED adapter sleeves										
	DIV	R1¼*	80		5SH3 21	1	10/1000 units	017	0.006	
			100		5SH3 22	1	10/1000 units	017	0.004	
DIAZED adapter sleeves for screw caps										
	For NDz/TNDz fuse links in base DII				5SH3 01	1	10 units	017	0.011	
	For DII fuse links in DIII base				5SH3 02	1	10 units	017	0.012	
DIAZED adapter sleeve fitters										
	DII/DIII				5SH3 703	1	1 unit	017	0.046	
DIAZED caps made of molded plastic										
	NDz	E16			5SH2 01	1	5 units	017	0.044	
	DII	E27			5SH2 02	1	5 units	017	0.249	
	DIII	E33			5SH2 22	1	5 units	017	0.049	

DIAZED fuse systems

Sizes	Thread	DT	Order No.	Price per PU	PU (UNIT, SET, M)	PS*/P. unit	PG	Weight per PU approx. kg
DIAZED cover rings								
Ceramic DII and DIII, also for EZR bus-mounting base								
	DII	E27	5SH3 32		1	10 units	017	0.024
	DIII	E33	5SH3 34		1	10 units	017	0.031
Made of molded plastic, also for EZR bus-mounting base								
	DII	E27	5SH3 401		1	5/60 units	017	0.014
	DIII	E33	5SH3 411		1	5/60 units	017	0.020

5

More information



DIII fuse bases with terminal version BS

- Outgoing feeders (top), saddle terminal S
- Incoming feeders (bottom), clamp-type terminal B



NDZ fuse bases with terminal version KK

- Outgoing feeders (top), screw head contact K
- Incoming feeders (bottom), screw head contact K



DIII fuse bases with terminal version BB

- Outgoing feeders (top), clamp-type terminal B
- Incoming feeders (bottom), clamp-type terminal B



DIII fuse bases with terminal version SS

- Outgoing feeders (top), saddle terminal S
- Incoming feeders (bottom), saddle terminal S

Fuse Systems

Cylindrical Fuse Systems

Cylindrical fuse links and cylindrical fuse holders

Overview

Cylindrical fuses are standard in Europe. There are a range of different cylindrical fuse links and holders that comply with the standards IEC 60269-1, -2 and -3, and which are suitable for use in industrial applications.

In South West Europe they are also approved for use in residential buildings.

The cylindrical fuse holders are also approved according to UL 512. The cylindrical fuse holders are tested and approved as fuse disconnectors according to the switching device standard IEC 60947-3. They are not suitable for switching loads.

Cylindrical fuse holders can be supplied with or without signal detectors. In the case of devices with signal detector, a small electronic device with LED is located behind an inspection window in the plug-in module. If the inserted fuse link is tripped, this is indicated by the LED flashing.



The switching state of the fuse holder can be signaled over a laterally retrofitted auxiliary switch, which enables the integration of the fuses in the automation process.

Benefits

- Devices with pole number 1P+N are available in a single modular width. This reduces the footprint by 50 %.
- The sliding catch for type ranges 8 x 32 mm and 10 x 38 mm enables the removal of individual devices from the assembly.
- Space for a spare fuse in the plug-in module enables the fast replacement of fuses. This saves time and money and increases system availability.
- A flashing LED signals that a fuse link has been tripped. This enables fast detection during runtime







Technical specifications

		Cylindrical fuse links						
		3NW6 3..	3NW6 0..	3NW6 1..	3NW6 2..	3NW8 0..	3NW8 1..	3NW8 2..
Sizes	mm x mm	8 x 32	10 x 38	14 x 51	22 x 58	10 x 38	14 x 51	22 x 58
Standards		IEC 60269-1, -2, -3; NF C 60-200; NF C 63-210, -211; NBN C 63269-2, CEI 32-4, -12						
Operational class		gG					aM	
Rated voltages U_n	V AC	400	400 or 500					
Rated current I_n	A	2 ... 20	0.5 ... 32	4 ... 50	8 ... 100	0.5 ... 32	2 ... 50	10 ... 100
Rated breaking capacity								
• 500 V version	kA AC	--	120	100		120	100	
• 400 V version	kA AC	20	120	20		120	20	
Mounting position		Any, but preferably vertical						

		Cylindrical fuse holders			
		3NW7 3..	3NW7 0..	3NW7 1..	3NW7 2..
Sizes	mm x mm	8 x 32	10 x 38	14 x 51	22 x 58
Standards		IEC 60269-1, -2, -3; NF C 60-200; NF C 63-210, -211; NBN C 63269-2-1, CEI 32-4, -12			
Approvals	Acc. to UL Acc. to CSA	--			--
Rated voltage U_n	V AC Acc. to UL/CSA V AC	400 400	690 600		
Rated current I_n	A AC	20	32	50	100
Rated breaking capacity	kA	20	100		
Switching capacity		AC-20B (switching without load), DC-20B			
• Utilization category					
No-voltage changing of fuse links		Yes			
Sealable when installed		Yes			
Mounting position		Any, but preferably vertical			
Degree of protection	Acc. to IEC 60529	IP20, with connected conductors			
Terminals with touch protection according to BGV A3 at incoming and outgoing feeder		Yes			
Ambient temperature	°C	-5 ... +40, humidity 90 % at +20			
Conductor cross-sections					
• Rigid	mm ²	0.5 ... 10		2.5 ... 10	
• Stranded	mm ²	0.5 ... 10		2.5 ... 25	
• Finely stranded, with end sleeve	mm ²	0.5 ... 10 ¹⁾		2.5 ... 16	
• AWG (American Wire Gauge)		--	10 ... 20	6 ... 10	--
Tightening torques	Nm	1.2		2.0	2.5

¹⁾ Max. cross-section 10 mm² with K28 crimper from Klauke.

Selection and ordering data

Sizes	I_n	U_n	DT	Order No.	Price per PU	PU (UNIT, SET, M)	PS*/P. unit	PG	Weight per PU approx.
mm x mm	A	V AC							kg
Cylindrical fuse links, operational class gG									
	8 x 32	2	400	3NW6 302-1	1	1	10 units	017	0.004
				3NW6 304-1					
				3NW6 301-1					
				3NW6 303-1					
				3NW6 305-1					
				3NW6 307-1					
	10 x 38	0.5	500	3NW6 000-1	1	1	10 units	017	0.008
				3NW6 011-1					
				3NW6 002-1					
				▶ 3NW6 004-1					
				▶ 3NW6 001-1					
				▶ 3NW6 008-1					
				▶ 3NW6 003-1					
				▶ 3NW6 006-1					
				▶ 3NW6 005-1					
				▶ 3NW6 007-1					
				▶ 3NW6 010-1					
				▶ 3NW6 012-1					
				14 x 51					
		3NW6 101-1							
		3NW6 108-1							
		10/100 units							
		3NW6 103-1							
		10/100 units							
		3NW6 106-1							
		10/100 units							
		3NW6 105-1							
		10/100 units							
		3NW6 107-1							
		10/100 units							
		3NW6 110-1							
	10/100 units								
	3NW6 112-1								
	10/100 units								
	3NW6 117-1								
	10/100 units								
	3NW6 120-1								
	10/100 units								
	22 x 58	8	500	3NW6 208-1	1	1	10/100 units	017	0.051
				3NW6 203-1					
				3NW6 206-1					
				10/100 units					
				3NW6 205-1					
				10/100 units					
				3NW6 207-1					
				10/100 units					
				3NW6 210-1					
				10/100 units					
				3NW6 212-1					
				10/100 units					
				3NW6 217-1					
	10/100 units								
	3NW6 220-1								
	10/100 units								
	3NW6 222-1								
	10/100 units								
	3NW6 224-1								
	10/100 units								
	3NW6 230-1								
	10/100 units								
Cylindrical fuse links, operational class aM									
	10 x 38	0.5	500	3NW8 000-1	1	1	10 units	017	0.007
				3NW8 011-1					
				3NW8 002-1					
				10/100 units					
				3NW8 004-1					
				10/100 units					
				3NW8 001-1					
				10/100 units					
				3NW8 008-1					
				10/100 units					
				3NW8 003-1					
				10/100 units					
				3NW8 006-1					
	10/100 units								
	3NW8 005-1								
	10/100 units								
	3NW8 007-1								
	10/100 units								
	3NW8 010-1								
	10/100 units								
	3NW8 012-1								
	10/100 units								
	14 x 51	2	500	3NW8 102-1	1	1	10/50 units	017	0.018
				3NW8 104-1					
				3NW8 101-1					
				10/50 units					
				3NW8 108-1					
				10/50 units					
				3NW8 103-1					
				10/50 units					
				3NW8 106-1					
				10/50 units					
				3NW8 105-1					
				10/50 units					
				3NW8 107-1					
	10/50 units								
	3NW8 110-1								
	10/50 units								
	3NW8 112-1								
	10/50 units								
	3NW8 117-1								
	10/50 units								
	3NW8 120-1								
	10/50 units								


* You can order this quantity or a multiple thereof.


Fuse Systems


Cylindrical Fuse Systems

Cylindrical fuse links and cylindrical fuse holders

5

Sizes	I_n	U_n	DT	Order No.	Price per PU	PU (UNIT, SET, M)	PS*/P. unit	PG	Weight per PU approx.
mm × mm	A	V AC							kg
	22 × 58	10	500	3NW8 203-1		1	10/50 units	017	0.048
		12		3NW8 206-1		1	10/50 units	017	0.048
		16		3NW8 205-1		1	10/50 units	017	0.048
		20		3NW8 207-1		1	10 units	017	0.046
		25		3NW8 210-1		1	10 units	017	0.040
		32		3NW8 212-1		1	10 units	017	0.052
		40		3NW8 217-1		1	10 units	017	0.047
		50		3NW8 220-1		1	10 units	017	0.049
		63		3NW8 222-1		1	10 units	017	0.046
		80		3NW8 224-1		1	10 units	017	0.054
		100		400		3NW8 230-1	1	10 units	017



Number of poles	I_n	For fuse links of size	Mounting width	DT	Order No.	Price per PU	PU (UNIT, SET, M)	PS*/P. unit	PG	Weight per PU approx.
	A	mm × mm	MW							kg
Cylindrical fuse holders with signal detector										
	1P									
	20	8 × 32	1		3NW7 314		1	1 unit	017	0.067
	32	10 × 38	1		3NW7 014		1	1 unit	017	0.066
	50	14 × 51	1.5		3NW7 112		1	1 unit	017	0.100
	100	22 × 58	2		3NW7 212		1	1 unit	017	0.150
1P+N										
20	8 × 32	1		3NW7 354	1	1 unit	017	0.082		
32	10 × 38	1		3NW7 054	1	1 unit	017	0.080		
50	14 × 51	3		3NW7 152	1	1 unit	017	0.224		
100	22 × 58	4		3NW7 252	1	1 unit	017	0.359		
2P										
20	8 × 32	2		3NW7 324	1	1 unit	017	0.135		
32	10 × 38	2		3NW7 024	1	1 unit	017	0.134		
50	14 × 51	3		3NW7 122	1	1 unit	017	0.217		
100	22 × 58	4		3NW7 222	1	1 unit	017	0.328		
3P										
20	8 × 32	3		3NW7 334	1	1 unit	017	0.198		
32	10 × 38	3		3NW7 034	1	1 unit	017	0.199		
50	14 × 51	4.5		3NW7 132	1	1 unit	017	0.327		
100	22 × 58	6		3NW7 232	1	1 unit	017	0.495		
3P+N										
20	8 × 32	3		3NW7 364	1	1 unit	017	0.216		
32	10 × 38	3		3NW7 064	1	1 unit	017	0.215		
50	14 × 51	6		3NW7 162	1	1 unit	017	0.444		
100	22 × 58	8		3NW7 262	1	1 unit	017	0.681		

Number of poles	I_n	For fuse links of size	Mounting width	DT	Order No.	Price per PU	PU (UNIT, SET, M)	PS*/P. unit	PG	Weight per PU approx.
	A	mm × mm	MW							kg
Cylindrical fuse holders without signal detector										
	1P									
	20	8 × 32	1	▶	3NW7 313		1	1 unit	017	0.066
	32	10 × 38	1	▶	3NW7 013		1	1/12 units	017	0.076
	50	14 × 51	1.5	▶	3NW7 111		1	1 unit	017	0.108
	100	22 × 58	2	▶	3NW7 211		1	1 unit	017	0.165
1P+N										
20	8 × 32	1	▶	3NW7 353	1	1 unit	017	0.080		
32	10 × 38	1	▶	3NW7 053	1	1 unit	017	0.078		
50	14 × 51	3	▶	3NW7 151	1	1 unit	017	0.237		
100	22 × 58	4	▶	3NW7 251	1	1 unit	017	0.362		
2P										
20	8 × 32	2	▶	3NW7 323	1	1 unit	017	0.133		
32	10 × 38	2	▶	3NW7 023	1	1/6 units	017	0.132		
50	14 × 51	3	▶	3NW7 121	1	1 unit	017	0.217		
100	22 × 58	4	▶	3NW7 221	1	1 unit	017	0.326		

Fuse Systems

Cylindrical Fuse Systems

Cylindrical fuse links and cylindrical fuse holders

Number of poles	I_n	For fuse links of size	Mounting width	DT	Order No.	Price per PU	PU (UNIT, SET, M)	PS*/P. unit	PG	Weight per PU approx.
	A	mm × mm	MW							kg
Cylindrical fuse holders without signal detector										
	3P									
	20	8 × 32	3		3NW7 333		1	1 unit	017	0.194
	32	10 × 38	3	▶	3NW7 033		1	1/4 units	017	0.194
	50	14 × 51	4.5	▶	3NW7 131		1	1 unit	017	0.324
	100	22 × 58	6	▶	3NW7 231		1	1 unit	017	0.488
3P+N										
	20	8 × 32	3		3NW7 363		1	1 unit	017	0.208
	32	10 × 38	3	▶	3NW7 063		1	1 unit	017	0.205
	50	14 × 51	6		3NW7 161		1	1 unit	017	0.452
	100	22 × 58	8		3NW7 261		1	1 unit	017	0.685
Auxiliary switches										
	For indicating disconnection of the fuse link, solely for application of striker fuse links. For retrofitting using the factory-fitted brackets. Contact: 250 V AC, 5 A, Minimum contact load: 12 V, 25 mA									
	For fuse bases	14 × 51	0.5		3NW7 901		1	1 unit	017	0.048
	For fuse bases	22 × 58			3NW7 902		1	1 unit	017	0.048
For indicating the switching state of the fuse holder. For retrofitting using the factory-fitted brackets. Contact: 230 V AC, 6 A/110 V DC, 1 A Minimum contact load: 12 V, 25 mA Terminals 1.5 mm ² - 0.5 Nm										
	For fuse holders	10 × 38	0.5		3NW7 903		1	1 unit	017	0.034

More information

Mounting

Fuse holders, sizes 8 × 32 mm und 10 × 38 mm, have a sliding catch that enables the removal of individual devices from the assembly.

The infeed can be from the top or the bottom. Because the cylindrical fuse holders are fitted with the same anti-slip terminals at the top and the bottom, the devices can also be bus-mounted at the top or the bottom.

Auxiliary switches

Auxiliary switches are available for the cylindrical fuse holders. These are simply clipped onto the base using the factory-fitted brackets.

Sizes 8 × 32 mm und 10 × 38 mm:

The auxiliary switches support the remote display of the switching state ON or OFF of the fuse holder.

Sizes 14 × 51 mm und 22 × 58 mm:

The auxiliary switches support the remote display of fuse failure. However, fuse links with strikers are required for this function. When the fuse is tripped, a small striking pin - the striker - shoots out of the front of the fuse. Over an armature link in the auxiliary switch, the kinetic energy of this striker is used to switch a mini switch, which then initializes this signal over a floating contact.

Fuse Systems

Cylindrical Fuse Systems

Compact cylindrical fuse holders in size 10 x 38 mm and Class CC

Overview

A key feature of our three-pole fuse holders is their ultra compact design. With a width of only 45 mm, they are ideal for use with fused motor starter combinations. Because the contactor and the fuse holder have the same 45 mm width, they are easy to mount on top of one another. The strong current-limiting fuses ensure a type 2 protection level (coordination according to IEC 60947-4, no damage protection) for the contactor.

The UL version has an SCCR value of 200 kA. The accessories are generally UL-certified.

Customers can mount an auxiliary switch which signals the switching state or prevents the fuse holder from switching off under load by interrupting the contactor control, thus increasing safety for the operator and process. Busbars and a matching three-phase feeder terminal complete the product range.

Benefits

- Compact design, especially for motor starter combinations
- For IEC fuses of size 10 x 38 mm up to 32 A and Class CC UL fuses up to 30 A
- Meets the requirements of UL 508 with regard to clearances
- UL-approved microswitches, busbars and adapters for 60mm busbar systems
- Optical signal detector for fast fault locating

5







Compact cylindrical fuse holder Class CC with signal detector and mounted auxiliary switch




Installation configuration of a cylindrical fuse holder and a SIRIUS contactor on busbar device adapter for the 60 mm busbar system

Technical specifications

		Cylindrical fuse holders 3NW7 0...-1	Fuse holders 3NW7 5...-1HG
Sizes	mm x mm	10 x 38	Class CC
Standards		IEC 60269; UL 512; CSA	UL 512; CSA
Approvals • Acc. to UL • Acc. to CSA		 UL File Number E171267	 UL File Number E171267
Rated voltage U_n	V AC	690	600
Rated current I_n	A AC	32	30
Rated short-circuit strength	kA	120 (at 500 V) 80 (at 690 V)	200
Switching capacity • Utilization category		AC-20B (switching without load)	--
Rated impulse withstand voltage	kV	6	
Overvoltage category		III	
Pollution degree		2	
Max. power dissipation of the fuse link	W	3	
No-voltage changing of fuse links	°C	-5 ... +40, humidity 90 % at +20	
Sealable when installed		Yes	
Lockable with padlock		Yes	
Mounting position		Any, but preferably vertical	
Current direction		Any	
Degree of protection	Acc. to IEC 60529	IP20, with connected conductors	
Terminals with touch protection according to BGV A3 at incoming and outgoing feeder		Yes	
Ambient temperature	°C	-5 ... +40, humidity 90 % at +20	
Conductor cross-sections • Finely stranded, with end sleeve • AWG cables (American Wire Gauge)	mm ² AWG	1 ... 4 18 ... 10	
Tightening torques • Terminal screws	Nm lb.in	1.5 13 PZ2	

		Auxiliary switches 3NW7 903-1						
Standards		IEC 60947						
Approvals		  UL 508, UL File Number E334003						
Utilization category		AC-12	DC-13			AC-15		Acc. to UL
Rated voltage U_n	V AC V DC	250 --	-- 24	-- 120	-- 240	24 --	120 --	240 --
Rated current I_n	A	--	2	0.5	0.25	4	3	1.5

		Busbars 5ST2 60.	
For cylindrical fuse holders		3NW7 0...-1	3NW7 5...-1HG
Pin spacing	mm	15	
Standards		EN 60974-1, VDE 0660 part 100, IEC 60947-1:2004, UL 508, CSA 22.2	
Approvals		 UL 4248-1, UL File Number E337131	
Busbar material		E-Cu 58 F25	
Partition material		PA66-V0	
Lamp wire resistance /1.5 mm²	°C	960	
Insulation coordination		Overvoltage category III, degree of pollution 2	
Rated voltage U_n • Acc. to UL • Acc. to IEC	V AC V AC	-- 690	600 --
Maximum busbar current I_n • Acc. to UL • Acc. to IEC	A A	-- 80	65 --

Fuse Systems

Cylindrical Fuse Systems

Compact cylindrical fuse holders
in size 10 x 38 mm and Class CC

5

		Terminals 5ST2 600	
For cylindrical fuse holders		3NW7 0...-1	3NW7 5...-1HG
Pin spacing	mm	15	
Standards		IEC 60999:2000, UL 508	
Approvals		☑, UL 4248-1, UL File Number E337131	
Enclosure/cover material		PA66-V0	
Lamp wire resistance /1 mm²	°C	960	
Temperature resistance PA66-V0, HDT B ISO 179, UL 94-V0/1.5	°C	200	
Insulation coordination		Overvoltage category III, degree of pollution 2	
Max. operational voltage U_{max}			
• Acc. to UL	V AC	--	600
• Acc. to IEC	V AC	690	--
Maximum electrical load I_{max}			
• Acc. to UL	A	--	65
• Acc. to IEC	A	80	--
Rated current I_n		A	63
Conductor cross-sections			
• Solid/stranded	mm ²	2.5 ... 35	
• Finely stranded, with end sleeve	mm ²	2.5 ... 25	
Tightening torque of clamping screw		Nm	2.5 ... 3.5

Fuse Systems

Cylindrical Fuse Systems

Compact cylindrical fuse holders
in size 10 x 38 mm and Class CC

Selection and ordering data

Number of poles	I_n	For fuse links of size	Mounting width	DT	Order No.	Price per PU	PU (UNIT, SET, M)	PS*/P. unit	PG	Weight per PU approx.
	A	mm x mm	MW							kg

3NW7 cylindrical fuse holders



Cylindrical fuse holders ^{UL}

3P 32 10 x 38 2.5
Without signal detector
With signal detector

3NW7 033-1 1 1 unit 017 0.190
3NW7 034-1 1 1 unit 017 0.195

Fuse holders class CC ^{UL}

3P 30 Class CC 2.5
Without signal detector
With signal detector

3NW7 533-1HG 1 1 unit 018 0.192
3NW7 534-1HG 1 1 unit 018 0.195

Accessories


Auxiliary switches ^{UL}

AC-12, 5 A, max. 250 V, 1 NO, 1 NC 2.5

3NW7 903-1 1 1 unit 017 0.018

Version	I_n	Pin spacing	Length	DT	Order No.	Price per PU	PU (UNIT, SET, M)	PS*/P. unit	PG	Weight per PU approx.
	A	mm	mm							kg

Busbar system 5ST2 60.




Busbars ^{UL}

2 x 3P 63 15 45
3 x 3P 90
4 x 3P 135
5 x 3P 180

5ST2 601 1 10 units 020 0.450
5ST2 602 1 10 units 020 0.705
5ST2 603 1 10 units 020 0.950
5ST2 604 1 10 units 020 1.230

Accessories



Terminals ^{UL}

for conductor cross-section
2.5 mm² ... 35 mm²

5ST2 600 1 10 units 020 0.500

Length of adapter	Width of adapter	DT	Order No.	Price per PU	PU (UNIT, SET, M)	PS*/P. unit	PG	Weight per PU approx.
mm	mm							kg

Device adapters



Busbar device adapters¹⁾ with connecting cables (above) ^{UL}

Size S00,
rated voltage 690 V AC,
rated current 25 A,
1 support rail (35 mm),
connection cable AWG 12

200 45
260 45

8US12 51-5DS10 1 1 unit 143 0.310
8US12 51-5DT10 1 1 unit 143 0.324

Accessories



Mounting rails for busbar device adapter ^{UL}

For assembly of additional devices 45

8US19 98-7CB45 1 10 units 143 0.014

¹⁾ For further device adapters and accessories, see chapter "Busbar systems".

Class CC fuse systems

Overview

Class CC fuses are used for "branch circuit protection".

The enclosed fuse holders are designed and tested to comply with the US National Electrical Code NEC 210.20(A). This means that when subject to continuous operation, only 80 % of the rated current is permissible as operational current.

An operational current of 100 % of the rated current (30 A) is only permissible short-time.

The devices are prepared for the inscription labels of the ALPHA FIX terminal blocks 8WH8 120-7AA15 and 8WH8 120-7XA05.

There are three different series:

- Characteristic: slow 3NW1 ...-0HG
For the protection of control transformers, reactors, inductances. Significantly slower than the minimum requirements specified by UL for class CC fuses of 12 s at $2 \times I_n$.
- Characteristic: quick 3NW2 ...-0HG
For a wide range of applications, for the protection of lighting installations, heating, control systems.

- Characteristic: slow, current-limiting, 3NW3 ...-0HG
Slow for overloads and quick for short circuits. High current limitation for the protection of motor circuits

Note:

For class CC compact fuse holders for motor starter combinations, see page 5/25.

Benefits

- For switchgear assemblies and machine manufacturers who export their systems to the USA or Canada.
- Easier export due to UL and CSA approvals for typical applications
- Modern design with touch protection according to BGV A3 ensures safe installation.

Technical specifications

		Class CC fuse holders 3NW7 5.3-0HG	
Standards Approvals		UL 512; CSA C22.2 UL512; UL File No. E171267; CSA C22.2	
Rated voltage U_n	V AC	600	
Rated current I_n	A	30	
Rated conditional short-circuit current	kA	200	
Switching capacity		AC-20B (switching without load)	
• Utilization category			
Max. power dissipation of fuse links			
• With cable, 6 mm ²	W	3	
• With cable, 10 mm ²	W	4.3	
Rated impulse withstand voltage	kV	6	
Overvoltage category		II	
Pollution degree		2	
No-voltage changing of fuse links		Yes	
Sealable when installed		Yes	
Mounting position		Any	
Current direction		Any	
Degree of protection acc. to IEC 60529		IP20	
Terminals are touch-protected according to BGVA3 at the incoming and outgoing feeder		Yes	
Ambient temperature	°C	45	
Conductor cross-sections			
• Solid and stranded	mm ²	1.5 ... 25	
• AWG conductor cross-section, solid and stranded	AWG	16 ... 4	
Tightening torques	Nm	2.5 (22 lb.in)	

		Class CC fuse links		
		3NW1 ...-0HG	3NW2 ...-0HG	3NW3 ...-0HG
Standards Approvals		UL 248-4; CSA C22.2 UL 248-4; UL File Number E258218; CSA C22.2		
Characteristic		Slow	Quick	Slow, current limiting
Rated voltage	V AC	600	600	600
	V DC	--	--	150 (3 ... 15 A) 300 (< 3 A, > 15 A)
Rated breaking capacity	kA AC	200		

Class CC fuse systems

Selection and ordering data

Number of poles	U_n	I_n	Mounting width MW	DT	Order No.	Price per PU	PU (UNIT, SET, M)	PS*/P. unit	PG	Weight per PU approx. kg
	V	A								

Class CC fuse holders



1P	600	30	1		3NW7 513-0HG		1	12 units	018	0.069
2P	600	30	2		3NW7 523-0HG		1	6 units	018	0.139
3P	600	30	3		3NW7 533-0HG		1	4 units	018	0.208

5

I_n ¹⁾ A	DT	Characteristic: slow				Characteristic: quick				
		Order No.	Price per PU	PG	DT	Order No.	Price per PU	PU (UNIT, SET, M)	PS*/P. unit	PG

Class CC fuse links



0.6 (6/10)		3NW1 006-0HG		018		--					
0.8 (8/10)		3NW1 008-0HG		018		--					
1		3NW1 010-0HG		018		3NW2 010-0HG	1	10 units	018	0.008	
1.5 (1 ½)		3NW1 015-0HG		018		--					
2		3NW1 020-0HG		018		3NW2 020-0HG	1	10 units	018	0.008	
2.5		3NW1 025-0HG		018		--					
3		3NW1 030-0HG		018		3NW2 030-0HG	1	10 units	018	0.008	
4		3NW1 040-0HG		018		3NW2 040-0HG	1	10 units	018	0.008	
5		3NW1 050-0HG		018		3NW2 050-0HG	1	10 units	018	0.008	
6		3NW1 060-0HG		018		3NW2 060-0HG	1	10 units	018	0.008	
7.5		3NW1 075-0HG		018		--					
8		3NW1 080-0HG		018		3NW2 080-0HG	1	10 units	018	0.008	
10		3NW1 100-0HG		018		3NW2 100-0HG	1	10 units	018	0.008	
12		--				3NW2 120-0HG	1	10 units	018	0.008	
15		3NW1 150-0HG		018		3NW2 150-0HG	1	10 units	018	0.008	
20		3NW1 200-0HG		018		3NW2 200-0HG	1	10 units	018	0.008	
25		3NW1 250-0HG		018		3NW2 250-0HG	1	10 units	018	0.008	
30		3NW1 300-0HG		018		3NW2 300-0HG	1	10 units	018	0.008	

1) Values in brackets, American English Wording

I_n A	DT	Characteristic: slow, current limiting				PU (UNIT, SET, M)	PS*/P. unit	PG	Weight per PU approx. kg
		Order No.	Price per PU	DT	DT				

Class CC fuse links



1		3NW3 010-0HG				1	10 units	018	0.008
2		3NW3 020-0HG				1	10 units	018	0.008
3		3NW3 030-0HG				1	10 units	018	0.008
4		3NW3 040-0HG				1	10 units	018	0.008
5		3NW3 050-0HG				1	10 units	018	0.008
6		3NW3 060-0HG				1	10 units	018	0.008
8		3NW3 080-0HG				1	10 units	018	0.008
10		3NW3 100-0HG				1	10 units	018	0.008
12		3NW3 120-0HG				1	10 units	018	0.008
15		3NW3 150-0HG				1	10 units	018	0.008
20		3NW3 200-0HG				1	10 units	018	0.008
25		3NW3 250-0HG				1	10 units	018	0.008
30		3NW3 300-0HG				1	10 units	018	0.008

Busbar systems


Overview

Busbars with pin-type connections can be used for NEOZED safety switching devices and fuse bases. Busbars in 10 mm² and 16 mm² versions are available.


Busbars with fork plugs are used for the most frequently used NEOZED fuse bases made of ceramic.

Benefits

5

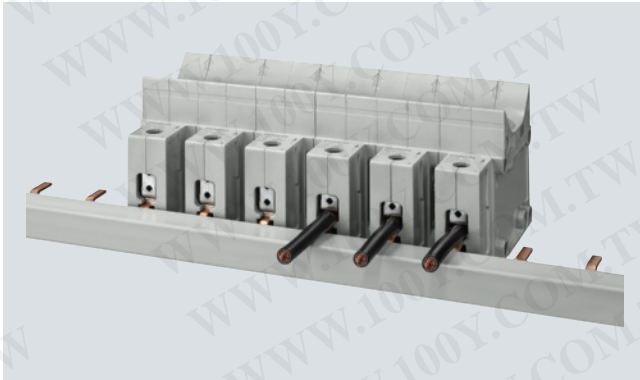


- Clear and visible conductor connection that can be easily checked when using NEOZED comfort base D02 and which facilitates cable entry

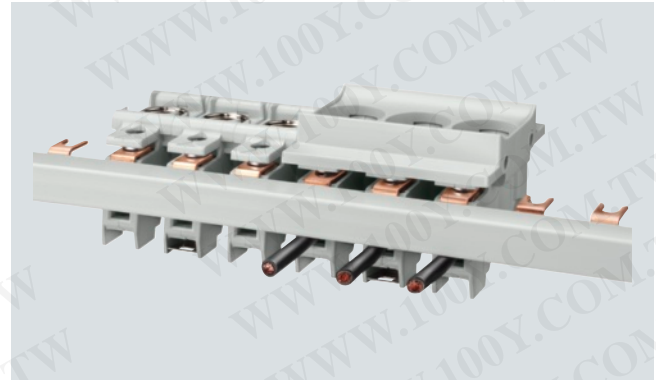


- Bus-mounting of NEOZED fuse bases made of molded plastic on three-phase busbar with fork plug, which can be cut to length




- Bus-mounting of NEOZED fuse bases made of ceramic on three-phase busbar with fork plug, which can be cut to length

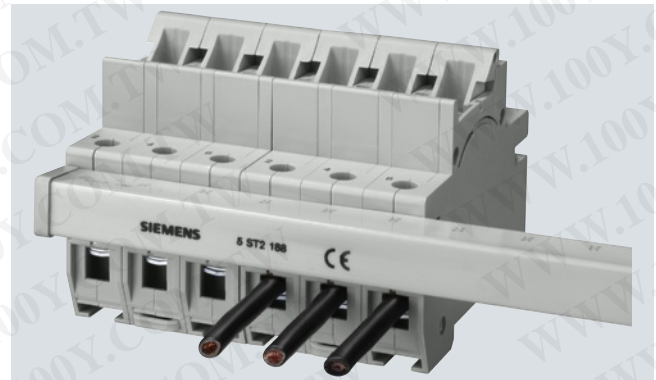

- Bus mounting of MINIZED fuse switch disconnectors D01 with three-phase pin busbar, which can be cut to length with fork plug

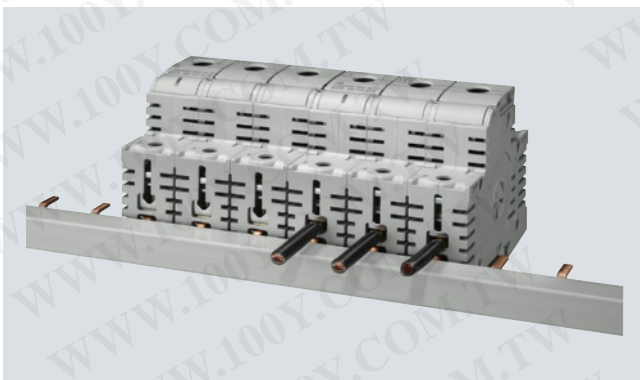


- Clear and visible conductor connection that can be easily checked when using MINIZED switch disconnectors D02. This facilitates cable entry and saves time

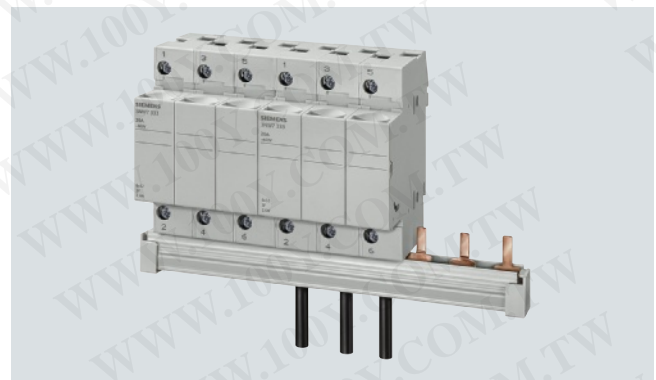


- Bus-mounting of cylindrical fuse holders 8 × 32 mm and 10 × 38 mm with three-phase pin busbar which can be cut to length

Busbar systems

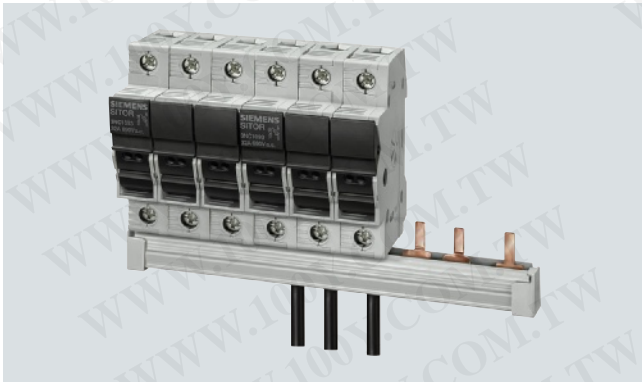

- Bus-mounting of SITOR cylindrical fuse holders 10 mm x 38 mm with the same terminal connection as Class CC fuse holders with three-phase pin busbar which can be cut to length

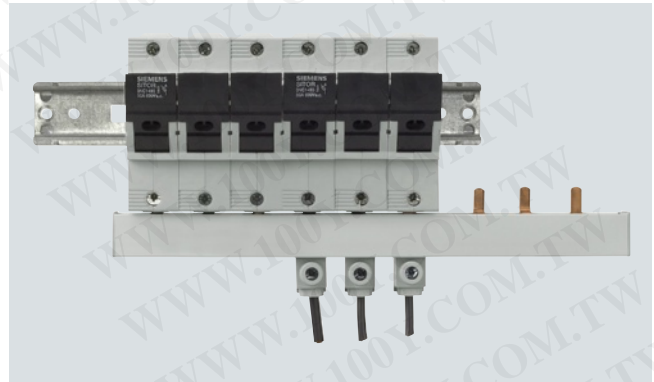

- Bus mounting with infeed through a connection terminal directly on the fuse holder up to a conductor cross-section of 25 mm²

5

Technical specifications


		5ST, 5SH
Standards		EN 60439-1: 2005-01
Busbar material		SF-Cu F 24
Partition material		Plastic, Cycloxy 3600, Heat-resistant over 90 °C, flame-retardant, self-extinguishing, dioxin and halogen-free
Rated operational voltage U_c	V AC	400
Rated current I_n		
• Cross-section 10 mm ²	A	63
• Cross-section 16 mm ²	A	80
Rated impulse withstand voltage U_{imp}	kV	4
Test pulse voltage (1.2/50)	kV	6.2
Rated conditional short-circuit current I_{cc}	kA	25
Resistance to climate		
• Constant atmosphere	Acc. to DIN 50015	23/83; 40/92; 55/20
• Humid heat	Acc. to IEC 60068-2-30	28 cycles
Insulation coordination		
• Overvoltage category		III
• Pollution degree		2
Maximum busbar current I_g/phase		
• Infeed at the start of the busbar		
- Cross-section 10 mm ²	A	63
- Cross-section 16 mm ²	A	80
• Infeed at the center of the busbar		
- Cross-section 10 mm ²	A	100
- Cross-section 16 mm ²	A	130

Busbar systems


5ST3 7...-HG busbars acc. to UL 508

	5ST3 7...-0HG	5ST3 7...-2HG	5ST3 770-0HG	5ST3 770-1HG
Standards	UL 508, CSA C22.2 No. 14-M 95			
Approvals	UL 508 File No. E328403 CSA			
Operational voltage				
• Acc. to IEC	V AC	690		
• Acc. to UL 489	V AC	600		
Rated conditional short-circuit current	kA	10 (RMS symmetrical 600 V for three cycles)		
• Dielectric strength	kV/mm	25		
• Surge strength	kV	> 9.5		
Rated current	A	--	--	115
Maximum busbar current I_S/phase				
• Infeed at the start of the busbar	A	80	100	--
• Infeed at the center of the busbar	A	160	200	--
Insulation coordination				
• Overvoltage category		III		
• Pollution degree		2		
Busbar cross-section	mm ² Cu	18	25	--
Infeed		Any		
Conductor cross-sections	AWG	--	--	10 ... 1/0
	mm ²	--	--	6 ... 35
Terminals				
• Terminal tightening torque	Nm	--	--	5
	lb.in	--	--	50
				3.5
				35

Infeed at the start of the busbar

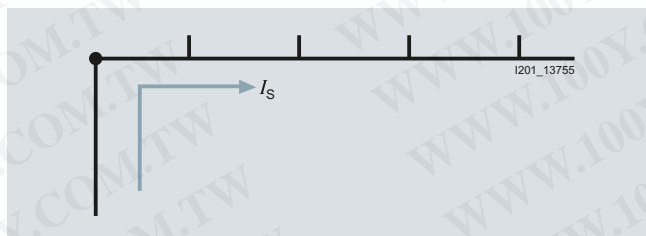


Infeed along the busbar or midpoint infeed

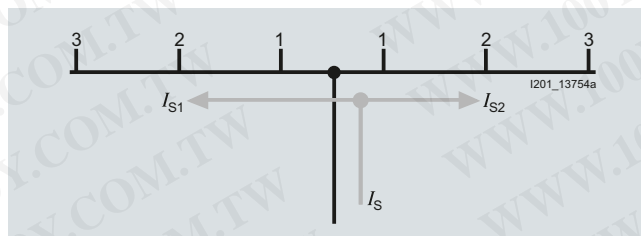







The sum of the output current per branch must not be greater than the busbar current $I_{S1,2}$ / phase.

Selection and ordering data

Phases	Conductor cross-section	Load capacity up to	Pin spacing	Length	DT	Order No.	Price per PU	PU (UNIT, SET, M)	PS*/P. unit	PG	Weight per PU approx.
	mm ²	A	MW	mm							kg
Busbars											
For MINIZED switch disconnectors D02											
For NEOZED comfort bases D01/D02											
made of molded plastic											
5SG1 301, 5SG1 701, 5SG5 301, 5SG5 701											
For NEOZED fuse bases D01/D02 made of ceramic											
terminal version S (saddle terminal)											
For cylindrical fuse holder 14 x 51 mm											
For cylindrical fuse holder SITOR 14 x 51 mm											
Can be cut to length, without end caps											
Single-phase	16	130	1.5	1016	▶	5ST3 703		1	1 unit	020	0.185
Three-phase	16	120	1.5	1016		5ST3 714		1	1 unit	020	0.540





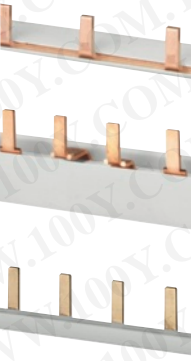





Busbar systems

	Phases	Conductor cross-section mm ²	Load capacity up to A	Pin spacing MW	Length mm	DT	Order No.	Price per PU	PU (UNIT, SET, M)	PS*/P. unit	PG	Weight per PU approx. kg	
For MINIZED fuse switch disconnectors D01													
	Can be cut to length, without end caps												
	Single-phase	16	120	1	1000		5ST2 190		1	1 unit	020	0.222	
	Two-phase						5ST2 191		1	1 unit	020	0.448	
	Three-phase						5ST2 192		1	1 unit	020	0.582	
	Can be cut to length, with 2 end caps												
	Single-phase	16	120	1	220		5ST2 186		1	1 unit	020	0.048	
Two-phase						5ST2 187		1	1 unit	020	0.092		
Three-phase						5ST2 188		1	1 unit	020	0.110		
For NEOZED fuse bases D01/D02													
<ul style="list-style-type: none"> Made of molded plastic 5SG1 .30, 5SG1 .31, 5SG5 .30 Made of ceramic, terminal version B and K (clamp-type terminal, screw head contact) 													
	Non-insulated												
	Single-phase	20	116	1.5	1000		5SH5 321		1	1 unit	017	0.169	
		36	168	1.5			5SH5 322		1	1 unit	017	0.260	
	Can be cut to length, without end caps												
	Single-phase	24	160	1.5	1000		5SH5 517		1	1 unit	017	0.342	
	Three-phase	16	120	1.5	1000	▶	5SH5 320		1	1 unit	017	0.562	
													
	For cylindrical fuse holder 8 × 32 mm and 10 × 38 mm												
	For cylindrical fuse holder SITOR 10 × 38 mm												
For class CC fuse holder ¹⁾													
	Can be cut to length, without end caps												
	Single-phase	16	120	1	1016	▶▶	5ST3 701		1	1 unit	020	0.196	
	Two-phase		120	1			5ST3 705		1	1 unit	020	0.452	
	Three-phase	16	120	1	1016	▶	5ST3 710		1	1 unit	020	0.610	
	Cannot be cut to length, fully insulated												
	Single-phase	16		1	214	▶▶▶	5ST3 700		1	1 unit	020	0.039	
Two-phase			1			5ST3 704		1	1 unit	020	0.092		
Three-phase			1			5ST3 708		1	1 unit	020	0.116		
End caps for busbars													
	For single-phase busbars 5ST2 190												
							5ST2 196		1	10 units	020	0.001	
	For 2-phase busbar 5ST2 191 and For three-phase busbar 5ST2 192												
							5ST2 197		1	10 units	020	0.001	
	For single-phase busbars 5ST3 7, 5SH5 5												
						5ST3 748		1	10 units	020	0.001		
For two-phase and three-phase 5ST3 7 and for 5SH5 320 busbars													
						5ST3 750		1	10 units	020	0.001		

¹⁾ For UL-approved busbars, see page 5/33.

Busbar systems

	Phases	Conductor cross-section mm ²	Load capacity up to A	Length mm	DT	Order No.	Price per PU	PU (UNIT, SET, M)	PS*/P. unit	PG	Weight per PU approx. kg
	Touch protection for free connection of pin busbars Yellow, (RAL1004) 5 x 1 pin					5ST3 655		1	10 units	020	0.003
	Terminals For NEOZED fuse bases D01/D02 made of ceramic For DIAZED fuse bases DII/DIII made of ceramic Terminal version S For con- 2 ... 25 ductors							1	10/300 units	017	0.011
	Terminal versions B and K For con- 6 ... 25 ductors					5SH5 328		1	10/300 units	017	0.016
		For the infixed of fork-type or pin busbars For con- 6 ... 35 ductors					5ST2 157		1	5 units	020
		Busbars For 1-pole DIAZED fuse bases made of ceramic with terminal versions BB and BS Size DII, for 19 bases Single-phase 24 80 1000					5SH3 500		1	1/25 units	017
		Size DIII, for 25 bases Single-phase 39 120 1000					5SH3 501		1	1/25 units	017
		Busbars For DIAZED bus-mounting bases/EZR with thread for screw adapters For size DII, 42 5SF6 005 bases Single-phase 48 150 2000					5SH3 54		1	5 units	017
		For size DIII, 34 5SF6 205 bases Single-phase 48 150 2000					5SH3 55		1	5 units	017
		Bus-mounting terminals For DIAZED EZR bus-mounting bases Non-insulated									
	For con- 1.5 ... 16 ductors					8JH4 122		1	10 units	046	0.009
For con- 10 ... 35 ductors					8JH4 124		1	10 units	046	0.023	

5ST3 7...-HG busbars acc. to UL 508

	Pin spacing	Length	DT	Order No.	Price per PU	PU (UNIT, SET, M)	PS*/P. unit	PG	Weight per PU approx.
	MW	mm							kg
5ST3 7...-HG busbars according to UL 508, 18 mm², can be cut, without end caps									
	Single-phase								
	<ul style="list-style-type: none"> For fuse holders 10 x 38 mm class CC (3NC1 091, 3NW7 513-0HG) or MCB 1P (5SY) 								
	1	1000		5ST3 701-0HG		1	1 unit	005	0.330
	<ul style="list-style-type: none"> For fuse holders 14 x 51 mm (3NC1 491, 3NW7 111) or MCB 1P (5SY, 5SP) with AS or FC 								
	1.5	1000		5ST3 703-0HG		1	1 unit	005	0.330
	Two-phase								
	<ul style="list-style-type: none"> For fuse holders 10 x 38mm/class CC (3NC1 092, 3NW7 523-0HG) or MCB 2P (5SY) 								
	1	1000		5ST3 705-0HG		1	1 unit	005	0.700
	Three-phase								
	<ul style="list-style-type: none"> For fuse holders 10 x 38 mm/class CC (3NC1 093, 3NW7 533-0HG) or MCB 3P (5SY) 								
	1	1000		5ST3 710-0HG		1	1 unit	005	0.850
	<ul style="list-style-type: none"> For fuse holders 14 x 51 mm (3NC1 493, 3NW7 131) or MCB 1P (5SY, 5SP) with AS or FC 								
	1.5	1000		5ST3 714-0HG		1	1 unit	005	0.850
5ST3 7...-HG busbars according to UL 508, 25 mm², can be cut, without end caps									
	Single-phase								
	<ul style="list-style-type: none"> For fuse holders 14 x 51 mm (3NC1 491, 3NW7 111) or MCB 1P (5SP) 								
	1.5	1000		5ST3 701-2HG		1	1 unit	005	0.340
	Two-phase								
	<ul style="list-style-type: none"> For fuse holders 14 x 51 mm (3NC1 492, 3NW7 121) or MCB 2P (5SP) 								
	1.5	1000		5ST3 705-2HG		1	1 unit	005	0.800
	Three-phase								
	<ul style="list-style-type: none"> For fuse holders 14 x 51 mm (3NC1 493, 3NW7 131) or MCB 3P (5SP) 								
	1.5	1000		5ST3 710-2HG		1	1 unit	005	1.090
End caps for 5ST3 7...-HG									
	<ul style="list-style-type: none"> For single-phase busbars 								
				5ST3 748-0HG		1	10 units	005	0.001
	<ul style="list-style-type: none"> For two- and three-phase busbars 								
				5ST3 750-0HG		1	10 units	005	0.002
Terminals according to UL 508									
	Infeed to device								
	<ul style="list-style-type: none"> 35 mm² 								
				5ST3 770-0HG		1	10 units	005	0.035
	Infeed to busbar								
	<ul style="list-style-type: none"> 50 mm² 								
				5ST3 770-1HG		1	10 units	005	0.035
	Touch protection cover for busbars according to UL 508								
	<ul style="list-style-type: none"> 5 x 1 pin 								
				5ST3 655-0HG		1	10 units	005	0.005

Fuse Systems

LV HRC Fuse Systems

LV HRC fuse links

Overview

LV HRC fuse systems (NH type) are used for installation systems in non-residential, commercial and industrial buildings as well as in switchgear assemblies of power utilities. They therefore protect essential building parts and systems.

LV HRC fuse systems (NH type) are fuse systems designed for operation by experts. There are no constructional requirements for non-interchangeability of rated current and touch protection.

The components and auxiliary equipment are designed in such a way as to ensure the safe replacement of LV HRC fuse systems or isolation of systems.

LV HRC fuse links are available in the sizes 000, 00, 0, 1, 2, 3, 4 and 4a.


LV HRC fuse links are available in the following operational classes:

- gG for cable and line protection
- aM for short-circuit protection of switching devices in motor circuits
- gR or aR for protection of power semiconductors
- gS: The new gS operational class combines cable and line protection with semiconductor protection

LV HRC fuse links of size 000 can also be used in LV HRC fuse bases, LV HRC fuse switch disconnectors, LV HRC fuse strips as well as LV HRC in-line fuse switch disconnectors of size 00.


The fuse links 300 A, 355 A and 425 A comply with the standard but do not have the VDE mark.

LV HRC components:

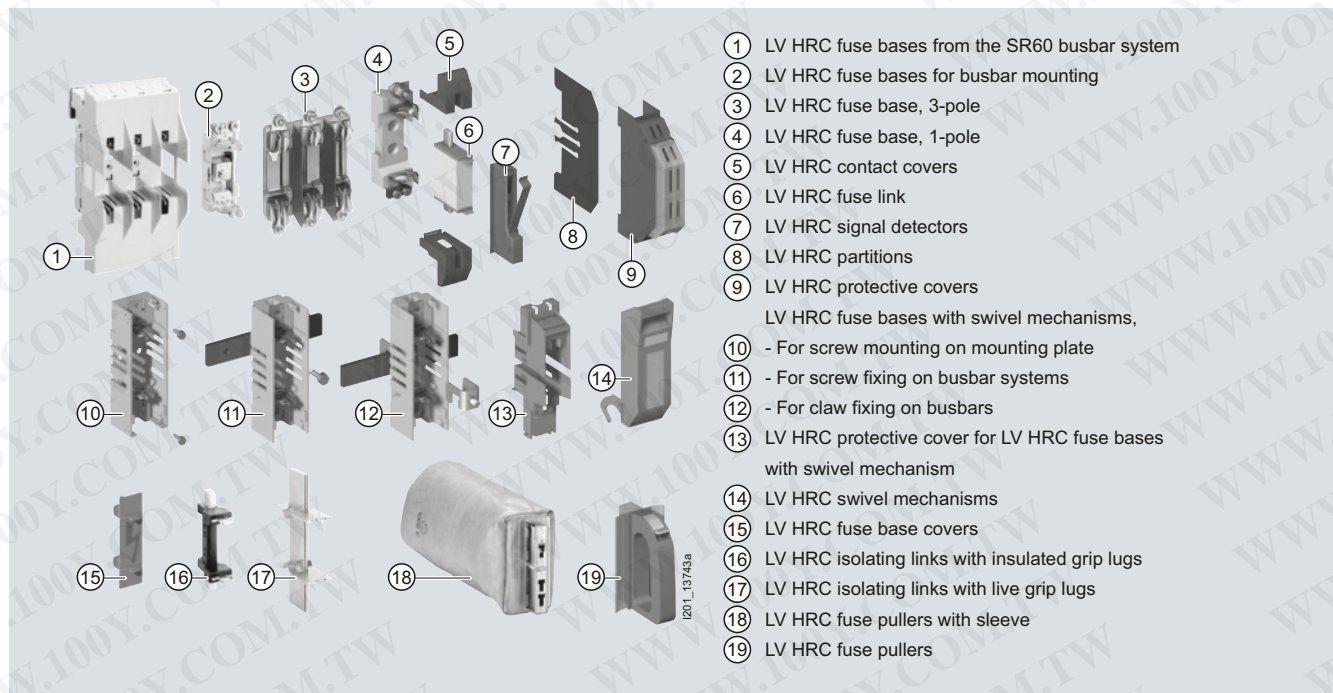

Benefits



- LV HRC fuse links with combination alarm signal the tripping of a fuse by a clear color change from red to white. This enables fast identification and replacement of the tripped fuse links. This increases system availability
- The insulated grip lugs made of metal are integrated in the top and bottom covers of the fuse link in molded plastic and provide greater safety during replacement. The mark shown below indicates that the grip lugs are insulated 
- In the standard series with front indicator, the front-mounted red indicator signals the tripping of a fuse
- LV HRC fuse links are always equipped with silver-plated contact pins. This means that they are non-corroding and have less contact resistance. This ensures the long-term operational safety of the plant

Technical specifications

	LV HRC fuse links					
	Operational class					Operational class
	gG					aM
	3NA6 ...-4 3NA6 ...-4KK 3NA3 83.-8	3NA6 ... 3NA6 ...-7 3NA7 ... 3NA7 ...-7	3NA3 ... 3NA3 ...-7	3NA6 ...-6 3NA7 ...-6	3NA3 ...-6	3ND1 3ND2
Standards Approvals	IEC 60269-1, -2; EN 60269-1 CSA 22.2 No.106, File Number 016325_0_00 (CSA approval of fuses 500 V for 600 V)					
Rated voltage U_n						
• Sizes 000 and 00	V AC V DC	400 --	500 250	500 250	690 250	690 250
• Sizes 1 and 2	V AC V DC	400 --	500 440	500 440	690 440	690 440
• Size 3	V AC V DC	-- --	-- --	500 440	-- --	690 440
• Sizes 4 and 4a (IEC design)	V AC V DC	-- --	-- --	500 440	-- --	-- --
Rated current I_n	A	10 ... 400	2 ... 400	2 ... 1250	2 ... 315	2 ... 500
Rated breaking capacity	KA AC KA DC	120 --	-- 25	-- --	-- --	-- --
Contact pins		Non-corroding, silver-plated				
Resistance to climate	°C	-20 ... +50 at 95 % relative humidity				

Fuse Systems

LV HRC Fuse Systems





LV HRC fuse links

Selection and ordering data

Sizes	Mounting width mm	I_n A	U_n V AC/V DC	DT	Insulated grip lugs		PU (UNIT, SET, M)	PS*/ P. unit	PG	Weight per PU approx. kg				
					Order No.	Price per PU								
LV HRC fuse links with combination alarm, operational class gG														
000	21	10	400/--							3NA6 803-4	1	3 units	017	0.127
		16								3NA6 805-4	1	3 units	017	0.128
		20								3NA6 807-4	1	3 units	017	0.128
		25								3NA6 810-4	1	3 units	017	0.128
		32								3NA6 812-4	1	3 units	017	0.128
		35								3NA6 814-4	1	3 units	017	0.123
		40								3NA6 817-4	1	3 units	017	0.113
		50								3NA6 820-4	1	3 units	017	0.125
		63								3NA6 822-4	1	3 units	017	0.126
		80								3NA6 824-4	1	3 units	017	0.124
100	3NA6 830-4	1	3 units	017	0.120									
00	30	80	400/--							3NA6 824-4KK	1	3 units	017	0.201
		100								3NA6 830-4KK	1	3 units	017	0.204
		125								3NA6 832-4	1	3 units	017	0.193
		160								3NA6 836-4	1	3 units	017	0.206
1	30	35	400/--							3NA6 114-4	1	3 units	017	0.293
		40								3NA6 117-4	1	3 units	017	0.290
		50								3NA6 120-4	1	3 units	017	0.287
		63								3NA6 122-4	1	3 units	017	0.294
		80								3NA6 124-4	1	3 units	017	0.288
		100								3NA6 130-4	1	3 units	017	0.278
	47.2	125								3NA6 132-4	1	3 units	017	0.276
		160								3NA6 136-4	1	3 units	017	0.295
		200								3NA6 140-4	1	3 units	017	0.421
		224								3NA6 142-4	1	3 units	017	0.442
		250								3NA6 144-4	1	3 units	017	0.420
2	47.2	50	400/--							3NA6 220-4	1	3 units	017	0.460
		63								3NA6 222-4	1	3 units	017	0.461
		80								3NA6 224-4	1	3 units	017	0.460
		100								3NA6 230-4	1	3 units	017	0.461
		125								3NA6 232-4	1	3 units	017	0.457
		160								3NA6 236-4	1	3 units	017	0.463
	57.8	200								3NA6 240-4	1	3 units	017	0.462
		224								3NA6 242-4	1	3 units	017	0.441
		250								3NA6 244-4	1	3 units	017	0.464
		300								3NA6 250-4	1	3 units	017	0.666
		315								3NA6 252-4	1	3 units	017	0.619
		355								3NA6 254-4	1	3 units	017	0.660
400	3NA6 260-4	1	3 units	017	0.662									



5





Sizes	Mounting width mm	I_n A	U_n V AC/ V DC	DT	Non-insulated grip lugs			Insulated grip lugs													
					Order No.	Price per PU	PG	DT	Order No.	Price per PU	PU (UNIT, SET, M)	PS*/P. unit	PG	Weight per PU approx. kg							
LV HRC fuse links with combination alarm, operational class gG																					
	000	21	2	500/	▶	3NA7 802	017	▶	3NA6 802	1	3 units	017	0.130								
			4	250										3NA7 804	017	▶	3NA6 804	1	3 units	017	0.126
			6											3NA7 801	017	▶	3NA6 801	1	3 units	017	0.116
			10											3NA7 803	017	▶	3NA6 803	1	3 units	017	0.128
			16											3NA7 805	017	▶	3NA6 805	1	3 units	017	0.129
			20											3NA7 807	017	▶	3NA6 807	1	3 units	017	0.128
			25											3NA7 810	017	▶	3NA6 810	1	3 units	017	0.121
			32											3NA7 812	017	▶	3NA6 812	1	3 units	017	0.129
			35											3NA7 814	017	▶	3NA6 814	1	3 units	017	0.129
			40											3NA7 817	017	▶	3NA6 817	1	3 units	017	0.123
			50											3NA7 820	017	▶	3NA6 820	1	3 units	017	0.124
			63											3NA7 822	017	▶	3NA6 822	1	3 units	017	0.125
80		3NA7 824	017	▶	3NA6 824	1	3 units	017	0.128												
100		3NA7 830	017	▶	3NA6 830	1	3 units	017	0.124												
	00	30	80	500/	▶	3NA7 824-7	017	▶	3NA6 824-7	1	3 units	017	0.182								
			100	250										3NA7 830-7	017	▶	3NA6 830-7	1	3 units	017	0.202
			125											3NA7 832	017	▶	3NA6 832	1	3 units	017	0.206
			160											3NA7 836	017	▶	3NA6 836	1	3 units	017	0.194
	1	30	16	500/	▶	3NA7 105	017	▶	3NA6 105	1	3 units	017	0.305								
			20	440										3NA7 107	017	▶	3NA6 107	1	3 units	017	0.286
			25											3NA7 110	017	▶	3NA6 110	1	3 units	017	0.290
			35											3NA7 114	017	▶	3NA6 114	1	3 units	017	0.284
			40											3NA7 117	017	▶	3NA6 117	1	3 units	017	0.295
			50											3NA7 120	017	▶	3NA6 120	1	3 units	017	0.288
			63											3NA7 122	017	▶	3NA6 122	1	3 units	017	0.281
			80											3NA7 124	017	▶	3NA6 124	1	3 units	017	0.289
			100											3NA7 130	017	▶	3NA6 130	1	3 units	017	0.290
			125											3NA7 132	017	▶	3NA6 132	1	3 units	017	0.292
			160											3NA7 136	017	▶	3NA6 136	1	3 units	017	0.283
			200											3NA7 140	017	▶	3NA6 140	1	3 units	017	0.442
			224											3NA7 142	017	▶	3NA6 142	1	3 units	017	0.439
			250											3NA7 144	017	▶	3NA6 144	1	3 units	017	0.419
	2	47.2	35	500/	▶	3NA7 214	017	▶	3NA6 214	1	3 units	017	0.435								
			50	440										3NA7 220	017	▶	3NA6 220	1	3 units	017	0.435
			63											3NA7 222	017	▶	3NA6 222	1	3 units	017	0.460
			80											3NA7 224	017	▶	3NA6 224	1	3 units	017	0.459
			100											3NA7 230	017	▶	3NA6 230	1	3 units	017	0.434
			125											3NA7 232	017	▶	3NA6 232	1	3 units	017	0.463
			160											3NA7 236	017	▶	3NA6 236	1	3 units	017	0.462
			200											3NA7 240	017	▶	3NA6 240	1	3 units	017	0.437
			224											3NA7 242	017	▶	3NA6 242	1	3 units	017	0.462
			250											3NA7 244	017	▶	3NA6 244	1	3 units	017	0.463
			300											--			3NA6 250	1	3 units	017	0.656
			315											3NA7 252	017	▶	3NA6 252	1	3 units	017	0.627
			355											--			3NA6 254	1	3 units	017	0.657
			400											3NA7 260	017	▶	3NA6 260	1	3 units	017	0.659





Fuse Systems

LV HRC Fuse Systems

LV HRC fuse links

5





Sizes	Mounting width mm	I_n A	U_n V AC/ DC	DT	Non-insulated grip lugs Order No.	Price per PU	PU (UNIT, SET, M)	PS*/ P. unit	PG	Weight per PU approx. kg		
LV HRC fuse links with front indicator, operational class gG												
	000	21	2	500/250	▶	3NA3 802	1	3 units	017	0.122		
					▶	3NA3 804	1	3 units	017	0.125		
					▶	3NA3 801	1	3 units	017	0.121		
					▶	3NA3 803	1	3 units	017	0.130		
					▶	3NA3 805	1	3 units	017	0.123		
					▶	3NA3 807	1	3 units	017	0.120		
					▶	3NA3 810	1	3 units	017	0.123		
					▶	3NA3 812	1	3 units	017	0.124		
					▶	3NA3 814	1	3/90 units	017	0.129		
					▶	3NA3 817	1	3 units	017	0.127		
					▶	3NA3 820	1	3/90 units	017	0.122		
					▶	3NA3 822	1	3/90 units	017	0.124		
					▶	3NA3 824	1	3/90 units	017	0.128		
					▶	3NA3 830	1	3/90 units	017	0.124		
								400/250	▶	3NA3 832-8	1	3/60 units
			▶	3NA3 836-8	1	3/60 units	017		0.160			
	00	30	35	500/250	▶	3NA3 814-7	1	3 units	017	0.190		
					▶	3NA3 820-7	1	3 units	017	0.189		
					▶	3NA3 822-7	1	3 units	017	0.190		
					▶	3NA3 824-7	1	3 units	017	0.198		
					▶	3NA3 830-7	1	3 units	017	0.191		
					▶	3NA3 832	1	3 units	017	0.192		
					▶	3NA3 836	1	3 units	017	0.189		
	0	30	6	500/440	▶	3NA3 001	1	3 units	017	0.266		
					▶	3NA3 003	1	3 units	017	0.244		
					▶	3NA3 005	1	3 units	017	0.255		
					▶	3NA3 007	1	3 units	017	0.253		
					▶	3NA3 010	1	3 units	017	0.258		
					▶	3NA3 012	1	3 units	017	0.270		
					▶	3NA3 014	1	3 units	017	0.271		
					▶	3NA3 017	1	3 units	017	0.253		
					▶	3NA3 020	1	3 units	017	0.266		
					▶	3NA3 022	1	3 units	017	0.271		
					▶	3NA3 024	1	3 units	017	0.256		
					▶	3NA3 030	1	3 units	017	0.260		
					▶	3NA3 032	1	3 units	017	0.259		
▶	3NA3 036	1	3 units	017	0.272							
	1	30	16	500/440	▶	3NA3 105	1	3 units	017	0.283		
					▶	3NA3 107	1	3 units	017	0.285		
					▶	3NA3 110	1	3 units	017	0.275		
					▶	3NA3 114	1	3 units	017	0.283		
					▶	3NA3 117	1	3 units	017	0.275		
					▶	3NA3 120	1	3 units	017	0.280		
					▶	3NA3 122	1	3 units	017	0.284		
					▶	3NA3 124	1	3 units	017	0.269		
					▶	3NA3 130	1	3 units	017	0.270		
					▶	3NA3 132	1	3 units	017	0.271		
					▶	3NA3 136	1	3 units	017	0.290		
					▶	3NA3 140	1	3 units	017	0.412		
					▶	3NA3 142	1	3 units	017	0.411		
					▶	3NA3 144	1	3 units	017	0.447		
		47.2	200	▶								
					224	▶						
							250	▶				

Sizes	Mounting width mm	I_n A	U_n V AC/ DC	DT	Non-insulated grip lugs		Price per PU	PU (UNIT, SET, M)	PS*/ P. unit	PG	Weight per PU approx. kg
					Order No.						
LV HRC fuse links with front indicator, operational class gG											
	47.2	35	500/440		3NA3 214			1 3 units	017	0.454	
		50		3NA3 220	1 3 units	017		0.420			
		63		3NA3 222	1 3 units	017		0.433			
		80		3NA3 224	1 3 units	017		0.431			
		100		3NA3 230	1 3 units	017		0.430			
		125		3NA3 232	1 3 units	017		0.429			
		160		3NA3 236	▶	1 3 units		017	0.432		
		200		3NA3 240	▶	1 3 units		017	0.427		
		224		3NA3 242	▶	1 3 units		017	0.432		
		250		3NA3 244	▶	1 3 units		017	0.440		
		300		3NA3 250		1 3 units		017	0.626		
		315		3NA3 252	▶	1 3 units		017	0.625		
		355		3NA3 254	▶	1 3 units		017	0.617		
		400		3NA3 260	▶	1 3 units		017	0.624		
				57.8	200	500/440			3NA3 340		1 3 units
224	3NA3 342		1 3 units		017		0.625				
250	3NA3 344		1 3 units		017		0.632				
300	3NA3 350		1 3 units		017		0.626				
315	3NA3 352		▶		1 3 units		017	0.632			
355	3NA3 354				1 3 units		017	0.666			
400	3NA3 360		▶		1 3 units		017	0.677			
425	3NA3 362				1 3 units		017	0.892			
500	3NA3 365		▶		1 3 units		017	0.880			
630	3NA3 372		▶		1 3 units		017	0.885			
Can only be used for 3NH3 530 LV HRC fuse base											
	101.8	630	500/440		3NA3 472		1 1 unit	017	2.577		
		800		3NA3 475	1 1 unit	017	2.580				
		1000		3NA3 480	1 1 unit	017	2.584				
		1250		3NA3 482	1 1 unit	017	2.608				
Only for base LV HRC 3NH7 520 or usable for fuse switch disconnecter with in-line design 3NJ56 43-0BB00											
	101.8	500	500/440		3NA3 665		1 1 unit	017	2.692		
		630		3NA3 672	1 1 unit	017	2.694				
		800		3NA3 675	1 1 unit	017	2.707				
		1000		3NA3 680	1 1 unit	017	2.708				
		1250		3NA3 682	1 1 unit	017	2.748				

Fuse Systems






LV HRC Fuse Systems

LV HRC fuse links

Sizes	Mounting width mm	I_n A	U_n V AC/ V DC	DT	Non-insulated grip lugs			Insulated grip lugs													
					Order No.	Price per PU	PG	DT	Order No.	Price per PU	PU (UNIT, SET, M)	PS*/P. unit	PG	Weight per PU approx. kg							
LV HRC fuse links with combination alarm, operational class gG																					
	000	21	2	690/	017	017	017	3NA6 802-6	1	3	units	017	0.122								
			4	250										017	017	3NA6 804-6	1	3	units	017	0.130
			6											017	017	3NA6 801-6	1	3	units	017	0.122
			10											017	017	3NA6 803-6	1	3	units	017	0.124
			16											017	017	3NA6 805-6	1	3	units	017	0.123
			20											017	017	3NA6 807-6	1	3	units	017	0.128
			25											017	017	3NA6 810-6	1	3	units	017	0.120
			32											017	017	3NA6 812-6	1	3	units	017	0.128
35		017	017	3NA6 814-6	1	3	units	017	0.129												
	00	30	40	690/	017	017	017	3NA6 817-6	1	3	units	017	0.203								
			50	250										017	017	3NA6 820-6	1	3	units	017	0.196
			63											017	017	3NA6 822-6	1	3	units	017	0.202
			80											017	017	3NA6 824-6	1	3	units	017	0.187
			100											017	017	3NA6 830-6	1	3	units	017	0.202
	1	30	50	690/	017	017	017	3NA6 120-6	1	3	units	017	0.271								
			63	440										017	017	3NA6 122-6	1	3	units	017	0.280
			80											017	017	3NA6 124-6	1	3	units	017	0.284
			100											017	017	3NA6 130-6	1	3	units	017	0.291
			125											017	017	3NA6 132-6	1	3	units	017	0.282
			160											017	017	3NA6 136-6	1	3	units	017	0.293
			200											017	017	3NA6 140-6	1	3	units	017	0.439
	2	47.2	80	690/	017	017	017	3NA6 224-6	1	3	units	017	0.460								
			100	440										017	017	3NA6 230-6	1	3	units	017	0.462
			125											017	017	3NA6 232-6	1	3	units	017	0.436
			160											017	017	3NA6 236-6	1	3	units	017	0.439
			200											017	017	3NA6 240-6	1	3	units	017	0.455
			224											017	017	3NA6 242-6	1	3	units	017	0.656
			250											017	017	3NA6 244-6	1	3	units	017	0.658
			300											017	017	3NA6 250-6	1	3	units	017	0.661
			315											017	017	3NA6 252-6	1	3	units	017	0.627

5

LV HRC fuse links

Sizes	Mounting width mm	I_n A	U_n V AC/ DC	DT	Non-insulated grip lugs	Price per PU	PU (UNIT, SET, M)	PS*/ P. unit	PG	Weight per PU approx. kg								
					Order No.													
LV HRC fuse links with front indicator, operational class gG																		
	000	21	690/250	2	▶	3NA3 802-6	1	3 units	017	0.127								
				4	▶	3NA3 804-6												
				6	▶	3NA3 801-6												
				10	▶	3NA3 803-6												
				16	▶	3NA3 805-6												
				20	▶	3NA3 807-6												
				25	▶	3NA3 810-6												
				32	▶	3NA3 812-6												
				35	▶	3NA3 814-6												
					00	30					690/250	40	▶	3NA3 817-6	1	3 units	017	0.190
50	▶	3NA3 820-6																
63	▶	3NA3 822-6																
80	▶	3NA3 824-6																
100	▶	3NA3 830-6																
	1	30	690/440	50	▶	3NA3 120-6	1	3 units	017	0.285								
				63	▶	3NA3 122-6												
				80	▶	3NA3 124-6												
				100	▶	3NA3 130-6												
				125	▶	3NA3 132-6												
				160	▶	3NA3 136-6												
				47.2	▶	3NA3 140-6												
					2	47.2					690/440	80	▶	3NA3 224-6	1	3 units	017	0.455
												100	▶	3NA3 230-6				
												125	▶	3NA3 232-6				
160	▶	3NA3 236-6																
200	▶	3NA3 240-6																
57.8	▶	3NA3 242-6																
224	▶	3NA3 244-6																
250	▶	3NA3 250-6																
300	▶	3NA3 252-6																
315	▶	3NA3 252-6																
	3	57.8	690/440	250	▶	3NA3 344-6	1	3 units	017	0.659								
				315	▶	3NA3 352-6												
				355	▶	3NA3 354-6												
				400	▶	3NA3 360-6												
				425	▶	3NA3 362-6												
				500	▶	3NA3 365-6												





* You can order this quantity or a multiple thereof.

Fuse Systems

LV HRC Fuse Systems

LV HRC fuse links

5

Sizes	Mounting width mm	I_n A	U_n V AC/ DC	DT	Non-insulated grip lugs Order No.	Price per PU	PU (UNIT, SET, M)	PS*/ P. unit	PG	Weight per PU approx. kg			
LV HRC fuse links with front indicator, operational class aM													
	000	21	6	500/--		3ND1 801		1 3 units	017	0.114			
			10			3ND1 803					1 3 units	017	0.127
			16			3ND1 805					1 3 units	017	0.129
			20			3ND1 807					1 3 units	017	0.128
			25			3ND1 810					1 3 units	017	0.122
			32			3ND1 812					1 3 units	017	0.130
			35			3ND1 814					1 3 units	017	0.123
			40			3ND1 817					1 3 units	017	0.123
			50			3ND1 820					1 3 units	017	0.134
			63			3ND1 822					1 3 units	017	0.122
80	3ND1 824	1 3 units	017	0.129									
	00	30	100	500/--		3ND1 830		1 3 units	017	0.177			
			125			3ND1 832					1 3 units	017	0.189
			160			3ND1 836					1 3 units	017	0.199
	1	30	63	690/--		3ND2 122		1 3 units	017	0.284			
			80			3ND2 124					1 3 units	017	0.281
			100			3ND2 130					1 3 units	017	0.276
			47.2			3ND2 132					1 3 units	017	0.405
			125			3ND2 136					1 3 units	017	0.440
			160			3ND2 140					1 3 units	017	0.441
200	3ND2 144	1 3 units	017	0.420									
250													
	2	47.2	125	690/--		3ND2 232		1 3 units	017	0.428			
			160			3ND2 236					1 3 units	017	0.435
			200			3ND2 240					1 3 units	017	0.453
			250			3ND2 244					1 3 units	017	0.450
			57.8			3ND2 252					1 3 units	017	0.634
			315			3ND2 254					1 3 units	017	0.654
355	3ND2 260	1 3 units	017	0.629									
400													
	3	57.8	315	690/--		3ND2 352		1 3 units	017	0.638			
			355			3ND2 354					1 3 units	017	0.664
			400			3ND2 360					1 3 units	017	0.633
			71.2			3ND1 365					1 3 units	017	0.980
			500			3ND1 372					1 3 units	017	0.980
			630										

Overview

LV HRC signal detectors are used for remotely indicating that the LV HRC fuse links have been tripped. Three different solutions are available:


- 3NX1 021 signal detectors with signal detector link
The LV HRC signal detectors with signal detector link support monitoring of LV HRC fuse links with non-insulated grip lugs of sizes 000 to 4 at 10 A or more. The signal detector link is connected in parallel to the LV HRC fuse link. In the event of a fault, the LV HRC fuse links are released simultaneously with the fuse detector link A tripping pin switches a floating micro-switch
- 3NX1 024 signal detector top
The signal detector top can be used with LV HRC fuse links, sizes 000, 00, 1 and 2, which are equipped with non-insulated grip lugs and have a front indicator or combination alarm. It is simply plugged into the grip lugs
- 5TT3 170 fuse monitor
If a fuse is tripped, the front indicator springs open and switches a floating microswitch. This solution should not be used for safety-relevant systems. For this purpose, we recommend our electronic fuse monitors

Benefits

Uniform solution for all sizes

LV HRC signal detectors reliably indicate when a fuse has tripped. Tripped fuses are quickly located. This saves time and increases system availability.

The LV HRC signal detector top is a cost-effective solution for the monitoring of Siemens LV HRC fuse links of sizes 000, 00, 1 and 2.

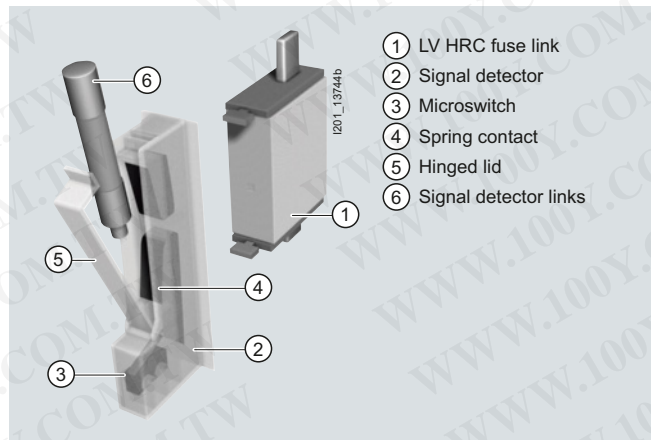





Fuse Systems

LV HRC Fuse Systems

LV HRC signal detectors

Selection and ordering data

	Sizes	DT	Order No.	Price per PU	PU (UNIT, SET, M)	PS*/P. unit	PG	Weight per PU approx.
								kg
	000 ... 4		3NX1 021		1	1 unit	017	0.039
			LV HRC signal detectors Only for SIEMENS 3NA3, 3NA7 and 3ND LV HRC fuse links with non-insulated grip lugs <ul style="list-style-type: none"> Rated voltage up to 690 V AC/600 V DC Contact: microswitches 250 V AC, 6 A Connection: flat termination 2.3 mm 					
	000 ... 4		3NX1 022		1	3 units	017	0.014
			Signal detector links <ul style="list-style-type: none"> Rated voltage up to 690 V AC/600 V DC Response value > 9 V; 2.5 A; for standard applications Response value > 2 V; 7 A; only for meshed networks					
	000, 00, 1, 2 ▶		3NX1 024		1	1 unit	017	0.021
			Signal detector tops Only for SIEMENS 3NA3, 3NA7 and 3ND LV HRC fuse links with non-insulated grip lugs <ul style="list-style-type: none"> Rated voltage up to 690 V AC/600 V DC Contact: microswitch 230 V AC, 5 A, 1 CO Connection: flat termination 2.3 mm 					

U_e	I_n	U_c	Mounting width	DT	Order No.	Price per PU	PU (UNIT, SET, M)	PS*/P. unit	PG	Weight per PU approx.
V AC	A	V	MW							kg
230	4	3 AC 380 ... 415	2		5TT3 170		1	1 unit		0.153
 Fuse monitors For all low-voltage fuse systems. Can be used in asymmetric systems afflicted with harmonics and regenerative feedback motors. Signal also for disconnected loads.										

For more information on fuse monitors, see chapter "Monitoring devices —> Monitoring of electrical values".

Overview

Terminals for all applications



Flat terminals with screws are suitable for connecting busbars or cable lugs. They have a torsion-proof screw connection with shim, spring washer and nut. When tightening the nut, always ensure compliance with the specified torque due to the considerable leverage effect.


The double busbar terminal differs from the flat terminal in that it supports connection of two busbars, one on the top and one at the bottom of the flat terminal.



With the flat terminal with nut, terminal lug of the nut is torsion-proof. When tightening the nut, the torque must be observed because of the considerable leverage effect.



The plug-in terminal is equipped for connecting two conductors.

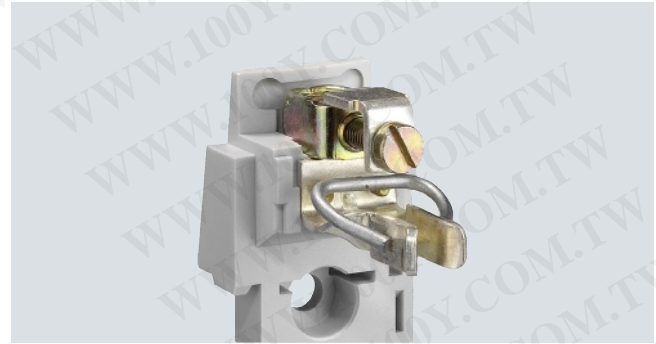

The modern box terminal ensures efficient and reliable connection to the conductors. They support connection of conductors with or without end sleeves.



Up to three conductors can be clamped to the terminal strip.



One conductor can be clamped to the saddle-type terminal.

Fuse Systems

LV HRC Fuse Systems

LV HRC sockets and accessories

Benefits



- The silver-plated Lyra contact provides a large contact area for the pin of the LV HRC fuse link. This improves heat transmission and lowers the temperature. It also minimizes the aging of the fuse link in the maximum load range, in particular when using SITOR fuses
- The large contact area also facilitates replacement of LV HRC fuse links
- The spring washer tensioning the contact is mechanically galvanized. This will prevent hydrogen embrittlement. The contact is resistant to aging and there will be no dreaded annealing of contacts, which considerably improves operating safety

Technical specifications

Size	LV HRC fuse bases, LV HRC bus-mounting bases						
	000/00	0	1	2	3	4	
Standards	IEC 60269-1, -2; EN 60269-1						
Rated current I_n	A	160	160	250	400	630	1250
Rated voltage U_n	V AC	690 ¹⁾	690 ¹⁾				690
	V DC	250	440				440
Rated short-circuit strength	kA AC	120					
	kA DC	25					
Max. power dissipation of fuse links	W	12	25	32	45	60	90
Flat terminal							
Screw		M8		M10		M12	
Nut		M8	--				
Max. tightening torque	Nm	14		38			65
Plug-in terminal							
Conductor cross-section	mm ²	2.5 ... 50		--			
Saddle-type terminal							
Conductor cross-section	mm ²	6 ... 70	--				
Box terminals							
Conductor cross-section	mm ²	2.5 ... 50					
Terminal strips							
Conductor cross-section, 3-wire	mm ²	1.5 ... 16	--				
Max. torque for attachment of LV HRC fuse base	Nm	2		2.5			--

¹⁾ Extended rated voltage up to 1000 V (except LV HRC bus-mounting bases).

Size	LV HRC fuse bases with swivel mechanism			
	000/00	1	3	4a
Rated voltage U_n	V AC	690		
	V DC	440		
Max. power dissipation of fuse links	W	12	32	48
Flat terminal				
Screw		M8	M10	M12
Nut		M8	--	
Max. tightening torque	Nm	14	38	65

Selection and ordering data

Sizes	I_n	Version	DT	Order No.	Price per PU	PU (UNIT, SET, M)	PS*/P. unit	PG	Weight per PU approx.		
									kg		
LV HRC fuse bases											
Made of molded plastic, for standard rail mounting or screw fixing											
	000/00	160	1P								
			With flat terminals, screw	▶	3NH3 051	1	1/10 units	017	0.149		
			With saddle-type terminals	▶	3NH3 052	1	1/10 units	017	0.010		
		125	With box terminals, up to 50 mm ²	▶	3NH3 053	1	1/10 units	017	0.118		
Made of ceramic for screw fixing											
	000/00	160	1P								
			With flat terminals, screw	▶	3NH3 030	1	3 units	017	0.217		
			With plug-in terminals		3NH3 031	1	3 units	017	0.260		
			With saddle-type terminals	▶	3NH3 032	1	3 units	017	0.204		
			With flat terminals and terminal strip		3NH3 035	1	3 units	017	0.229		
			With flat terminals, nut		3NH3 038	1	3 units	017	0.177		
			With flat and saddle-type terminals		3NH3 050	1	3 units	017	0.217		
			3P (incl. two partitions)								
			With flat terminals	▶	3NH4 030	1	1 unit	017	0.715		
			With plug-in terminals		3NH4 031	1	1 unit	017	0.883		
With saddle-type terminals		3NH4 032	1	1 unit	017	0.717					
With flat terminals and terminal strip		3NH4 035	1	1 unit	017	0.743					
Made of ceramic for screw fixing											
	0	160	1P								
			With flat terminals		3NH3 120	1	3 units	017	0.411		
			With plug-in terminals		3NH3 122	1	3 units	017	0.473		
Made of ceramic for screw fixing											
	1	250	1P								
			With flat terminals	▶	3NH3 230	1	3 units	017	0.738		
			With double busbar terminals		3NH3 220	1	3 units	017	0.737		
Ceramic supports on base plate for screw fixing											
	1	250	3P (incl. two partitions) With flat terminals		3NH4 230	1	1 unit	017	2.086		
Made of ceramic for screw fixing											
	2	400	1P								
			With flat terminals	▶	3NH3 330	1	1 unit	017	0.817		
			With double busbar terminals		3NH3 320	1	1 unit	017	0.819		
Made of ceramic for screw fixing											
	3	630	1P								
			With flat terminals	▶	3NH3 430	1	1 unit	017	1.077		
			With double busbar terminals		3NH3 420	1	1 unit	017	1.080		

LV HRC sockets and accessories

Sizes	I_n	Version	Order No.	Price per PU	PU (UNIT, SET, M)	PS*/P. unit	PG	Weight per PU approx. kg
LV HRC fuse bases with swivel mechanism								
	4a	1250 1P	3NH7 520		1	1 unit	017	5.428
With screw fixing for mounting plate								
LV HRC protective covers for LV HRC fuse bases								
As touch protection for contact pieces								
	000/00		▶ 3NX3 105		1	2/20 units	017	0.009
	0		▶ 3NX3 114		1	2/40 units	017	0.010
	1		▶ 3NX3 106		1	2/20 units	017	0.010
	2		▶ 3NX3 107		1	2/12 units	017	0.024
	3		▶ 3NX3 108		1	2/10 units	017	0.030
LV HRC partitions for LV HRC fuse bases								
As intermediate phase and end barrier								
	000/00	Type						
	0	3NH3 0/3NH4 0	▶ 3NX2 023		1	2 units	017	0.027
	1	3NH3 1	▶ 3NX2 030		1	2 units	017	0.033
	2	3NH3 2	▶ 3NX2 024		1	2 units	017	0.048
	3	3NH3 3	▶ 3NX2 025		1	2 units	017	0.063
		3NH3 4	▶ 3NX2 026		1	2 units	017	0.076
LV HRC protective covers IP2X for LV HRC fuse bases								
LV HRC protective covers								
	000/00	1P and 3P	3NX3 115		1	10 units	017	0.039
LV HRC protective hoods								
	000/00	When using fuse links with non-insulated grip lugs	3NX3 116		1	10 units	017	0.014
LV HRC protective covers for LV HRC bus-mounting bases								
As touch protection for contact pieces								
	000/00	Outgoing terminal	▶ 3NX3 105		1	2/20 units	017	0.009
		Incoming terminal	▶ 3NX3 113		1	2/50 units	017	0.006
LV HRC partitions for 3NH3 0 LV HRC bus-mounting bases								
As phase barrier								
	000/00		3NX2 027		1	2 units	017	0.018
As end barrier								
	000/00		3NX2 028		1	2/50 units	017	0.040

Fuse Systems

LV HRC Fuse Systems

LV HRC sockets and accessories

Sizes	Version	DT	Order No.	Price per PU	PU (UNIT, SET, M)	PS*/P. unit	PG	Weight per PU approx. kg
	Non-interrupted partitions 000/00 For 3NH4 0 LV HRC bus-mounting bases		3NX2 031		1	2/30 units	017	0.067
	Fuse base covers For LV HRC fuse bases, red, with inscription "Isolating point" 000/00 1, 2, 3		3NX1 003 3NX1 004		1 1	3 units 3 units	017 017	0.013 0.087
	Fuse pullers 000 ... 4 For LV HRC fuse links Without sleeve ▶ With sleeve ▶		3NX1 013 3NX1 014		1 1	1 unit 1 unit	017 017	0.301 0.558
	Isolating blades For LV HRC fuse bases and fuse switch disconnectors With insulated grip lugs 000/00 Silver-plated ▶ 0 1 ▶ 2 ▶ 3 ▶		3NG1 002 3NG1 102 3NG1 202 3NG1 302 3NG1 402		1 1 1 1 1	3/30 units 1/10 units 1/10 units 1/5 units 1/5 units	017 017 017 017 017	0.066 0.116 0.159 0.228 0.281
	With non-insulated grip lugs 4 Tinned 4a Nickel-plated		3NG1 503 3NG1 505		1 1	3 units 1/5 units	017 017	0.679 0.701

SITOR fuses for 3NH bases: Assignment table

3NH bases are generally suitable for all LV HRC type fuses. LV HRC type fuses for SITOR semiconductor protection can also be used, although it must be noted that, compared to cable and line protection fuses, these get much hotter during operation. The following table contains the permissible load currents of the SITOR fuses for installation in 3NH.

For installation in a base, it may therefore be necessary to operate the fuse under I_n (derating)

The values were determined using the conductor cross-sections specified in the table. If using smaller cross-sections, a considerably higher derating is required due to the lower heat dissipation.

SITOR fuse data						Permissible load currents of fuse when installed in: 3 NH		
Type	Rated current I_n	Rated voltage	Operational class	Size	Required conductor cross-section Cu	Type	Size	Permissible load current ¹⁾
--	A	V AC	--	--	mm ² Cu	--	--	A
3NC2 423..	150	500	gR	3	70	3NH3 430/20	3	150
3NC2 425..	200	500	gR	3	95	3NH3 430/20	3	190
3NC2 427..	250	500	gR	3	120	3NH3 430/20	3	240
3NC2 428..	300	500	gR	3	185	3NH3 430/20	3	285
3NC2 431..	350	500	gR	3	240	3NH3 430/20	3	330
3NC2 432..	400	500	aR	3	240	3NH3 430/20	3	400
3NC3 336-1	630	1000	aR	3	2 x (40 x 5)	3NH3 430/20	3	560
3NC3 337-1	710	1000	aR	3	2 x (50 x 5)	3NH3 430/20	3	600
3NC3 338-1	800	1000	aR	3	2 x (40 x 8)	3NH3 430/20	3	660
3NC3 340-1	900	1000	aR	3	2 x (40 x 8)	3NH3 430/20	3	750
3NC3 341-1	1000	1000	aR	3	2 x (50 x 8)	3NH3 430/20	3	850
3NC3 342-1	1100	800	aR	3	2 x (50 x 8)	3NH3 430/20	3	900
3NC3 343-1	1250	800	aR	3	2 x (50 x 8)	3NH3 430/20	3	950
3NC3 430-1	315	1250	aR	3	2 x 95	3NH3 430/20	3	310
3NC3 432-1	400	1250	aR	3	2 x 120	3NH3 430/20	3	390
3NC3 434-1	500	1250	aR	3	2 x 150	3NH3 430/20	3	460
3NC3 436-1	630	1250	aR	3	2 x (40 x 5)	3NH3 430/20	3	560
3NC3 438-1	800	1100	aR	3	2 x (40 x 8)	3NH3 430/20	3	690
3NC8 423..	150	660	gR	3	70	3NH3 430/20	3	135
3NC8 425..	200	660	gR	3	95	3NH3 430/20	3	180
3NC8 427..	250	660	gR	3	120	3NH3 430/20	3	250
3NC8 431..	350	660	gR	3	240	3NH3 430/20	3	315
3NC8 434..	500	660	gR	3	2 x 150	3NH3 430/20	3	450
3NC8 444..	1000	600	aR	3	2 x (60 x 6)	3NH3 430/20	3	800
3NE1 020-2	80	690	gR	00	25	3NH3 030/4 030	00	80
3NE1 021-0	100	690	gS	00	35	3NH3 030/4 030	00	100
3NE1 021-2	100	690	gR	00	35	3NH3 030/4 030	00	100
3NE1 022-0	125	690	gS	00	50	3NH3 030/4 030	00	125
3NE1 022-0	125	690	gR	00	50	3NH3 030/4 030	00	125
3NE1 224-0	160	690	gS	1	70	3NH3 230/4 230	1	160
3NE1 224-2/-3	160	690	gR	1	70	3NH3 230/4 230	1	160
3NE1 225-0	200	690	gS	1	95	3NH3 230/4 230	1	200
3NE1 225-2/-3	200	690	gR	1	95	3NH3 230/4 230	1	200
3NE1 227-0	250	690	gS	1	120	3NH3 230/4 230	1	250
3NE1 227-2/-3	250	690	gR	1	120	3NH3 230/4 230	1	250
3NE1 230-0	315	690	gS	1	2 x 70	3NH3 330/20	2	315
3NE1 230-2/-3	315	690	gR	1	2 x 70	3NH3 330/20	2	315
3NE1 331-0	350	690	gS	2	2 x 95	3NH3 330/20	2	350
3NE1 331-2/-3	350	690	gR	2	2 x 95	3NH3 330/20	2	350
3NE1 332-0	400	690	gS	2	2 x 95	3NH3 330/20	2	400
3NE1 332-2/-3	400	690	gR	2	2 x 95	3NH3 330/20	2	400
3NE1 333-0	450	690	gS	2	2 x 120	3NH3 430/20	3	450
3NE1 333-2/-3	450	690	gR	2	2 x 120	3NH3 430/20	3	450
3NE1 334-0	500	690	gS	2	2 x 120	3NH3 430/20	3	500
3NE1 334-2/-3	500	690	gR	2	2 x 120	3NH3 430/20	3	500
3NE1 435-0	560	690	gS	3	2 x 150	3NH3 430/20	3	560
3NE1 435-2/-3	560	690	gR	3	2 x 150	3NH3 430/20	3	560
3NE1 436-0	630	690	gS	3	2 x 185	3NH3 430/20	3	630
3NE1 436-2/-3	630	690	gR	3	2 x 185	3NH3 430/20	3	630
3NE1 437-0	710	690	gS	3	2 x (40 x 5)	3NH3 430/20	3	710
3NE1 437-1	710	600	gR	3	2 x (40 x 5)	3NH3 430/20	3	690
3NE1 437-2/-3	710	690	gR	3	2 x (40 x 5)	3NH3 430/20	3	710
3NE1 438-0	800	690	gS	3	2 x (50 x 5)	3NH3 430/20	3	800
3NE1 438-1	800	600	gR	3	2 x (50 x 5)	3NH3 430/20	3	750
3NE1 438-2/-3	800	690	gR	3	2 x (50 x 5)	3NH3 430/20	3	800
3NE1 447-2/-3	670	690	gR	3	2 x (40 x 5)	3NH3 430/20	3	670
3NE1 448-2/-3	850	690	gR	3	2 x (40 x 8)	3NH3 430/20	3	850
3NE1 802-0	40	690	gS	000	10	3NH3 030/4 030	00	40

¹⁾ In the case of cyclic loads, the currents may have to be further reduced (precise values on request).

Fuse Systems

LV HRC Fuse Systems

LV HRC sockets and accessories

5

SITOR fuse data						Permissible load currents of fuse when installed in: 3 NH		
Type	Rated current I_n	Rated voltage	Operational class	Size	Required conductor cross-section Cu	Type	Size	Permissible load current ¹⁾
--	A	V AC	--	--	mm ² Cu	--	--	A
3NE1 803-0	35	690	gS	000	6	3NH3 030/4 030	00	35
3NE1 813-0	16	690	gS	000	1.5	3NH3 030/4 030	00	16
3NE1 814-0	20	690	gS	000	2.5	3NH3 030/4 030	00	20
3NE1 815-0	25	690	gS	000	4	3NH3 030/4 030	00	25
3NE1 817-0	50	690	gS	000	10	3NH3 030/4 030	00	50
3NE1 818-0	63	690	gS	000	16	3NH3 030/4 030	00	63
3NE1 820-0	80	690	gS	000	25	3NH3 030/4 030	00	80
3NE3 221	100	1000	aR	1	35	3NH3 230/4 230	1	100
3NE3 222	125	1000	aR	1	50	3NH3 230/4 230	1	125
3NE3 224	160	1000	aR	1	70	3NH3 230/4 230	1	160
3NE3 225	200	1000	aR	1	95	3NH3 230/4 230	1	200
3NE3 227	250	1000	aR	1	120	3NH3 230/4 230	1	250
3NE3 230-0B	315	1000	aR	1	185	3NH3 330/20	2	305
3NE3 231	350	1000	aR	1	240	3NH3 330/20	2	335
3NE3 232-0B	400	1000	aR	1	230	3NH3 330/20	2	380
3NE3 233	450	1000	aR	1	2 x 150	3NH3 330/20	2	425
3NE3 332-0B	400	1000	aR	2	240	3NH3 430/20	3	400
3NE3 333	450	1000	aR	2	2 x 150	3NH3 430/20	3	450
3NE3 334-0B	500	1000	aR	2	2 x 150	3NH3 430/20	3	500
3NE3 335	560	1000	aR	2	2 x 185	3NH3 430/20	3	560
3NE3 336	630	1000	aR	2	2 x 185	3NH3 430/20	3	630
3NE3 337-8	710	900	aR	2	2 x (40 x 5)	3NH3 430/20	3	680
3NE3 338-8	800	800	aR	2	2 x 240	3NH3 430/20	3	700
3NE3 340-8	900	690	aR	2	2 x (40 x 8)	3NH3 430/20	3	750
3NE4 101	32	1000	gR	0	6	3NH3 120/4 230	0/1	32
3NE4 102	40	1000	gR	0	10	3NH3 120/4 230	0/1	40
3NE4 117	50	1000	gR	0	10	3NH3 120/4 230	0/1	50
3NE4 118	63	1000	aR	0	16	3NH3 120/4 230	0/1	63
3NE4 120	80	1000	aR	0	25	3NH3 120/4 230	0/1	80
3NE4 121	100	1000	aR	0	35	3NH3 120/4 230	0/1	100
3NE4 122	125	1000	aR	0	50	3NH3 120/4 230	0/1	125
3NE4 124	160	1000	aR	0	70	3NH3 120/4 230	0/1	160
3NE4 327-0B	250	800	aR	2	150	3NH3 330/20	2	240
3NE4 330-0B	315	800	aR	2	240	3NH3 330/20	2	300
3NE4 333-0B	450	800	aR	2	2 x (30 x 5)	3NH3 430/20	3	425
3NE4 334-0B	500	800	aR	2	2 x (30 x 5)	3NH3 430/20	3	475
3NE4 337	710	800	aR	2	2 x (50 x 5)	3NH3 430/20	3	630
3NE8 015-1	25	690	gR	00	4	3NH3 030/4 030	00	25
3NE8 003-1	35	690	gR	00	6	3NH3 030/4 030	00	35
3NE8 017-1	50	690	gR	00	10	3NH3 030/4 030	00	50
3NE8 018-1	63	690	gR	00	16	3NH3 030/4 030	00	63
3NE8 020-1	80	690	aR	00	25	3NH3 030/4 030	00	80
3NE8 021-1	100	690	aR	00	35	3NH3 030/4 030	00	100
3NE8 022-1	125	690	aR	00	50	3NH3 030/4 030	00	125
3NE8 024-1	160	690	aR	00	70	3NH3 030/4 030	00	160

¹⁾ In the case of cyclic loads, the currents may have to be further reduced (precise values on request).

Overview

SITOR fuses protect power semiconductors from the effects of short-circuits because the quick-acting tripping characteristic is much quicker than with conventional LV HRC fuse systems. They protect high-quality devices and system components, such as converters with fuses in the input and the DC link, UPS systems and soft starters for motors.

Panel mounting requirements have given rise to various connection versions and designs.

The fuses with blade contacts comply with IEC 60269-2 and are suitable for installation in LV HRC fuse bases, in LV HRC fuse switch disconnectors and switch disconnectors with fuses. They also include fuses with slotted blade contacts for screw fixing with 110 mm mounting dimension, whose sizes are according to IEC 60269-4.

Fuses with slotted blade contacts for screw fixing with 80 mm or 110 mm mounting dimension are often screwed directly onto busbars for optimum heat dissipation. Even better heat transmission is provided by the compact fuses with M10 or M12 female thread, which are also mounted directly onto busbars.

Bolt-on links with 80 mm mounting dimension are another panel-mounting version for direct busbar mounting.

The fuses for SITOR thyristor sets, railway rectifiers or electrolysis systems were developed specially for these applications.

LV HRC bases suitable for use with SITOR fuses and safety switching devices can be found on [page 5/45f](#).

Fuse characteristics, configuration notes and the assignments of SITOR fuses to the fuse bases and 3NP and 3KL fuse switching devices can be found in the Configuration Manual, "Fuse Systems" at: www.siemens.com/lowvoltage/manuals

The new size 3 type ranges have a round ceramic body instead of a square one. These series are characterized by small I^2t values with low power dissipation and high capability under alternating load. The dimensions and functional values correspond to the current standards IEC 60269-4/ EN 60269-4.

Note:

The ordering data of the fuses are listed in ascending order of the rated voltage in the selection tables.

Benefits

- SITOR fuses have a high varying load factor, which ensures a high level of operating safety and system availability - even when subject to constant load change.
- The use of SITOR fuses in LV HRC bases or Siemens switch disconnectors has been tested with regard to heat dissipation and maximum current loading. This makes planning and dimensioning easier and prevents consequential damage.
- Our high standard of quality ensures good compliance with the characteristic curve and accuracy. This ensures long-term protection of devices

Operational classes

Fuses are categorized according to function and operational classes. SITOR semiconductor fuses, in LV HRC (NH) design, are available in the following operational classes:

- aR: for the short-circuit protection of power semiconductors (partial range protection)
- gR: for the protection of power semiconductors (full range protection)
- gS: The gS operational class combines cable and line protection with semiconductor protection (full range protection).

Fuse Systems

SITOR Semiconductor Fuses

SITOR LV HRC design

Selection and ordering data

Sizes	I_e	U_e	Operational class	Breaking I^2t value	Power loss	Varying load factor	DT	Order No.	Price per PU	PU (UNIT, SET, M)	PS*/P. unit	PG	Weight per PU approx.
A		V AC		A ² s	W	WL							kg
SITOR LV HRC design													
With slotted blade contacts with 2 oblong slots for M10 screw fixing, mounting dimension: 110 mm, or for installation in LV HRC fuse bases or switch disconnectors													
3	150	500	gR	33 000	35	0.85		3NC2 423-0C		1 3 units	016	016	1.210
	200			64 000	40	0.85		3NC2 425-0C		1 3 units	016	016	1.210
	250			99 000	50	0.85		3NC2 427-0C		1 3 units	016	016	1.210
	300			132 000	65	0.85		3NC2 428-0C		1 3 units	016	016	1.210
	350			249 000	60	0.85		3NC2 431-0C		1 3 units	016	016	1.210
	400	aR		390 000	50	0.85		3NC2 432-0C		1 3 units	016	016	1.210
With slotted blade contacts for M10 screw fixing, mounting dimension: 110 mm, or for installation in LV HRC fuse bases or switch disconnectors													
3	150	500	gR	33 000	35	0.85		3NC2 423-3C		1 3 units	016	016	1.210
	200			64 000	40	0.85		3NC2 425-3C		1 3 units	016	016	1.210
	250			99 000	50	0.85		3NC2 427-3C		1 3 units	016	016	1.210
	300			132 000	65	0.85		3NC2 428-3C		1 3 units	016	016	1.210
	350			249 000	60	0.85		3NC2 431-3C		1 3 units	016	016	1.210
	400	aR		390 000	50	0.85		3NC2 432-3C		1 3 units	016	016	1.210
1	160	690	gR	18 600	30	1.0		3NE1 224-3		1 3 units	016	016	0.640
	200			51 800	28	1.0		3NE1 225-3		1 3 units	016	016	0.640
	250			80 900	35	1.0		3NE1 227-3		1 3 units	016	016	0.640
	315			168 000	42	1.0		3NE1 230-3		1 3 units	016	016	0.640
2	350	690	gR	177 000	44	1.0		3NE1 331-3		1 3 units	016	016	0.680
	400			224 000	54	1.0		3NE1 332-3		1 3 units	016	016	0.680
	450			276 500	62	1.0		3NE1 333-3		1 3 units	016	016	0.680
	500			398 000	65	1.0		3NE1 334-3		1 3 units	016	016	0.680
3	150	690	gR	17 600	40	0.85		3NC8 423-3C		1 3 units	016	016	1.220
	200			38 400	55	0.85		3NC8 425-3C		1 3 units	016	016	1.220
	250			70 400	72	0.85		3NC8 427-3C		1 3 units	016	016	1.220
	350			176 000	95	0.85		3NC8 431-3C		1 3 units	016	016	1.220
	500			448 000	130	0.85		3NC8 434-3C		1 3 units	016	016	1.220
	1000	600	aR	2 480 000	140	0.95		3NC8 444-3C		1 3 units	016	016	1.220
With slotted blade contacts for M12 screw fixing, mounting dimension: 110 mm, or for installation in LV HRC fuse bases or switch disconnectors													
3	560	690	gR	890 000	60	1.0		3NE1 435-3		1 3 units	016	016	0.690
	630			1 390 000	62	1.0		3NE1 436-3		1 3 units	016	016	0.690
	670			1 640 000	65	1.0		3NE1 447-3		1 3 units	016	016	0.690
	710			1 818 000	72	1.0		3NE1 437-3		1 3 units	016	016	0.690
	800			2 475 000	82	1.0		3NE1 438-3		1 3 units	016	016	0.690
	850			3 640 000	76	1.0		3NE1 448-3		1 3 units	016	016	0.690








5



Fuse Systems






SITOR Semiconductor Fuses

SITOR LV HRC design

Sizes	I_e	U_e	Operational class	Breaking I^2t value	Power loss	Varying load factor	DT	Order No.	Price per PU	PU (UNIT, SET, M)	PS*/P. unit	PG	Weight per PU approx.
A	V AC	A ² s	W	WL									kg
SITOR LV HRC design													
With slotted blade contacts for M12 screw fixing, mounting dimension: 80 mm													
	3	630	690 aR	244 000	120	0.85		3NC3 236-1		1	3 units	016	1.198
		710		346 000	130	0.85		3NC3 237-1		1	3 units	016	1.200
		800		498 000	135	0.9		3NC3 238-1		1	3 units	016	1.200
		900		677 000	145	0.9		3NC3 240-1		1	3 units	016	1.200
		1000		975 000	155	0.95		3NC3 241-1		1	3 units	016	1.200
		1100		1 382 000	165	0.95		3NC3 242-1		1	3 units	016	1.200
		1250		1 990 000	175	0.95		3NC3 243-1		1	3 units	016	1.200
		1400	500	2 100 000	200	0.95		3NC3 244-1		1	3 units	016	1.200
		1600		2 860 000	240	0.9		3NC3 245-1		1	3 units	016	1.200
	With slotted blade contacts with 2 oblong slots for M10 screw fixing, mounting dimension: 110 mm, or for installation in LV HRC fuse bases or switch disconnectors												
	3	150	690 gR	17 600	40	0.85		3NC8 423-0C		1	3 units	016	1.220
		200		38 400	55	0.85		3NC8 425-0C		1	3 units	016	1.220
		250		70 400	72	0.85		3NC8 427-0C		1	3 units	016	1.220
		350		176 000	95	0.85		3NC8 431-0C		1	3 units	016	1.220
		500		448 000	130	0.85		3NC8 434-0C		1	3 units	016	1.220
With blade contacts for mounting in LV HRC fuse bases or switch disconnectors													
	3	710	600 gR	2 460 000	65	1.0		3NE1 437-1		1	3 units	016	1.210
		800		3 350 000	72	1.0		3NE1 438-1		1	3 units	016	1.210
	000	16	690 gS	200	3.0	1.0	▶	3NE1 813-0		1	3 units	016	0.133
		20		430	3.5	1.0	▶▶	3NE1 814-0		1	3 units	016	0.124
		25		780	4.0	1.0	▶▶▶	3NE1 815-0		1	3 units	016	0.127
		35		1 700	5.0	1.0	▶▶▶▶	3NE1 803-0		1	3 units	016	0.128
		40		3 000	5.0	1.0	▶▶▶▶▶	3NE1 802-0		1	3 units	016	0.126
		50		4 400	6.0	1.0	▶▶▶▶▶▶	3NE1 817-0		1	3 units	016	0.129
		63		9 000	7.0	1.0	▶▶▶▶▶▶▶	3NE1 818-0		1	3 units	016	0.126
		80		18 000	8.0	1.0	▶▶▶▶▶▶▶▶	3NE1 820-0		1	3 units	016	0.124
	00	100	690 gS	33 000	10	1.0	▶▶▶▶▶▶▶▶▶	3NE1 021-0		1	3 units	016	0.204
		125		63 000	11	1.0	▶▶▶▶▶▶▶▶▶▶	3NE1 022-0		1	3 units	016	0.195
	1	160	690 gS	60 000	24	1.0	▶▶▶▶▶▶▶▶▶▶▶	3NE1 224-0		1	3 units	016	0.620
		200		100 000	27	1.0	▶▶▶▶▶▶▶▶▶▶▶▶	3NE1 225-0		1	3 units	016	0.630
		250		200 000	30	1.0	▶▶▶▶▶▶▶▶▶▶▶▶▶	3NE1 227-0		1	3 units	016	0.620
		315		310 000	38	1.0	▶▶▶▶▶▶▶▶▶▶▶▶▶▶	3NE1 230-0		1	3 units	016	0.630
	2	350	690 gS	430 000	42	1.0	▶▶▶▶▶▶▶▶▶▶▶▶▶▶▶	3NE1 331-0		1	3 units	016	0.830
		400		590 000	45	1.0	▶▶▶▶▶▶▶▶▶▶▶▶▶▶▶▶	3NE1 332-0		1	3 units	016	0.830
		450		750 000	53	1.0	▶▶▶▶▶▶▶▶▶▶▶▶▶▶▶▶▶	3NE1 333-0		1	3 units	016	0.850
		500		950 000	56	1.0	▶▶▶▶▶▶▶▶▶▶▶▶▶▶▶▶▶▶	3NE1 334-0		1	3 units	016	0.840
	3	560	690 gS	1 700 000	50	1.0	▶▶▶▶▶▶▶▶▶▶▶▶▶▶▶▶▶▶▶	3NE1 435-0		1	3 units	016	1.205
		630		2 350 000	55	1.0	▶▶▶▶▶▶▶▶▶▶▶▶▶▶▶▶▶▶▶▶	3NE1 436-0		1	3 units	016	1.210
		710		3 400 000	60	1.0	▶▶▶▶▶▶▶▶▶▶▶▶▶▶▶▶▶▶▶▶▶	3NE1 437-0		1	3 units	016	1.220
		800		5 000 000	59	1.0	▶▶▶▶▶▶▶▶▶▶▶▶▶▶▶▶▶▶▶▶▶▶	3NE1 438-0		1	3 units	016	1.220

5

* You can order this quantity or a multiple thereof.

Sizes	I_e	U_e	Operational class	Breaking I^2t value	Power loss	Varying load factor	DT	Order No.	Price per PU	PU (UNIT, SET, M)	PS*/P. unit	PG	Weight per PU approx.	
A	V	AC		A ² s	W	WL							kg	
SITOR LV HRC design														
With slotted blade contacts for M10 screw fixing, mounting dimension: 110 mm, or for installation in LV HRC fuse bases or switch disconnectors														
	2	250	800	aR	29 700	105	0.85	▶	3NE4 327-0B		1 3 units	016	0.840	
		315			60 700	120	0.85	▶	3NE4 330-0B		1 3 units	016	0.830	
		450			191 000	140	0.85	▶	3NE4 333-0B		1 3 units	016	0.820	
		500			276 000	155	0.85	▶	3NE4 334-0B		1 3 units	016	0.840	
		710			923 000	155	0.95	▶	3NE4 337		1 3 units	016	0.850	
	1	100	1000	aR	4 800	28	0.95		3NE3 221		1 3 units	016	0.620	
		125			7 200	36	0.95		3NE3 222		1 3 units	016	0.610	
		160			13 000	42	1.0	▶	3NE3 224		1 3 units	016	0.630	
		200			30 000	42	1.0	▶	3NE3 225		1 3 units	016	0.620	
		250			48 000	50	1.0	▶	3NE3 227		1 3 units	016	0.620	
		315			80 000	65	0.95	▶	3NE3 230-0B		1 3 units	016	0.630	
		350			100 000	75	0.95		3NE3 231		1 3 units	016	0.620	
		400			135 000	85	0.9		3NE3 232-0B		1 3 units	016	0.620	
		450			175 000	95	0.9	▶	3NE3 233		1 3 units	016	0.630	
	2	400	1000	aR	135 000	85	1.0		3NE3 332-0B		1 3 units	016	0.840	
		450			175 000	90	1.0		3NE3 333		1 3 units	016	0.830	
		500			260 000	90	1.0	▶	3NE3 334-0B		1 3 units	016	0.840	
		560			360 000	95	1.0	▶	3NE3 335		1 3 units	016	0.840	
		630			600 000	100	1.0	▶	3NE3 336		1 3 units	016	0.840	
		710	900	aR	800 000	105	1.0	▶	3NE3 337-8		1 3 units	016	0.850	
		800	800		850 000	130	0.95	▶	3NE3 338-8		1 3 units	016	0.840	
		900	690		920 000	165	0.95	▶	3NE3 340-8		1 3 units	016	0.850	
	With slotted blade contacts for M10 screw fixing, mounting dimension: 130 mm													
		3	100	1000	aR	13 500	25	1.0		3NE3 421-0C		1 3 units	016	1.120
		224			54 000	85	1.0		3NE3 626-0C		1 3 units	016	1.120	
		315			218 000	80	1.0		3NE3 430-0C		1 3 units	016	1.120	
		400			364 000	110	1.0		3NE3 432-0C		1 3 units	016	1.120	
		450			488 000	110	1.0		3NE3 635-0C		1 3 units	016	1.120	
		500			870 000	95	1.0		3NE3 434-0C		1 3 units	016	1.120	
		630			1 280 000	132	1.0		3NE3 636-0C		1 3 units	016	1.120	
		710			1 950 000	145	1.0		3NE3 637-0C		1 3 units	016	1.120	
With slotted blade contacts for M12 screw fixing, mounting dimension: 140 mm														
	3	710	1000	aR	1 950 000	145	1.0		3NE3 637-1C		1 3 units	016	1.120	
	With slotted blade contacts for M12 screw fixing, mounting dimension: 110 mm, or for installation in LV HRC fuse bases or switch disconnectors													
	3	630	1000	aR	418 000	145	0.85		3NC3 336-1		1 3 units	016	1.220	
		710			569 000	150	0.85		3NC3 337-1		1 3 units	016	1.220	
		800			819 000	155	0.85		3NC3 338-1		1 3 units	016	1.220	
		900			1 160 000	165	0.9		3NC3 340-1		1 3 units	016	1.200	
		1000			1 670 000	170	0.9		3NC3 341-1		1 3 units	016	1.220	
		1100	800		1 910 000	185	0.9		3NC3 342-1		1 3 units	016	1.220	
	1250			2 600 000	210	0.9		3NC3 343-1		1 3 units	016	1.220		
	3	315	1250	aR	72 500	80	0.95		3NC3 430-1		1 3 units	016	1.220	
		400			163 000	95	0.95		3NC3 432-1		1 3 units	016	1.010	
		500			290 000	115	0.90		3NC3 434-1		1 3 units	016	1.220	
		630			650 000	120	0.95		3NC3 436-1		1 3 units	016	1.220	
		800	1100		985 000	145	0.90		3NC3 438-1		1 3 units	016	1.220	




Fuse Systems

SITOR Semiconductor Fuses

SITOR LV HRC design

5



Sizes	I_e	U_e	Operational class	Breaking I^2t value	Power loss	Varying load factor	DT	Order No.	Price per PU	PU (UNIT, SET, M)	PS*/P. unit	PG	Weight per PU approx.
A	V AC			A ² s	W	WL							kg
SITOR LV HRC design													
With slotted blade contacts for M10 screw fixing, mounting dimension: 210 mm													
3	160	1500	aR	54 000	56	1.0		3NE5 424-0C		1	2 units	016	1.260
	224			138 000	80	1.0		3NE5 426-0C		1	2 units	016	1.220
	315			311 000	115	1.0		3NE5 430-0C		1	2 units	016	1.260
	350			428 000	135	1.0		3NE5 431-0C		1	2 units	016	1.260
	450			870 000	145	0.95		3NE5 433-0C		1	2 units	016	1.260
With slotted blade contacts for M12 screw fixing, mounting dimension: 210 mm													
	450	1500	aR	870 000	145	0.95		3NE5 433-1C		1	2 units	016	1.260
With slotted blade contacts for M10 screw fixing, mounting dimension: 170 mm													
3	250	1500	aR	84 000	130	1.0		3NE5 627-0C		1	3 units	016	1.240
	450			590 000	160	1.0		3NE5 633-0C		1	3 units	016	1.240
	600			1 950 000	145	1.0		3NE5 643-0C		1	3 units	016	1.240
With slotted blade contacts for M10 screw fixing, mounting dimension: 210 mm													
3	200	2000	aR	138 000	75	1.0		3NE7 425-0C		1	2 units	016	1.260
	250			218 000	110	1.0		3NE7 427-0C		1	2 units	016	1.220
	350			555 000	120	1.0		3NE7 431-0C		1	2 units	016	1.220
	400			870 000	150	1.0		3NE7 432-0C		1	2 units	016	1.260
	450			960 000	160	1.0		3NE7 633-0C		1	2 units	016	1.260
	630			1 950 000	220	1.0		3NE7 636-0C		1	2 units	016	1.220
With slotted blade contacts for M12 screw fixing, mounting dimension: 210 mm													
3	450	2000	aR	960 000	160	1.0		3NE7 633-1C		1	2 units	016	1.260
	525			1 120 000	210	1.0		3NE7 648-1C		1	2 units	016	1.220
	630			1 950 000	220	1.0		3NE7 636-1C		1	1 unit	016	1.260
	710			3 110 000	275	1.0		3NE7 637-1C		1	2 units	016	1.220
With slotted blade contacts for M12 screw fixing, mounting dimension: 260 mm													
3	125	2500	aR	34 500	78	1.0		3NE9 622-1C		1	1 unit	016	2.500
	400			620 000	205	1.0		3NE9 632-1C		1	1 unit	016	2.350
	500			1 270 000	235	1.0		3NE9 634-1C		1	1 unit	016	2.350
	630			2 800 000	275	1.0		3NE9 636-1C		1	1 unit	016	2.350

Sizes	I_e	U_e	Operational class	Breaking I^2t value	Power loss	Varying load factor	DT	Order No.	Price per PU	PU (UNIT, SET, M)	PS*/P. unit	PG	Weight per PU approx.
A	V	AC		A ² s	W	WL							kg
SITOR LV HRC design													
With M12 female thread at both ends for direct busbar mounting, flange dimensions 52 mm													
	3	630	690	aR	244 000	125	0.9	3NC3 236-6		1	3 units	016	1.160
		710			346 000	130	0.9	3NC3 237-6		1	3 units	016	1.160
		800			498 000	135	0.95	3NC3 238-6		1	3 units	016	1.160
		900			677 000	140	0.95	3NC3 240-6		1	3 units	016	1.160
		1000			975 000	145	1.0	3NC3 241-6		1	3 units	016	1.160
		1100			1 382 000	150	1.0	3NC3 242-6		1	3 units	016	1.160
		1250			1 990 000	155	1.0	3NC3 243-6		1	3 units	016	1.160
		1400	500		2 100 000	175	1.0	3NC3 244-6		1	3 units	016	1.160
		1600			2 860 000	195	0.95	3NC3 245-6		1	3 units	016	1.160
	With M10 female thread at both ends for direct busbar mounting, flange dimensions 109 mm												
	3	450	1000	aR	488 000	110	1.0	3NE3 635-6		1	3 units	016	1.184
With M12 female thread at both ends for direct busbar mounting, flange dimensions 73 mm													
	3	630	1000	aR	418 000	130	0.90	3NC3 336-6		1	3 units	016	1.160
		710			569 000	140	0.90	3NC3 337-6		1	3 units	016	1.160
		800			819 000	150	0.90	3NC3 338-6		1	3 units	016	1.160
		900			1 160 000	160	0.95	3NC3 340-6		1	3 units	016	1.160
		1000			1 670 000	165	0.95	3NC3 341-6		1	3 units	016	1.160
		1100	800		1 910 000	175	0.95	3NC3 342-6		1	3 units	016	1.160
		1250			2 600 000	185	0.95	3NC3 343-6		1	3 units	016	1.160
	3	315	1250	aR	72 500	80	0.95	3NC3 430-6		1	3 units	016	1.160
		400			163 000	95	0.95	3NC3 432-6		1	3 units	016	1.160
		500			290 000	115	0.90	3NC3 434-6		1	3 units	016	1.160
	630			650 000	120	0.95	3NC3 436-6		1	3 units	016	1.160	
	800	1100		985 000	145	0.95	3NC3 438-6		1	3 units	016	1.160	

Fuse Systems

SITOR Semiconductor Fuses

SITOR LV HRC design

Sizes	I_e	U_e	Operational classes	Breaking I^2t value	Power loss	Varying load factor	DT	Order No.	Price per PU	PU (UNIT, SET, M)	PS*/P. unit	PG	Weight per PU approx.	
A	V	AC		A ² s	W	WL							kg	
Fuses for special applications														
For screwing onto water-cooled busbars, for rectifiers in electrolysis systems														
	-- ¹⁾	350	800	aR	260 000	80	0.9	3NC5 531		1	3 units	016	0.671	
		600	1000		888 000	150	0.9	3NC5 840		1	3 units	016	1.485	
		630	800		888 000	145	0.9	3NC5 841		1	3 units	016	1.177	
		800	1000		1 728 000	170	0.9	3NC5 838		1	3 units	016	3.569	
		710	900		620 000	150	0.9	3NE6 437-7		1	3 units	016	1.062	
		1250	600		2 480 000	210	0.9	3NE9 450-7		1	3 units	016	1.072	
	With M10 female thread at both ends for direct busbar mounting, flange dimensions 89 (99) ²⁾ mm, for air-cooled rectifiers in electrolysis systems													
	-- ¹⁾	710	900	aR	620 000	150	0.9	3NE6 437		1	3 units	016	1.030	
		850	600	gR	2 480 000	85	1.0	3NE6 440-6		1	3 units	016	0.960	
		900	900	aR	1 920 000	170	0.9	3NE6 444		1	3 units	016	1.105	
	1250	600	aR	2 480 000	210	0.9	3NE9 450		1	3 units	016	1.011		
Fuses with installation holder for SITOR 6QG10 thyristor sets														
-- ¹⁾	200	1000	aR	44 000	50	0.85	3NE3 525-5		1	2 units	016	0.744		
	450			395 000	90	0.85	3NE3 535-5		1	2 units	016	0.735		
Fuses with installation holder for SITOR 6QG11 thyristor sets														
-- ¹⁾	50	1000	gR	1 100	20	0.85	3NE4 117-5		1	2 units	016	0.300		
	100		aR	7 400	35	0.85	3NE4 121-5		1	2 units	016	0.299		
	170		aR	60 500	43	0.85	3NE4 146-5		1	2 units	016	0.287		
Fuses for special applications														
With female thread at both ends for SITOR 6QG12 thyristor sets, flange dimensions 77 mm														
	-- ¹⁾	250	800	aR	29 700	105	0.85	3NE4 327-6B		1	3 units	016	0.780	
		315			60 700	120	0.85	3NE4 330-6B		1	3 units	016	0.770	
		450			191 000	140	0.85	3NE4 333-6B		1	3 units	016	0.780	
		500			276 000	155	0.85	3NE4 334-6B		1	3 units	016	0.770	
		710			923 000	155	0.95	3NE4 337-6		1	3 units	016	0.770	
	Special design for mounting directly in the railway supply rectifier													
-- ¹⁾	250	680	aR	635 000	25	0.9	3NC7 327-2		1	3 units	016	0.670		
	350			1 430 000	32	0.9	3NC7 331-2		1	3 units	016	0.740		

1) Special design

2) Flange dimensions 99 mm only for 3NE6 444.

Overview

SITOR cylindrical fuses protect power semiconductors from the effects of short-circuits because the quick-acting tripping characteristic is much quicker than that of conventional fuses. They protect high-quality devices and system components such as semiconductor contactors, electronic relays (solid state), converters with fuses in the input and in the DC link, UPS systems and soft starters for motors up to 100 A.

The cylindrical design is approved for industrial applications. The cylindrical fuse links comply with IEC 60269.

Cylindrical fuse holders also comply with IEC 60269 and UL 512. The cylindrical fuse holders for 10 x 38 mm and 14 x 51 mm have been tested and approved as fuse switch disconnectors and the cylindrical fuse holders for 22 x 58 mm as fuse disconnectors according to the switching device standard IEC 60947-3. The utilization category and the tested current and voltage values are specified in the Table "Technical Specifications".

The cylindrical fuse holders have been specially developed for the application of SITOR fuse links with regard to heat tolerance and heat dissipation and are therefore not recommended for standard applications.

Cylindrical fuse bases do not offer the same comprehensive touch protection as the fuse holders, but have better heat dissipation. The single-pole cylindrical fuse bases for 14 x 51 mm and 22 x 58 mm allow modular expansion to multi-pole bases.

Benefits

- Cylindrical fuses have an extremely compact design and a correspondingly small footprint
- The cylindrical fuses have IEC and UL approval and are suitable for universal use worldwide.
- The use of SITOR cylindrical fuses in the cylindrical fuse holders and bases has been tested with regard to heat dissipation and maximum current loading. This makes planning and dimensioning easier and prevents consequential damage.
- The use of fuse holders as switch disconnectors expands the area of application of these devices and increases operating safety

Technical specifications



		Cylindrical fuse holders		
		3NC1 0	3NC1 4	3NC2 2
Sizes	mm x mm	10 x 38	14 x 51	22 x 58
Standards		UL 512; CSA C22.2; IEC 60269-2, IEC 60947-3		
Approvals		UL 512; UL File No. E171267; CSA C22.2 No. 39-M		
Rated voltage U_n	V AC	690; 600 acc. to UL/CSA		
Rated current I_n	A AC	32 30 acc. to UL/CSA	50 50 acc. to UL 40 acc. to CSA	100 80 acc. to UL/CSA
Rated conditional short-circuit current	kA	50	50 (100 at 400 V)	50 (100 at 500 V)
Switching capacity • Utilization category		AC-22B (400 V)	AC-22B (400 V)	AC-20B (690 V)
Max. power dissipation of fuse links (conductor cross-section used)	W	3 (6 mm ²) 4.3 (10 mm ²)	5 (10 mm ²) 6.5 (25 mm ²)	9.5 (35 mm ²) 11 (50 mm ²)
Rated impulse withstand voltage	kV	6		
Overvoltage category		II		
Pollution degree		2		
No-voltage changing of fuse links		Yes		
Sealable when installed		Yes		
Mounting position		Any		
Current direction		Any		
Degree of protection acc. to IEC 60529		IP20		
Terminals are touch-protected according to BGVA3 at the incoming and outgoing feeder		Yes		
Ambient temperature	°C	45		
Conductor cross-sections • Finely stranded, with end sleeve • AWG (American Wire Gauge)	mm ²	1.5 ... 16 15 ... 5	1.5 ... 35 14 ... 2	4 ... 50 10 ... 1/0
Tightening torques	Nm lb.in	2.5 22	2.5 ... 3 22 ... 26	3.5 ... 4 31 ... 35

Fuse Systems

SITOR Semiconductor Fuses

SITOR, cylindrical fuse design

Selection and ordering data

Sizes	I_e	U_e	Breaking I^2t value	Power loss	DT	Order No.	Price per PU	PU (UNIT, SET, M)	PS*/ P. unit	PG	Weight per PU approx.	
mm × mm	A	V AC/ V DC	A ² s	W							kg	
Cylindrical fuse links, operational class aR¹⁾												
	10 × 38	3	600/700	8	1.2	▶ 3NC1 003		1	10 units	016	0.008	
		6		20	1.5	▶ 3NC1 006		1	10 units	016	0.008	
		8		30	2	▶ 3NC1 008		1	10 units	016	0.006	
		10		60	2.5	▶ 3NC1 010		1	10 units	016	0.007	
		12		110	3	▶ 3NC1 012		1	10 units	016	0.006	
		16		150	3.5	▶ 3NC1 016		1	10 units	016	0.009	
		20		200	4.8	▶ 3NC1 020		1	10 units	016	0.016	
		25		250	6	▶ 3NC1 025		1	10 units	016	0.008	
		32	600/--	500	7.5	▶ 3NC1 032		1	10 units	016	0.010	
	14 × 51	1	660/700	1.2	5		▶ 3NC1 401		1	10 units	016	0.018
		2			10	3	▶ 3NC1 402		1	10 units	016	0.020
		3			15	2.5	▶ 3NC1 403		1	10 units	016	0.018
4				25	3	▶ 3NC1 404		1	10 units	016	0.018	
5		690/700	9	1.5		▶ 3NC1 405		1	10 units	016	0.021	
6			12	1.5		▶ 3NC1 406		1	10 units	016	0.022	
10			20	4		▶ 3NC1 410		1	10 units	016	0.019	
15			75	5.5		▶ 3NC1 415		1	10 units	016	0.020	
20			120	6		▶ 3NC1 420		1	10 units	016	0.020	
25			250	7		▶ 3NC1 425		1	10 units	016	0.020	
30			300	9		▶ 3NC1 430		1	10 units	016	0.020	
32			700	7.6		▶ 3NC1 432		1	10 units	016	0.028	
40			900	8		▶ 3NC1 440		1	10 units	016	0.020	
50			1800	9		▶ 3NC1 450		1	10 units	016	0.021	
22 × 58	20	690/700	220	4.6		▶ 3NC2 220		1	5 units	016	0.056	
	25		300	5.6		▶ 3NC2 225		1	5 units	016	0.053	
	32		450	7		▶ 3NC2 232		1	5 units	016	0.055	
	40		700	8.5		▶ 3NC2 240		1	5 units	016	0.055	
	50		1350	9.5		▶ 3NC2 250		1	5 units	016	0.056	
	63		2600	11		▶ 3NC2 263		1	5 units	016	0.051	
	80		5500	13.5		▶ 3NC2 280		1	5 units	016	0.055	
	100	600/700	8000	16		▶ 3NC2 200		1	5 units	016	0.052	
	Cylindrical fuse links with striking pin, operational class aR¹⁾											
		14 × 51	10	690/700	90	4	▶ 3NC1 410-5		1	10 units	016	0.024
		15		100	5.5	▶ 3NC1 415-5		1	10 units	016	0.024	
		20		500	6	▶ 3NC1 420-5		1	10 units	016	0.020	
		25		400	7	▶ 3NC1 425-5		1	10 units	016	0.024	
		30		500	9	▶ 3NC1 430-5		1	10 units	016	0.020	
		32		600	7.6	▶ 3NC1 432-5		1	10 units	016	0.022	
		40		900	8	▶ 3NC1 440-5		1	10 units	016	0.020	
	50		2000	9	▶ 3NC1 450-5		1	10 units	016	0.020		
22 × 58	20	690/700	240	5		▶ 3NC2 220-5		1	10 units	016	0.039	
	25		350	6		▶ 3NC2 225-5		1	5 units	016	0.041	
	32		500	8		▶ 3NC2 232-5		1	5 units	016	0.057	
	40		800	9		▶ 3NC2 240-5		1	5 units	016	0.039	
	50		1500	9.5		▶ 3NC2 250-5		1	5 units	016	0.058	
	63		3000	11		▶ 3NC2 263-5		1	5 units	016	0.040	
	80		6000	13.5		▶ 3NC2 280-5		1	5 units	016	0.057	
22 × 58	100	600/700	8500	16		▶ 3NC2 200-5		1	5 units	016	0.042	

¹⁾ DC voltage acc. to UL.

SITOR, cylindrical fuse design

Sizes	Version	Rated voltage	DT	Order No.	Price per PU	PU (UNIT, SET, M)	PS*/P. unit	PG	Weight per PU approx.
mm × mm		V AC							kg
Cylindrical fuse holders Can be used as fuse switch disconnectors ¹⁾									
	10 × 38	1P	690	▶	3NC1 091	1	12 units	016	0.067
		2P		▶	3NC1 092	1	6 units	016	0.126
		3P		▶	3NC1 093	1	4 units	016	0.200
	14 × 51	1P		▶	3NC1 491	1	6 units	016	0.102
		2P		▶	3NC1 492	1	3 units	016	0.203
		3P		▶	3NC1 493	1	2 units	016	0.279
	22 × 58	1P		▶	3NC2 291	1	1 unit	016	0.204
		2P		▶	3NC2 292	1	3 units	016	0.358
		3P		▶	3NC2 293	1	2 units	016	0.512
Cylindrical fuse holders Can be used as fuse switch disconnectors, with signaling switches for fuse links with striking pin ¹⁾									
	14 × 51	1P	690		3NC1 491-5	1	6 units	016	0.130
	22 × 58	1P			3NC2 291-5	1	6 units	016	0.181
Cylindrical fuse bases									
	10 × 38	1P	600		3NC1 038-1	1	10 units	016	0.045
		2P			3NC1 038-2	1	8 units	016	0.074
		3P			3NC1 038-3	1	6 units	016	0.113
Fuse tongs									
	10 × 38, 14 × 51, 22 × 58				3NC1 000	1	1 unit	016	0.069

¹⁾ Please note the utilization category and current/voltage values, see "Technical specifications"

Fuse Systems

SITOR Semiconductor Fuses

NEOZED and DIAZED design, SILIZED

Overview

SILIZED is the brand name of the NEOZED fuses (D0 fuses) and the DIAZED fuses (D fuses) with quick-acting characteristic for semiconductor protection. The fuses are used in combination with fuse bases, fuse screw caps and accessory parts of the standard fuse system.

SILIZED fuses protect power semiconductors from the effects of short-circuits because the quick-acting tripping characteristic is much quicker than that of conventional fuses. They protect high-quality devices and system components, such as semiconductor contactors, static relays, converters with fuses in the input and in the DC link, UPS systems and soft starters for motors up to 100 A.

When using fuse bases and fuse screw caps made of molded plastic, always heed the maximum permissible power loss values due to the higher power loss (power dissipation) of the SILIZED fuses.

When using these components, the following maximum permissible power loss applies:

- NEOZED D02: 5.5 W
- DIAZED DII: 4.5 W
- DIAZED DIII: 7.0 W

This enables a partial thermal permanent load of only 50 %.

The DIAZED screw adapter DII for 25 A is used for the 30 A fuse link.




Benefits

- SILIZED fuses have an extremely compact design. This means they have a very small footprint – particularly the NEOZED version.
- The rugged and well-known DIAZED design complies with IEC 60269-3. It is globally renowned and can be used in many countries.
- A huge range of fuse bases and accessories are available for the NEOZED and DIAZED versions of the SILIZED fuses. This increases the application options in many areas

Technical specifications

		SILIZED fuse links, NEOZED design 5SE1 3	SILIZED fuse links, DIAZED design 5SD4
Standards		IEC 60269-3; IEC 60269-4, EN 60269-4	
Operational class		gR	
Characteristic		Quick-acting	
Rated voltage U_n	V AC	400	500
	V DC	250	500
Rated current I_n	A	10 ... 63	16 ... 100
Rated breaking capacity	kA AC	50	
	kA DC	8	
Mounting position		Any, but preferably vertical	
Non-interchangeability		Using adapter sleeves	Using screw adapter or adapter sleeves
Resistance to climate	°C	Up to 45 at 95 % rel. humidity	
Ambient temperature	°C	-5 ... +40, humidity 90 % at 20	

Selection and ordering data

Sizes	I_e	U_e	Breaking I^2t value	Power loss	DT	Order No.	Price per PU	PU (UNIT, SET, M)	PS*/ P. unit	PG	Weight per PU approx.			
	A	V AC/ V DC	A ² s	W							kg			
Fuse links, NEOZED design, SILIZED														
operational class gR														
	D01	10	400/250	73	6.9	5SE1 310		1	10 units	016	0.007			
		16		120	6.2				5SE1 316		1	10 units	016	0.007
	D02	20		190	8.1	5SE1 320		1	10 units	016	0.012			
		25		215	8.2				5SE1 325		1	10 units	016	0.013
		35		470	16.7				5SE1 335		1	10 units	016	0.013
		50		1960	12.0				5SE1 350		1	10 units	016	0.017
		63		4 230	15.5				5SE1 363		1	10 units	016	0.016
Fuse links, DIAZED design, SILIZED														
operational class gR														
	DII	16	500/500	60	12.1	5SD4 20		1	5 units	016	0.028			
		20		139	12.3				5SD4 30		1	5 units	016	0.029
		25		205	12.5				5SD4 40		1	5 units	016	0.029
		30		310	13.5				5SD4 80		1	5 units	016	0.031
	DIII	35	539	14.8	5SD4 50	1	5 units	016	0.047					
		50	1 250	18.5	5SD4 60	1	5 units	016	0.048					
		63	1 890	28	5SD4 70	1	5 units	016	0.049					
	DIV	80	4 200	34.3	5SD5 10	1	3 units	016	0.131					
		100	8 450	41.5	5SD5 20	1	3 units	016	0.115					

Fuse Systems

Photovoltaic Fuses

Introduction

Overview

Special demands are made on fuses for application in photovoltaic systems. These fuses have a high DC rated voltage and a tripping characteristic specially designed to protect PV modules and their connecting cables (the newly defined operational class gPV). It is also crucial that the PV fuses do not age in spite of strongly alternating load currents, in order to ensure high plant availability throughout the service life of the PV system. The fuses must also be able to withstand high temperature fluctuations without damage. These requirements were only incorporated into an international standard in recent years and have now been published as IEC 60269-6.

All Siemens photovoltaic fuse systems comply with this new standard. Furthermore, they also already comply with the recently agreed corrections to the characteristic curves, which will be incorporated in the next standard update.

The IEC cylindrical fuses used as string fuses also correspond to the characteristic curves specified in UL standard UL 2579. The non-fusing current I_{nf} and fusing current I_f test currents are crucial to the shape of the characteristic curves.

Standard	I_{nf}	I_f
Current IEC standard	$1.13 \times I_n$	$1.45 \times I_n$
UL standard	$1.0 \times I_n$	$1.35 \times I_n$
Future IEC standard	$1.05 \times I_n$	$1.35 \times I_n$
Siemens fuses	$1.13 \times I_n$	$1.35 \times I_n$

These test currents of gPV string fuses to 32 A apply for a conventional test duration of one hour; at I_{nf} , the fuse must not trip within an hour, at I_f , it must trip within an hour.

The PV cylindrical fuses of size 10 mm x 38 mm offer an especially space-saving solution for the protection of the strings.

The PV fuses in LV HRC design are usually used as cumulative fuses upstream of the inverter. In addition, they can also be used for protecting groups (PV subarrays). For the PV cumulative fuses of size 1, standard LV HRC fuse bases are available. For PV cumulative fuses of size 1L, 1XL, 2L, 2XL and 3L, we have developed a special 3NH7...-4 fuse base with a swiveling mechanism which combines maximum touch protection with maximum user-friendliness. This makes it possible to change fuses safely and without the need for any tools, such as a fuse handle. This provides safe and fast access even in an emergency.

The cylindrical fuse holders can be supplied in single-pole and two-pole versions with and without signal detectors. In the case of devices with signal detector, a small electronic device with LED is located behind an inspection window in the plug-in module. If the inserted fuse link is tripped, this is indicated by the LED flashing.

The fuse holders size 10 x 38 mm have a sliding catch that enables the removal of individual devices from the assembly. The infeed can be from the top or the bottom. As the cylindrical fuse holders are fitted with the same anti-slip terminals at the top and the bottom, the devices can also be bus-mounted at the top or the bottom.

Our cylindrical fuse holders and 3NH7 ...-4 fuse bases with swiveling mechanism comply with the IEC 60269-6 standard and are considered fuse disconnectors as defined in the switching device standard IEC 60947. Under no circumstances are they suitable for switching loads.

To ensure that PV fuses are correctly selected and dimensioned, the specific operating conditions and the PV module data must be taken into account when calculating voltage and current ratings.

Benefits

- Protection of the modules and their connecting cables in the event of reverse currents
- Safe tripping in case of fault currents reduces the risk of fire due to DC electric arcs
- Safe separation when the fuse holder/fuse base is open



PV cylindrical fuse system, 3NH7 0..-4, 3NH6 0..-4




PV fuse system NH, 3NH7 3..-4, 3NE1 3..-4D


Technical specifications

		Cylindrical fuse links 3NW6 0..-4	Cylindrical fuse holders 3NW7 0..-4
Sizes	mm x mm	10 x 38	
Standards		IEC 60269-6	IEC 60269, IEC 60269-6, IEC 60947, UL 4248-1, -18
Approvals		UL 248-13 (available soon)	UL 4248-1, -18, File No. E 355487
Operational class		gPV	
Rated voltage U_n	V DC	1000	
Rated current I_n	A DC	4 to 16	25
Rated short-circuit withstand current	kA	--	30
Rated breaking capacity	kA DC	30	--
Switching capacity • Utilization category		--	AC-20B, DC-20B (switching without load)
Max. power dissipation of the fuse link	W	--	3.4 (3.8 at 6 mm ²)
Rated impulse withstand voltage	kV	--	6
Overvoltage category		--	II
Pollution degree		--	2
No-voltage changing of fuse links		--	Yes
Sealable when installed		--	Yes
Mounting position		Any, but preferably vertical	
Current direction		--	Any (signal detector with antiparallel LED)
Degree of protection acc. to IEC 60529		--	IP20, with connected conductors
Terminals are touch-protected according to BGVA3 at the incoming and outgoing feeder		--	Yes
Ambient temperature	°C	-25 ... +55, humidity 90 % at +20	
Conductor cross-sections • Finely stranded, with end sleeve • AWG (American Wire Gauge)	mm ²	--	0.75 ... 25 18 ... 4
Tightening torques	Nm	--	2.5

Selection and ordering data

	Sizes	I_n	U_n	P_v	DT	Order No.	Price per PU	PU (UNIT, SET, M)	PS*/P. unit	PG	Weight per PU approx.
	mm x mm	A DC	V DC	W					Unit(s)		kg
	Cylindrical fuse links operational class gPV										
	10 x 38	4	1000	1.4		3NW6 004-4		1 20 units	016	0.010	
		6		2.0		3NW6 001-4		1 20 units	016	0.010	
		8		1.8		3NW6 008-4		1 20 units	016	0.010	
		10		2.5		3NW6 003-4		1 20 units	016	0.010	
		12		2.0		3NW6 006-4		1 20 units	016	0.009	
		16		2.7		3NW6 005-4		1 20 units	016	0.010	

3NW6 004-4

	Number of poles	I_n	For fuse links of size	Width	DT	Order No.	Price per PU	PU (UNIT, SET, M)	PS*/P. unit	PG	Weight per PU approx.
		A DC	mm x mm	MW					Unit(s)		kg
	Cylindrical fuse holders with signal detector										
	1P	25	10 x 38	1		3NW7 014-4		1 12 units	016	0.068	
	2P	25	10 x 38	2		3NW7 024-4		1 6 units	016	0.142	
	Cylindrical fuse holders without signal detector										
	1P	25	10 x 38	1		3NW7 013-4		1 12 units	016	0.063	
	2P	25	10 x 38	2		3NW7 023-4		1 6 units	016	0.132	

3NW7 014-4

Fuse Systems




Photovoltaic Fuses

PV cumulative fuses



Technical specifications

Sizes	Fuse links 3NE1 ...-4 / -4D / -5E					Fuse bases 3NH7 ...-4				
	1	1L	2L	1XL	2XL	1L	2L	1XL	2XL	
Standards	IEC 60269-6					IEC 60269 IEC 60269-6 IEC 60947				
Operational class	gPV									
Rated voltage U_n	V DC 1000 at time constant (L/R) 3 ms 1500 at time constant (L/R) 3 ms					1000		1500		
Rated current I_n	A DC	63 ... 160	200/250	315/400	63 ... 200	250/315	250	400	250	400
Rated short-circuit withstand current	kA	--								
Rated breaking capacity	kA DC	30								
Switching capacity • Utilization category		--					AC-20B, DC-20B (switching without load)			
Max. power dissipation of the fuse link	W	--					90	110	90	110
No-voltage changing of fuse links		--					Yes			
Sealable when installed		--					Yes			
Mounting position		Any, but preferably vertical								
Current direction		--					Any			
Ambient temperature	°C	-25 ... +55, humidity 90 % at +20								
Tightening torques	Nm	--					20			

Selection and ordering data

Sizes	I_n	U_n	P_v at U_n	DT	Order No.	Price per PU	PU (UNIT, SET, M)	PS*/P. unit	PG	Weight per PU approx.
Fuse links operational class gPV										
 3NE1 330-4D	1	63	1000	19	3NE1 218-4 3NE1 220-4 3NE1 221-4 3NE1 222-4 3NE1 224-4		1	2 units	016	0.580
		80		20						
		100		24						
		125		26						
		160		32						
		200		51						
	1L	250	54	3NE1 225-4D 3NE1 227-4D	1	2 units	016	0.796		
		315	73							
	2L	400	82	3NE1 330-4D 3NE1 332-4D	1	2 units	016	1.090		
1XL 	1	63	1500	20	3NE1 218-5E 3NE1 220-5E 3NE1 221-5E 3NE1 222-5E 3NE1 224-5E 3NE1 225-5E 3NE1 327-5E 3NE1 330-5E		1	2 units	016	2.200
		80		25						
		100		30						
		125		29						
	2XL 	160		34						
		200		41						
		250		53						
		315		63						

PV cumulative fuses

For fuse links of size	I_n	DT	Order No.	Price per PU	PU (UNIT, SET, M)	PS*/P. unit	PG	Weight per PU approx.
A DC								kg
Fuse bases with flat terminal								
Standard ceramic fuse base ¹⁾								
1	250	1000	▶ 3NH3 230		1	3 units	017	0.738
Fuse bases with swiveling mechanism								
1L	250	1000	3NH7 260-4		1	1 unit	016	1.300
2L	400	1000	3NH7 360-4		1	1 unit	016	1.750
1XL 	250	1500	3NH7 261-4		1	1 unit	016	1.200
2XL 	400	1500	3NH7 361-4		1	1 unit	016	1.600



3NH3 230



3NH7 360-4

¹⁾ For further information see [Catalog LV11](#).

