

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

Bulletin I2020 rev. A 07/94

# International IOR Rectifier

## 200HF(R) SERIES

### STANDARD RECOVERY DIODES

### Stud Version

#### Features

- High current carrying capability
- High surge current capability
- Types up to 1200V  $V_{RRM}$
- Stud cathode and stud anode version
- Standard JEDEC types
- Diffused junction


#### Typical Applications

- Battery chargers
- Converters
- Power supplies
- Machine tool controls

#### Major Ratings and Characteristics

Parameters	200HF(R)	Units
$I_{F(AV)}$	200	A
	@ $T_C$	125 °C
$I_{F(RMS)}$	314	A
$I_{FSM}$	@ 50Hz	4400 A
	@ 60Hz	4610 A
$I^2t$	@ 50Hz	97 KA <sup>2</sup> s
	@ 60Hz	88 KA <sup>2</sup> s
$V_{RRM}$ range	400 to 1200	V
$T_J$	-40 to 180	°C

200 A

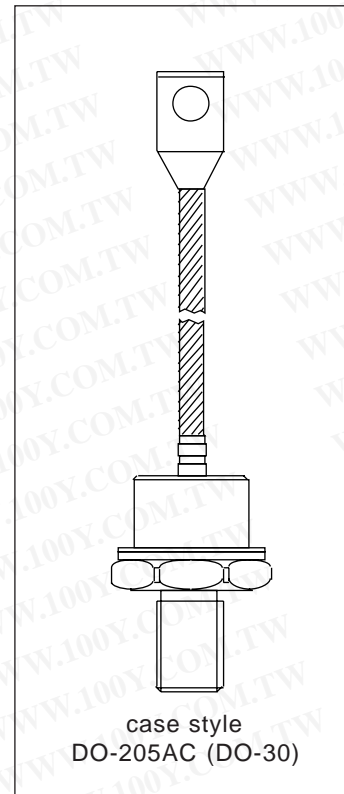

**勝特力材料 886-3-5753170**  
**勝特力电子(上海) 86-21-54151736**  
**勝特力电子(深圳) 86-755-83298787**  
[Http://www.100y.com.tw](http://www.100y.com.tw)

## 200HF(R) Series

Bulletin I2020 rev. A 07/94

International  
 Rectifier

### ELECTRICAL SPECIFICATIONS

#### Voltage Ratings

Type number	Voltage Code	$V_{RRM}$ , maximum repetitive peak reverse voltage V	$V_{RSM}$ , maximum non-repetitive peak rev. voltage V	$I_{RRM}$ max. @ 180°C mA
200HF(R)	40	400	500	15
	80	800	900	
	120	1200	1300	

#### Forward Conduction

Parameter	200HF(R)	Units	Conditions
$I_{F(AV)}$ Max. average forward current @ Case temperature	200	A	180° conduction, half sine wave
	125	°C	
$I_{F(RMS)}$ Max. RMS forward current	314	A	DC @ 120°C case temperature
$I_{FSM}$ Max. peak, one-cycle forward, non-repetitive surge current	4400	A	t = 10ms No voltage
	4610		t = 8.3ms reapplied
	3700		t = 10ms 100% $V_{RRM}$
	3870		t = 8.3ms reapplied
$I^2t$ Maximum $I^2t$ for fusing	97	KA <sup>2</sup> s	t = 10ms No voltage
	88		t = 8.3ms reapplied
	68		t = 10ms 100% $V_{RRM}$
	62		t = 8.3ms reapplied
$I^2\sqrt{t}$ Maximum $I^2\sqrt{t}$ for fusing	968	KA <sup>2</sup> √s	t = 0.1 to 10ms, no voltage reapplied
$V_{F(TO)1}$ Low level value of threshold voltage	0.85	V	$(16.7\% \times \pi \times I_{F(AV)} < I < \pi \times I_{F(AV)}), T_J = T_J \text{ max.}$
$V_{F(TO)2}$ High level value of threshold voltage	1.04		$(I > \pi \times I_{F(AV)}), T_J = T_J \text{ max.}$
$r_{F1}$ Low level value of forward slope resistance	0.85	mΩ	$(16.7\% \times \pi \times I_{F(AV)} < I < \pi \times I_{F(AV)}), T_J = T_J \text{ max.}$
$r_{F2}$ High level value of forward slope resistance	0.59		$(I > \pi \times I_{F(AV)}), T_J = T_J \text{ max.}$
$V_{FM}$ Max. forward voltage drop	1.45	V	$I_{pk} = 6.28A, T_J = 25^\circ C$

**Thermal and Mechanical Specification**

Parameter	200HF(R)	Units	Conditions
T <sub>J</sub> Max. operating temperature range	-40 to 180	°C	
T <sub>stg</sub> Max. storage temperature range	-55 to 180		
R <sub>thJC</sub> Max. thermal resistance, junction to case	0.17	K/W	DC operation
R <sub>thCS</sub> Max. thermal resistance, case to heatsink	0.08		Mounting surface, smooth, flat and greased
T Max. allowed mounting torque +0 -20%	11	Nm	Not lubricated threads
	10		Lubricated threads
wt Approximate weight	120	g	
Case style	DO-205AC(DO-30)		See Outline Table

**ΔR<sub>thJC</sub> Conduction**

(The following table shows the increment of thermal resistance R<sub>thJC</sub> when devices operate at different conduction angles than DC)

Conduction angle	Sinusoidal conduction	Rectangular conduction	Units	Conditions
180°	0.045	0.037	K/W	T <sub>J</sub> = T <sub>J</sub> max.
120°	0.056	0.061		
90°	0.073	0.079		
60°	0.102	0.105		
30°	0.154	0.156		

**Ordering Information Table**

Device Code	
<div style="display: flex; justify-content: space-around; align-items: center;"> <div style="border: 1px solid black; padding: 2px 5px; margin: 2px;">200</div> <div style="border: 1px solid black; padding: 2px 5px; margin: 2px;">HF</div> <div style="border: 1px solid black; padding: 2px 5px; margin: 2px;">R</div> <div style="border: 1px solid black; padding: 2px 5px; margin: 2px;">120</div> <div style="border: 1px solid black; padding: 2px 5px; margin: 2px;">P</div> <div style="border: 1px solid black; padding: 2px 5px; margin: 2px;">B</div> <div style="border: 1px solid black; padding: 2px 5px; margin: 2px;">V</div> </div> <div style="display: flex; justify-content: space-around; margin-top: 5px;"> <span>①</span> <span>②</span> <span>③</span> <span>④</span> <span>⑤</span> <span>⑥</span> <span>⑦</span> </div>	<p><b>1</b> - Essential Part Number</p> <p><b>2</b> - Diode</p> <p><b>3</b> - None = Stud Normal Polarity (Cathode to Stud)  R = Stud Reverse Polarity (Anode to Stud)</p> <p><b>4</b> - Voltage code: Code x 10 = V<sub>RRM</sub> (See Voltage Ratings table)</p> <p><b>5</b> - P = Stud base DO-205AC(DO-30) 1/2" 20UNF-2A  M = Stud base DO-205AC(DO-30) M12x1.75</p> <p><b>6</b> - B = Flag top terminals (for Cathode/ Anode Leads)  S = Isolated lead with silicone sleeve  (Red = Reverse Polarity; Blue = Normal Polarity)  None = Not isolated lead</p> <p><b>7</b> - V = Glass-metal seal</p>


勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

**200HF(R) Series**

Bulletin I2020 rev. A 07/94

International  
**IRF** Rectifier

Outline Table

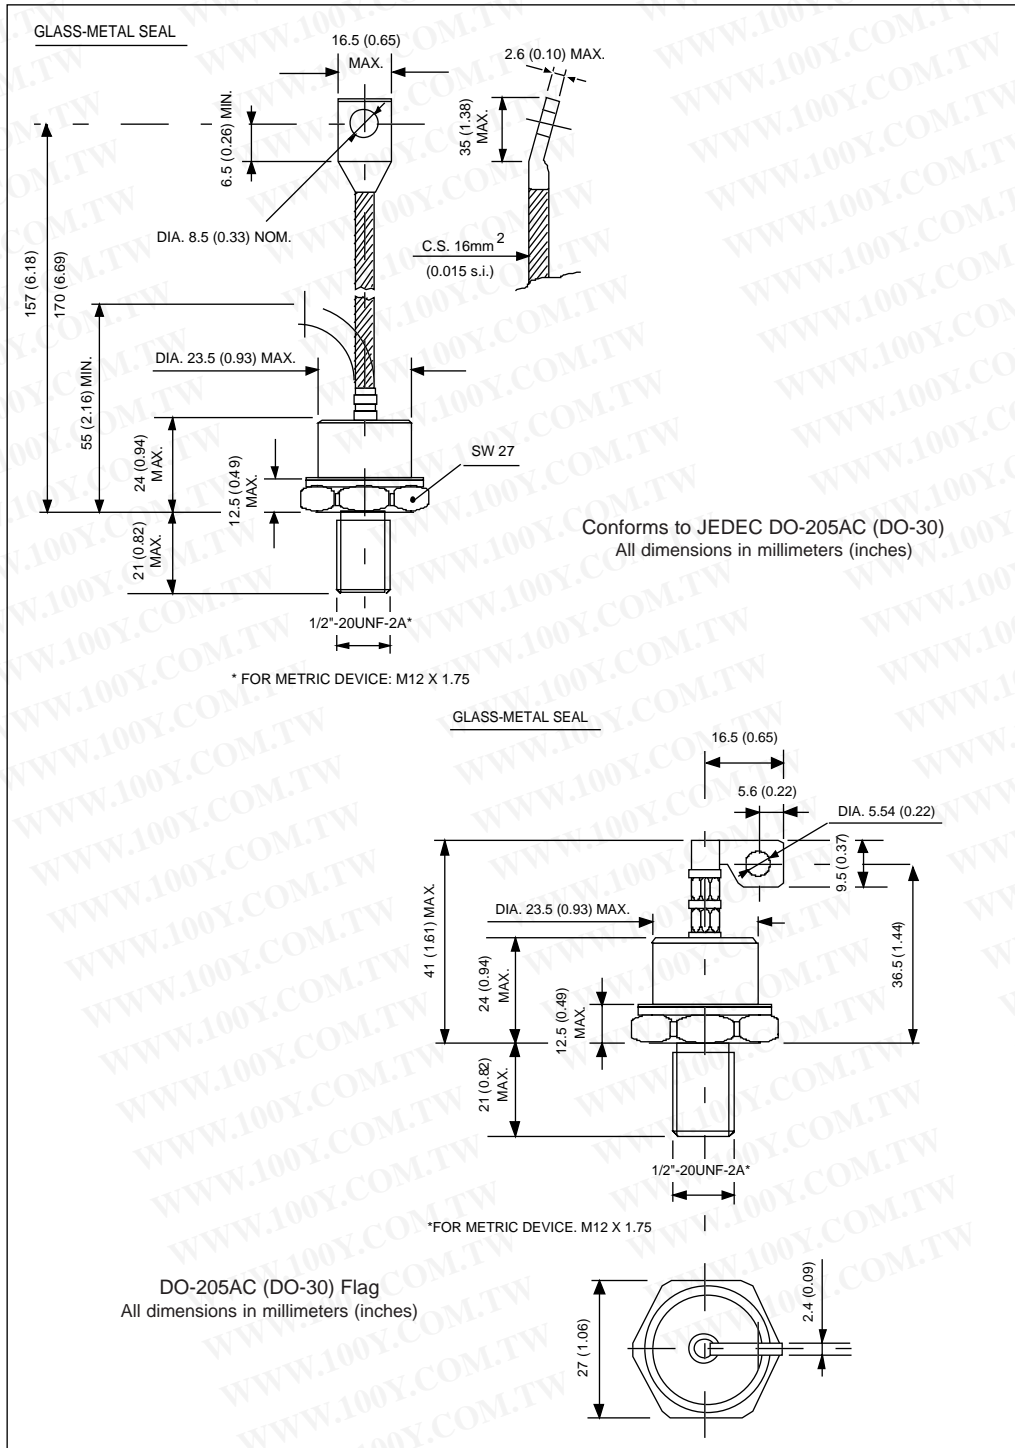



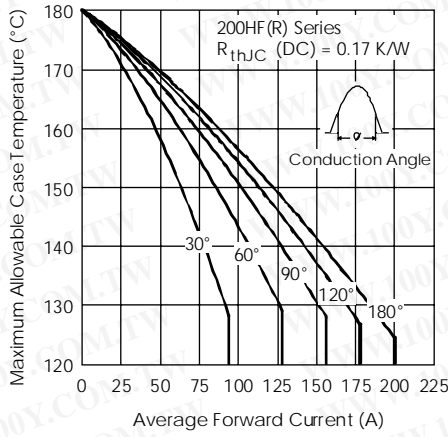


Fig. 1 - Current Ratings Characteristics

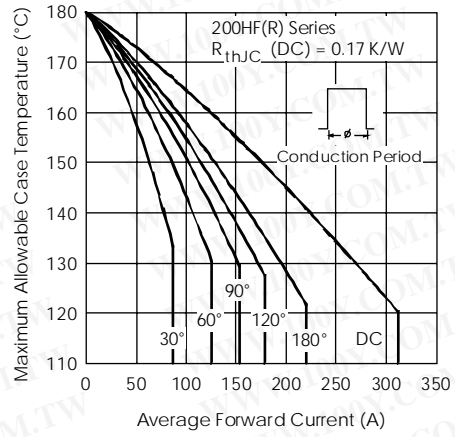


Fig. 2 - Current Ratings Characteristics

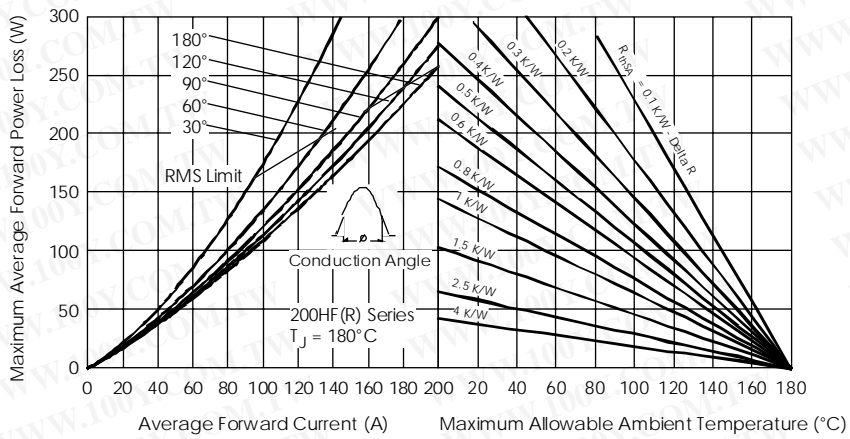


Fig. 3 - Forward Power Loss Characteristics

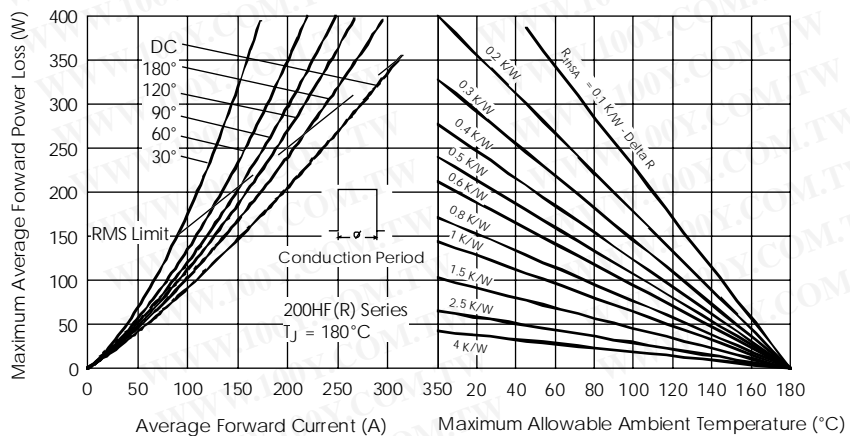


Fig. 4 - Forward Power Loss Characteristics

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

## 200HF(R) Series

Bulletin I2020 rev. A 07/94

International  
IR Rectifier

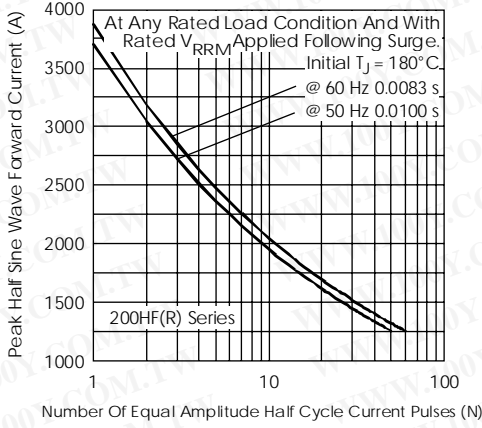


Fig. 5 - Maximum Non-Repetitive Surge Current

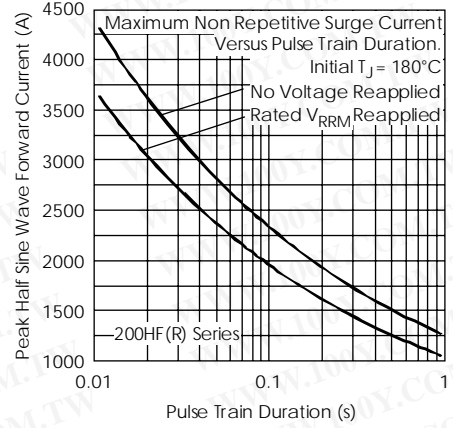


Fig. 6 - Maximum Non-Repetitive Surge Current

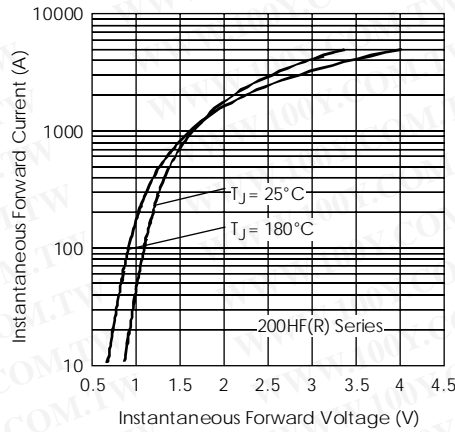


Fig. 7 - Forward Voltage Drop Characteristics

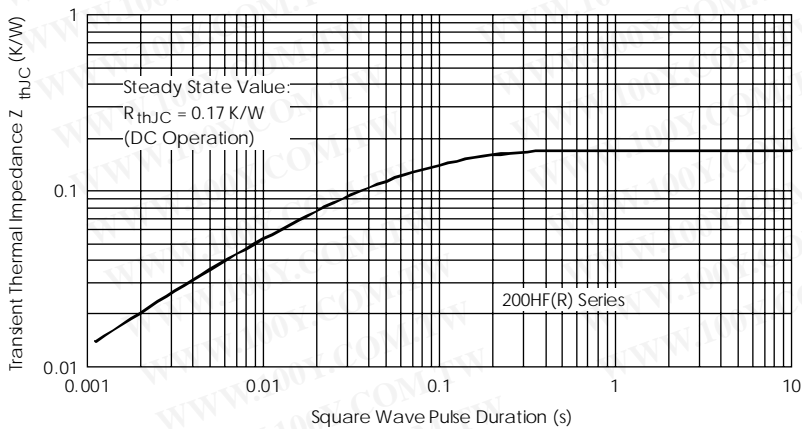


Fig. 8 - Thermal Impedance  $Z_{thJC}$  Characteristics