

Compact Fluorescent Lamps

Bulb Identification	5-2
Lamp Locator	5-2
Base Identification	5-4
Introduction	5-4
Product Information	5-5
Section Headings	5-6
Plug-in Lamps	
2-Pin Low Wattage Biax®	5-7
4-Pin High Lumen Biax®	5-7
2-Pin Double Biax®	5-8
4-Pin Double Biax®	5-8
4-Pin Triple Biax®	5-8
4-Pin High Output Biax®	5-9
4-Pin 2D®	5-9
Self-Ballasted Lamps	
Spiral®	5-10
Biax®	5-11
Reflectors	5-11
Genura®	5-12
Decorative Shapes	5-12
Lamps and Adapters	
Circlite®	5-13
Specialty	
covRguard® Spiral®	5-13
Blacklight	5-13
Blacklight Blue	5-13
Germicidal	5-13
Film and TV Lighting HLBX 4-Pin	5-15
Footnotes	5-15
Caution Notices	5-16
Cross-Reference	5-18
GE Enhanced Plug-in Product Comparison	5-19

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Incandescent

Halogen

High Intensity
Discharge

Fluorescent

Compact
Fluorescent

Ballast

LED Lamps
and Systems

Stage and Studio

Miniature and
Sealed Beam

Projection

Compact Fluorescent Lamps

Bulb Identification




NOMINAL LENGTH:
Overall length including base or pins.

Note: Lamp drawings are not drawn to scale. Be sure to check size and dimension information when identifying each lamp.

To convert inches to millimeters, multiply the dimension (in inches) by 25.4 (i.e. $1.5" \times 25.4 = 38.1 \text{ mm}$).

勝特力材料 886-3-5753170
勝特力電子(上海) 86-21-34970699
勝特力電子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)


Lamp Locator

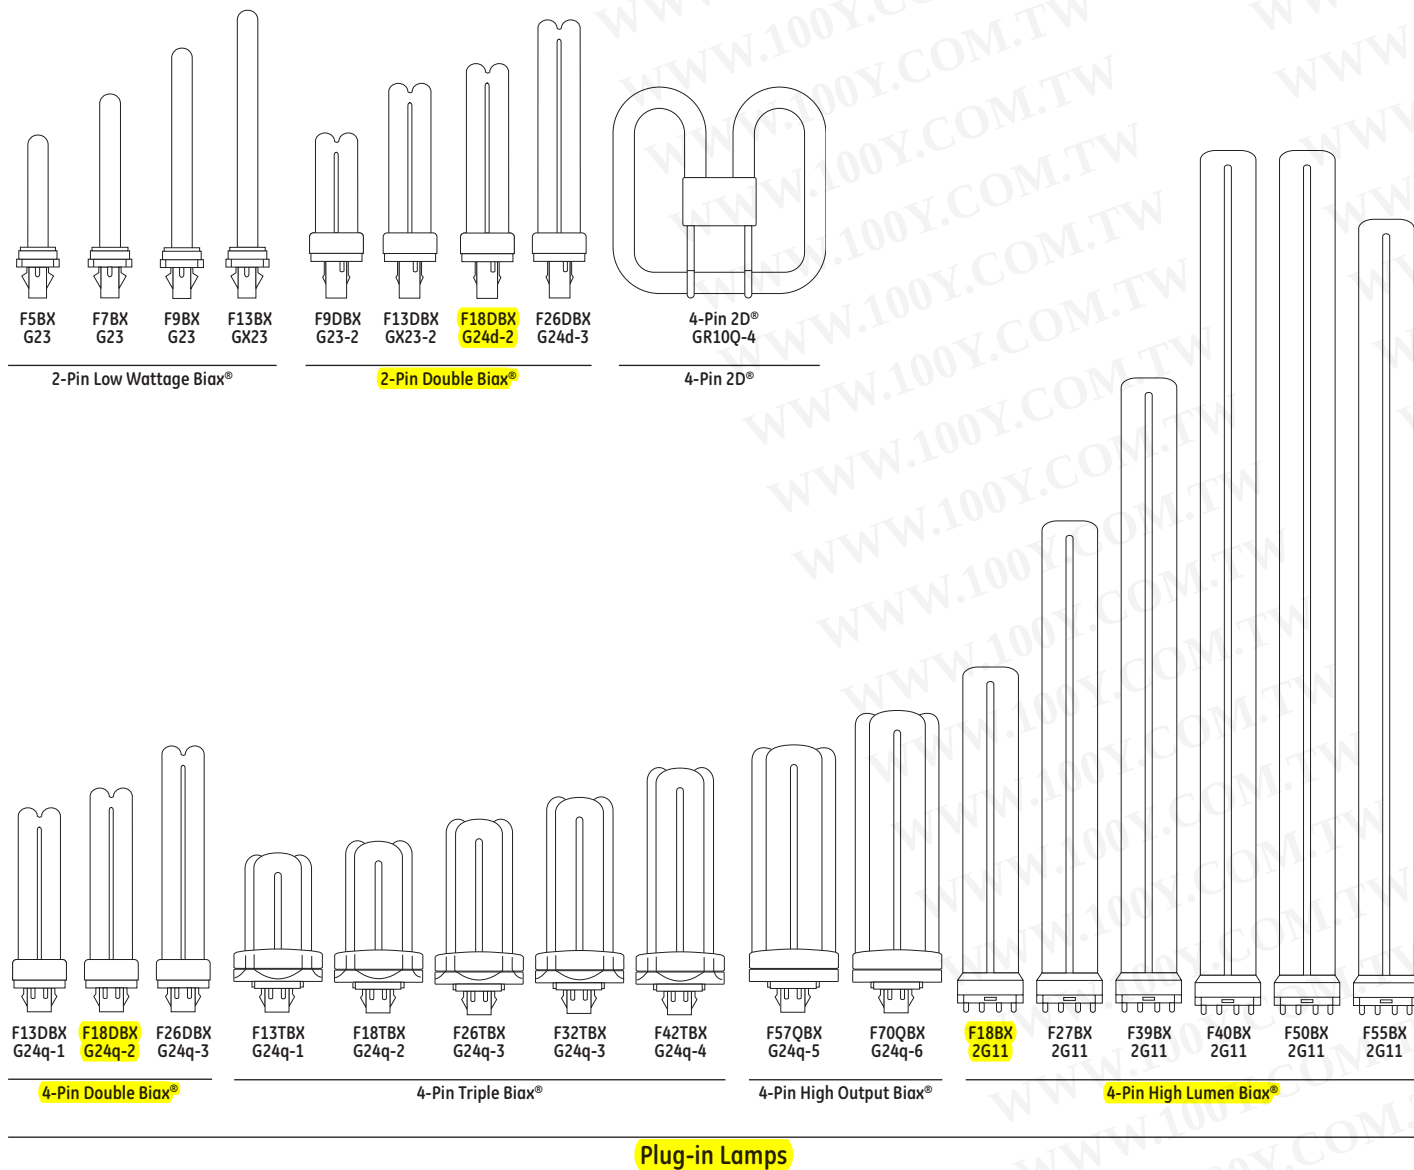

Plug-in Lamps

For the most up-to-date product information, see www.gelighting.com.

Lamp Locator (continued)

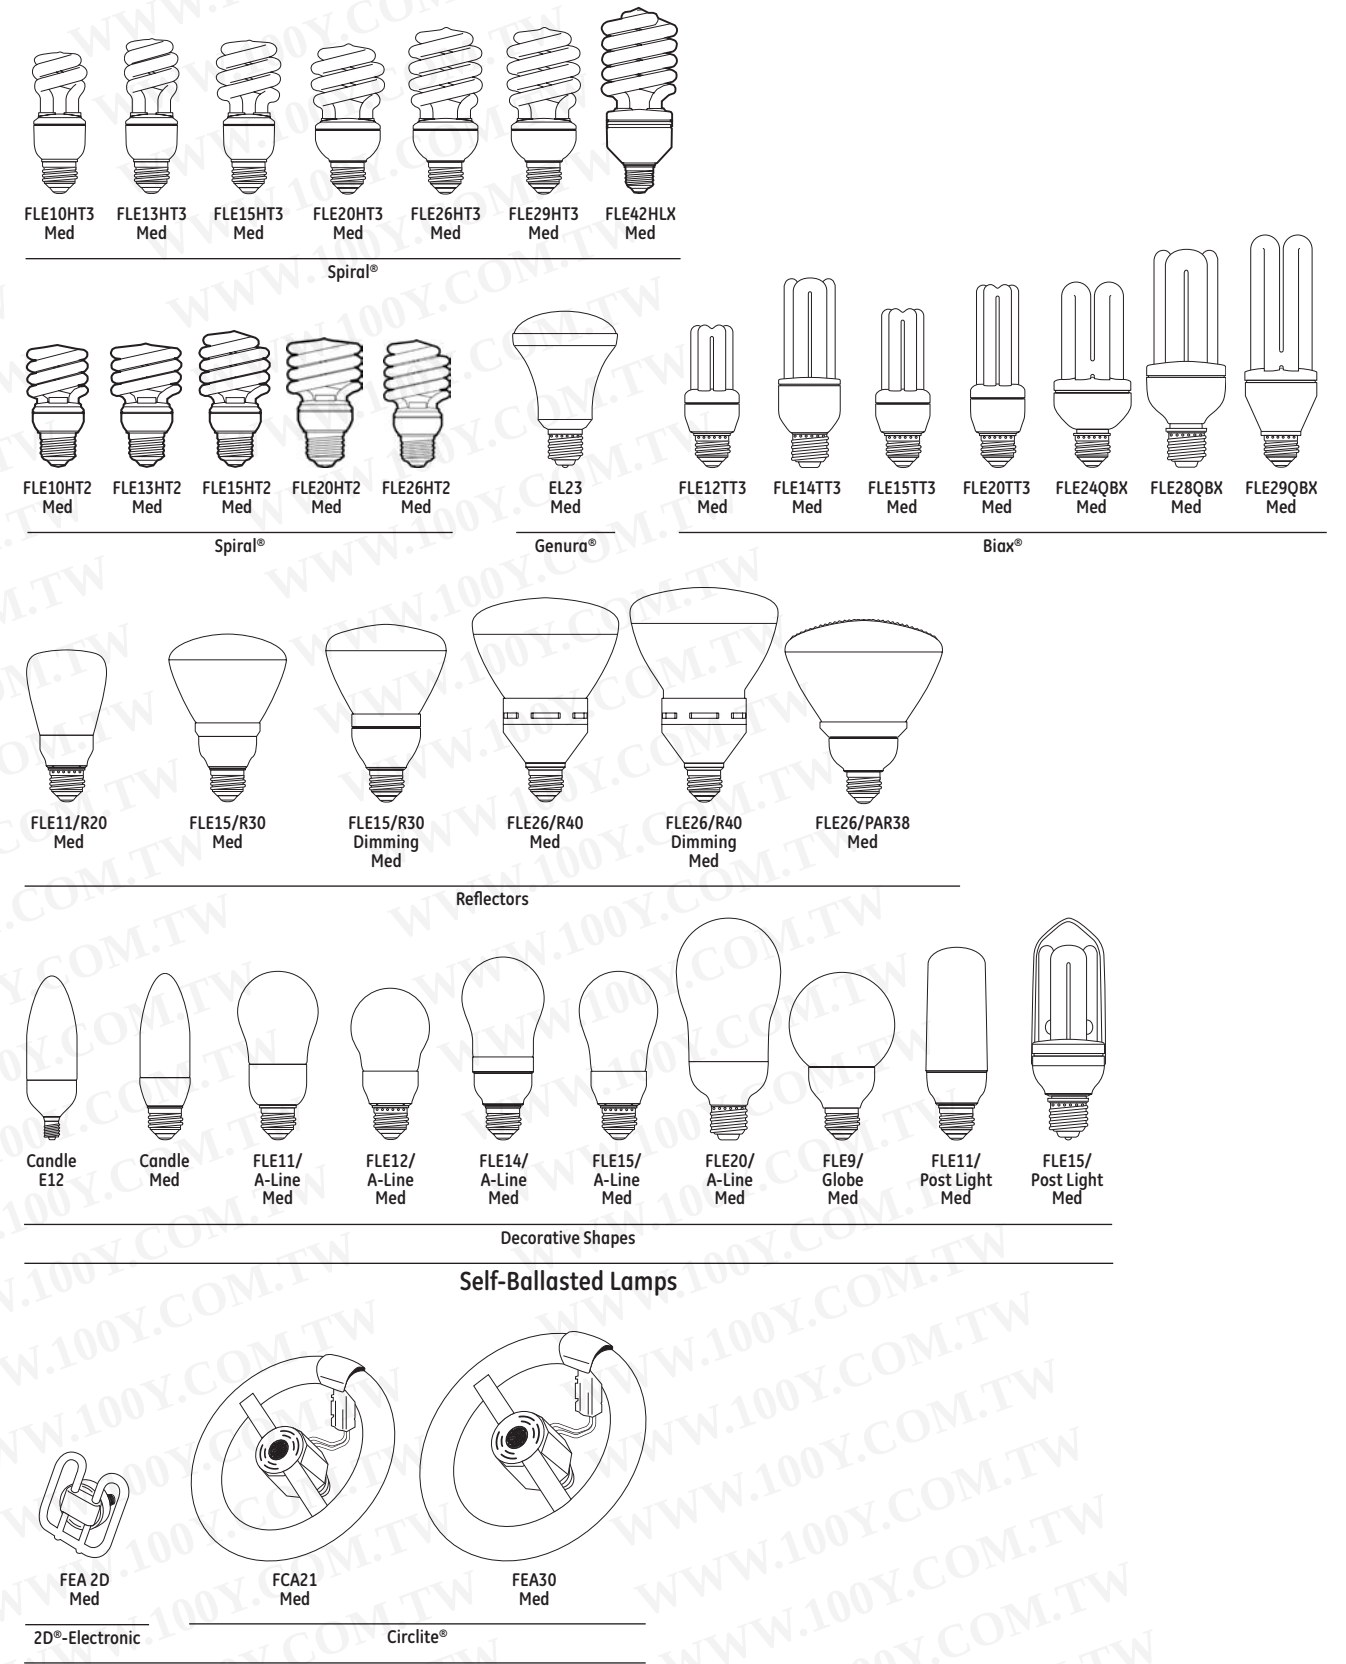


Lamps and Adapters

For the most up-to-date product information, see www.gelighting.com.

Compact Fluorescent Lamps

Base Identification

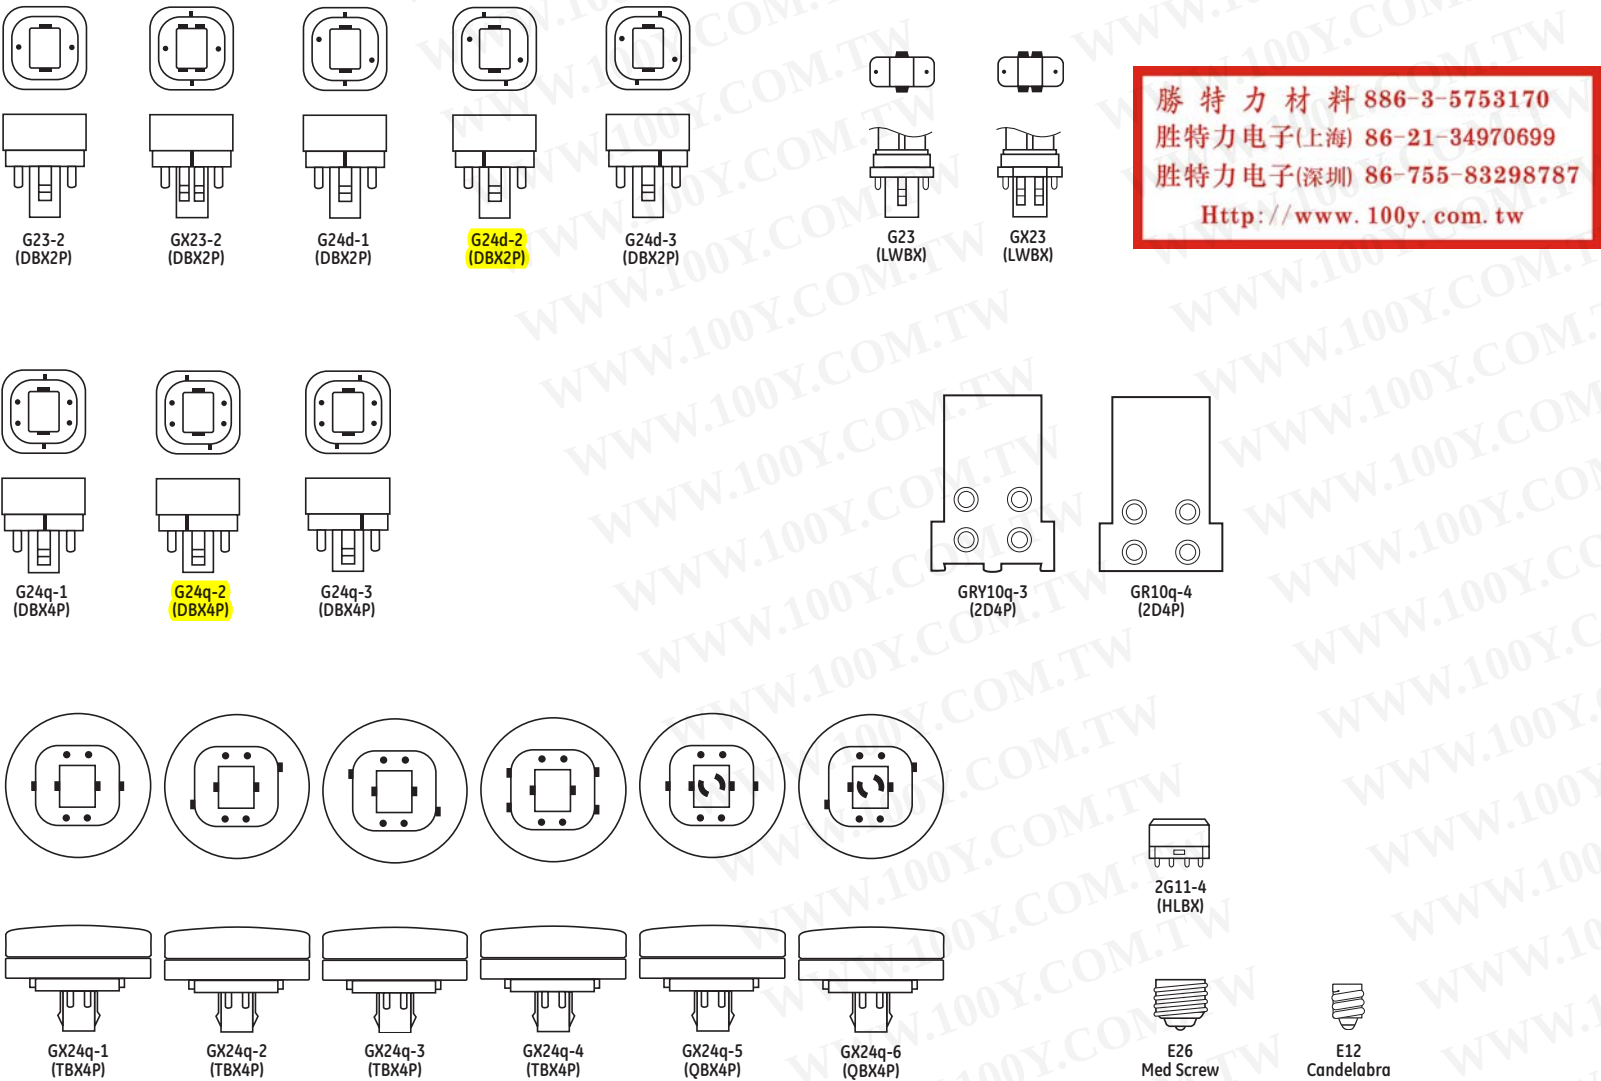

Introduction

- GE Compact Fluorescent lamps offer many advantages:
- Dramatic energy cost savings...up to 77% vs. incandescent lamps of comparable light output
 - Extra long life...most last 8 to 10 times longer, and some last up to 20 times longer, than standard incandescent lamps
 - High light output comparable to, and in some cases exceeding, incandescent lamps replaced
 - Excellent color rendering...rare earth tri-phosphor provides such high-quality color you won't believe it's fluorescent. Most types offer a choice of color options, from warm to cool, to let you select the tone and atmosphere you need.
 - A choice of wattages, shapes and sizes to meet your lighting needs. Designed to fit everything from table lamps to wall sconces and ceiling fixtures.
 - Many lamps use amalgam technology which provides stable lumen performance when operated in any position, over a wider range of ambient temperatures.

Compact Fluorescent Brand Name Cross-Reference

GE	OSRAM/SYLVANIA	PHILIPS
2D®	—	—
Biax®	Dulux® S	PL-S
High Lumen Biax®	Dulux® L	PL-L
Double Biax®	Dulux® D, D/E	PL-C
Triple Biax®	Dulux® T/E	PL-T
Quad Biax®	—	—
High Output Biax®	—	PL-H
Spiral®	Dulux® EL Twist	EL Twist
Genura®	Dura-One	—

ATTENTION: This brand-name cross-reference chart is provided only as a quick reference. Other lamp company brand listings may only represent a near equivalent, versus an identical match to GE Lighting brands. Individual lamp manufacturers' performance specifications should be consulted. Lamp performance may be affected by environmental conditions, ballast type and/or other auxiliary equipment.

Product Information

Plug-in Lamps

2-Pin Low Wattage Biax® (pg 5-7)

- Compact size offers fixture and design flexibility
- GX23 and G23 bases are preheat lamps with internal starters
- 13-watt version also available with internal electronic starter, providing flicker-free instant on
- Available in warm and cool color temperatures
- TCLP Compliant

4-Pin High Lumen Biax® (pg 5-7)

- Available in a range of sizes and wattages for innovative compact luminaires
- High efficiency and outstanding performance in fixtures make them ideal for 2X2, 1X1 and indirect fixtures
- Available in warm to cool color temperatures; excellent color rendering

2-Pin Double Biax® (pg 5-8)

- More compact than low-wattage Biax® CFLs with higher lumen output—suitable for a broad range of applications
- Preheat lamps with starters; not suitable for use with dimming ballasts
- 26-watt version also available with internal electronic starter, providing flicker-free instant on
- Available in warm to cool color temperatures
- TCLP Compliant

4-Pin Double Biax® (pg 5-8)

- More compact than low-wattage Biax® CFLs with higher lumen output—suitable for a broad range of applications
- Dimmable and compatible with electronic ballasts
- Available in warm to cool color temperatures
- TCLP Compliant

4-Pin Triple Biax® (pg 5-8)

- GE's shortest, most compact Biax® lamp. 17-31% shorter than similar wattage Double Biax® lamps.
- 4-Pin, dimmable and compatible with electronic ballasts
- Available in a wide range of wattages: from 13 to 42 watts
- Available in warm to cool color temperatures
- TCLP Compliant

4-Pin High Output Biax® (pg 5-9)

- GE's highest light output compact fluorescent lamps
- High efficacy 72-75 LPW
- Dimmable, available in 5 colors (2,700 to 5,000K)
- Suitable for high-bay lighting
- TCLP Compliant

4-Pin 2D® (pg 5-9)

- Unique shape suitable for broad range of applications
- Uniform light distribution
- High light output – up to 200W incandescent equivalent

Self-Ballasted Lamps

Spiral® (pg 5-10)

- Long life – up to 12,000 hours
- One-piece unit screws directly into incandescent sockets
- Wide variety of wattages to meet application needs
- T2 & T3 Spiral® CFLs provide economical solution with small overall size
- The 42-watt T4 Spiral® CFL provides a 150W incandescent replacement in the smallest possible size (fits an 8.5" harp)

Biax® (pg 5-11)

- Super long life – from 10,000 to 15,000 hour rating
- One-piece unit screws directly into incandescent sockets
- Wide variety of wattages to meet application needs
- T3 Mini Biax® CFL provides longest life with smallest overall size
- Selected lamps offer 3-way or dimming functionality

Reflectors (pg 5-11)

- R20, R30, R40 and PAR38 glass reflectors available to meet application needs
- Medium based; fits most incandescent reflector applications
- R30 and R40 lamps available with dimming functionality

Genura® (pg 5-12)

- Extremely long life – rated life of 15,000 hours
- One-piece unit screws directly into incandescent sockets
- Provides more light than 75W incandescent reflector lamps
- Electrodeless design

Decorative Shapes (pg 5-12)

- Variety of shapes (A-Line, Bullet, Candle, Globe, and Post) and wattages to meet all needs
- One-piece unit screws directly into incandescent sockets
- Candle-shaped CFLs available in both medium base and candelabra base

Lamps and Adapters

Circlite® (pg 5-13)


- Lamp and adapter are separate. Replaceable lamps plug into adapters that screw into standard incandescent sockets.
- Lamps rated for 10,000 hours; adapters rated for 40,000 hours (4 lamp lives)

Compact Fluorescent Lamps

勝 特 力 材 料 886-3-5753170
胜特力电子(上海) 86-21-34970699
胜特力电子(深圳) 86-755-83298787
Http://www.100y.com.tw

Headings in this catalog section

The following terms and descriptions can help you when checking Compact Fluorescent lamp specifications and when ordering

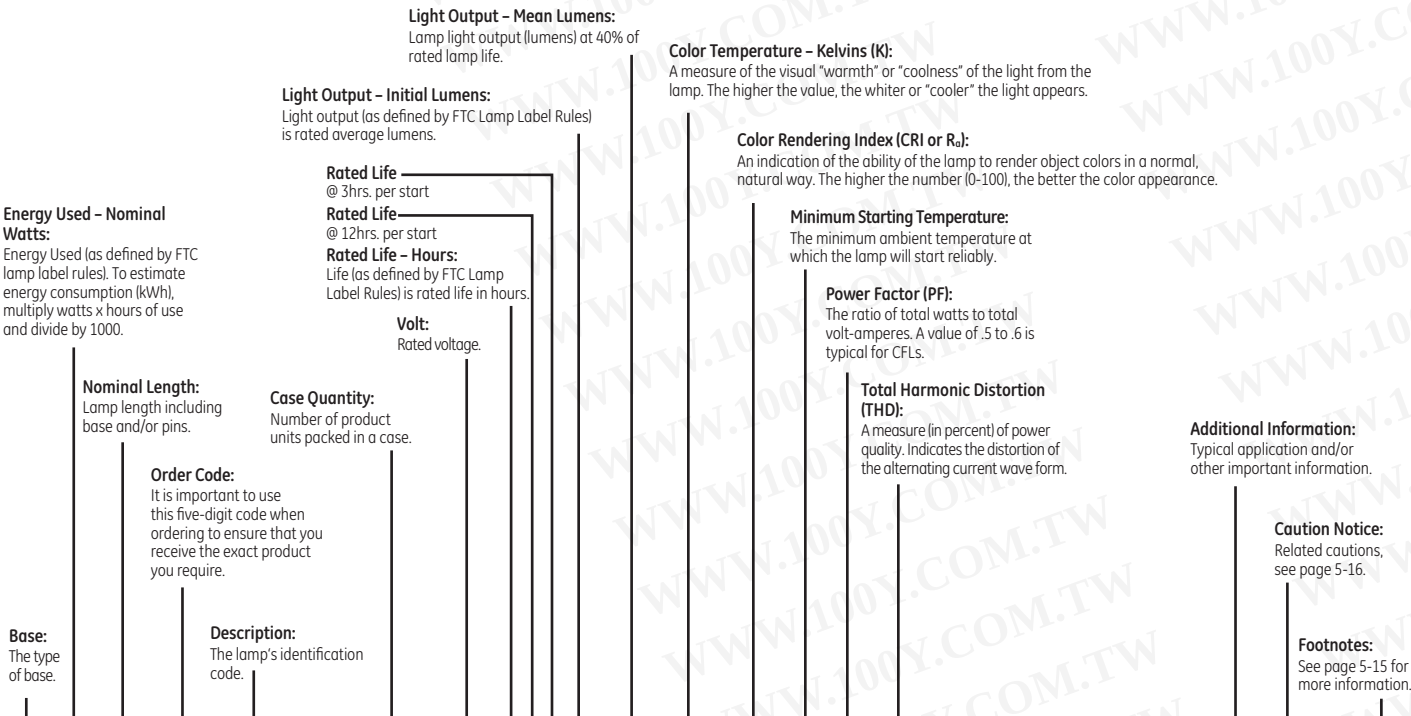

Base	Watts	Nominal Length (in)	Order Code	Description	Case Qty	Volts	Rated Life (hrs)	Initial Lumens	Mean Lumens	Color Temp K	CRI	Min. Start. Temp (°F)	Power Fact.	THD	TCLP Compliant Plug-Ins	EOL Protection Plug-Ins	ENERGY STAR® Screw-Ins	Additional Information	Caution Notice	Footnotes
------	-------	---------------------	------------	-------------	----------	-------	------------------	----------------	-------------	--------------	-----	-----------------------	-------------	-----	-------------------------	-------------------------	------------------------	------------------------	----------------	-----------

Self-Ballasted Lamps

Spiral®																				
Med	10	4.4	15829	FL E10HT3/2/827	10	120	8000	520	420	2700	82	5	0.6	120			★	T3 Spiral®, Baxed	153	1,7,8,9,10



FL E 10 HT3 / 2 / 827

- Identifies as Fluorescent Lamp
- Identifies wattage
- Identifies additional information
- Identifies lamp shape
- Identifies lamp's finish or color
- Electronically ballasted

WHEN YOU DON'T KNOW THE LAMP DESCRIPTION

- Identify bulb shape next to lamp information.
- Measure bulb diameter using ruler in appendix section page A-1 to determine width in eighths of an inch.
- Identify base type using table on page 5-4.
- Find your lamp in the table containing the bulb shape, size and base.

勝 特 力 材 料 886-3-5753170
胜特力电子(上海) 86-21-34970699
胜特力电子(深圳) 86-755-83298787
Http://www.100y.com.tw

Base	Watts	Nom. Length (in)	Order Code	Description	Case Qty	Rated Life (hrs)	Initial Lumens	Mean Lumens	Color Temp K	CRI	Min Starting Temp (°F)	TCLP Compliant Plug-Ins	EOL Protection Plug-Ins	Additional Information	Caution Notice	Footnotes
------	-------	------------------	------------	-------------	----------	------------------	----------------	-------------	--------------	-----	------------------------	-------------------------	-------------------------	------------------------	----------------	-----------

Plug-in Lamps

2-Pin Low Wattage Biax®																
	5	4.2	97551	F5BX/827/ECO	100	10000	265	220	2700	82		★			151	1,2
	5	4.2	97552	F5BX/827/CDECO	6	10000	265	220	2700	82		★		Carded	151	1,2
	5	4.2	97553	F5BX/841/ECO	100	10000	265	220	4100	82		★			151	1,2
	7	5.3	97554	F7BX/827/ECO	100	10000	425	350	2700	82		★			151	1,2
	7	5.3	97555	F7BX/827/CDECO	6	10000	425	350	2700	82		★		Carded	151	1,2
	7	5.3	97556	F7BX/835/ECO	100	10000	425	350	3500	82		★			151	1,2
	7	5.3	97557	F7BX/841/ECO	100	10000	425	350	4100	82		★			151	1,2
	9	6.6	97558	F9BX/827/ECO	100	10000	600	500	2700	82		★			151	1,2
	9	6.6	97559	F9BX/827/CDECO	6	10000	600	500	2700	82		★		Carded	151	1,2
	9	6.6	97560	F9BX/835/ECO	100	10000	600	500	3500	82		★			151	1,2
	9	6.6	97561	F9BX/841/ECO	100	10000	600	500	4100	82		★			151	1,2
	13	7.0	97573	F13BX/827/ECO	100	10000	825	710	2700	82		★			151	1,2
	13	7.0	97567	F13BX/827/CDECO	6	10000	825	710	2700	82		★		Carded	151	1,2
	13	7.0	97574	F13BX/830/ECO	100	10000	825	710	3000	82		★			151	1,2
	13	7.0	97569	F13BX/835/ECO	100	10000	825	710	3500	82		★			151	1,2
	13	7.0	97568	F13BX/835ECO100P	100	10000	825	710	3500	82		★		Bulk Pack	151	1,2
	13	7.0	97571	F13BX/841/ECO	100	10000	825	710	4100	82		★			151	1,2
	13	7.0	97570	F13BX/841ECO100P	100	10000	825	710	4100	82		★		Bulk Pack	151	1,2
	13	7.0	97572	F13BX/850/ECO	100	10000	784	675	5000	80		★			151	1,2
	13	7.0	97562	F13BX/E/827/ECO	100	10000	825	710	2700	82		★		Internal Electronic Starter	151	1,2
	13	7.0	97563	F13BX/E/830/ECO	100	10000	825	710	3000	82		★		Internal Electronic Starter	151	1,2
	13	7.0	97564	F13BX/E/835/ECO	100	10000	825	710	3500	82		★		Internal Electronic Starter	151	1,2
	13	7.0	97565	F13BX/E/841/ECO	100	10000	825	710	4100	82		★		Internal Electronic Starter	151	1,2
	13	7.0	97566	F13BX/E/850/ECO	100	10000	785	675	5000	82		★		Internal Electronic Starter	151	1,2

4-Pin High Lumen Biax®																
	18	9.0	16649	F18BX/SPX30 10PK	40	10000	1200	1080	3000	82	25				151	1,2,4,6
	18	9.0	16053	F18BX/SPX35 10PK	40	10000	1200	1080	3500	82	25				151	1,2,4,6
	18	9.0	16940	F18BX/SPX41 10PK	40	10000	1200	1080	4100	82	25				151	1,2,4,6
	18	10.0	17174	F18BXSPX30RS10PK	40	20000	1250	1130	3000	82	50				151	1,2,6,13
	18	10.5	17175	F18BXSPX35RS10PK	40	20000	1250	1130	3500	82	50				151	1,2,6,13
	18	10.5	17176	F18BXSPX41RS10PK	40	20000	1250	1130	4100	82	50				151	1,2,6,13
	18	10.5	12521	F18BX/SPX65/RS	40	20000	1160	1050	6500	82	50				151	1,2,6,13
	27	4.9	16944	F27BXSPX30RS10PK	40	12000	1800	1620	3000	82	50				151	1,2,6,13
	27	12.8	16948	F27BXSPX35RS10PK	40	12000	1800	1620	3500	82	50				151	1,2,6,13
	27	12.8	16951	F27BXSPX41RS10PK	40	12000	1800	1620	4100	82	50				151	1,2,6,13
	39		16538	F39BXSPX30RS10PK	40	12000	2850	2510	3000	82	50				151	1,2,6,13
	39	16.5	15867	F39BXSPX35RS10PK	40	12000	2850	2510	3500	82	50				151	1,2,6,13
	39	16.5	16952	F39BXSPX41RS10PK	40	12000	2850	2510	4100	82	50				151	1,2,6,13
	40	22.5	16953	F4030BXSPX30 10P	40	20000	3150	2840	3000	82	50				151	1,2,6,13
	40	22.5	20444	F40/30BXSPX30-36	36	20000	3150	2840	3000	82	50			Bulk Pack	151	1,2,6,13
	40	22.5	16648	F40/30BX/SPX35	40	20000	3150	2840	3500	82	50				151	1,2,6,13
	40	22.5	20446	F40/30BXSPX35-36	36	20000	3150	2840	3500	82	50			Bulk Pack	151	1,2,6,13
	40	22.5	16954	F40/30BX/SPX41	40	20000	3150	2840	4100	82	50				151	1,2,6,13
	40	22.5	20447	F40/30BXSPX41-36	36	20000	3150	2840	4100	82	50			Bulk Pack	151	1,2,6,13
	40	22.5	10490	F40/30BX/SPX50RS	36	20000	2900	2700	5000	80	50			Bulk Pack	151	1,2,6,13
	50	22.5	20898	F50BXSPX30RS10PK	40	14000	4000	3400	3000	82	50				151	1,2,6,13
	50	22.5	20899	F50BXSPX35RS10PK	40	14000	4000	3400	3500	82	50				151	1,2,6,13
	50	22.5	20900	F50BXSPX41RS10PK	40	14000	4000	3400	4100	82	50				151	1,2,6,13
	55	20.7	31951	F55BX/830	25	10000	4800	4080	3000	82	50				151	1,2,6,13
	55	20.7	31952	F55BX/835	25	10000	4800	4080	3500	82	50				151	1,2,6,13
	55	20.7	31953	F55BX/840	25	10000	4800	4080	4100	82	50				151	1,2,6,13
	55	5.8	45851	F55BX/AR/FS 6PK	6	10000	4800	4080	9325	67	50			Fresh and Salt Water Phosphor	151	1,2,6,13
	55		45859	F55BX/AR/FS/BULK	25	10000	4800	4080	9325	67	50			Fresh and Salt Water Phosphor	151	1,2,6,13

Compact Fluorescent Lamps

Base	Watts	Nom. Length (in)	Order Code	Description	Case Qty	Rated Life (hrs)	Rated Life @ 12 Hrs	Initial Lumens	Mean Lumens	Color Temp K	CRI	Min Starting Temp (°F)	TCLP Compliant Plug-Ins	EOL Protection Plug-Ins	Additional Information	Caution Notice	Footnotes			
Plug-in Lamps (continued)																				
2-Pin Double Biax®																				
	G23-2	9	4.3	97576	F9DBX23/827/ECO	50	10000		550	470	2700	82		*		151	1,2,17			
		9	5.43	97575	F9DBX23/841/ECO	50	10000		550	470	4100	82		*		151	1,2,17			
	GX23-2	13	4.7	97586	F13DBX23/827/ECO	50	10000		810	685	2700	82		*		151	1,2,17			
		13	4.7	97585	F13DBX/827/CD	6	10000		810	685	2700	82		*		Carded	151	1,2,17		
		13	4.7	97587	F13DBX23/830/ECO	50	10000		810	685	3000	82		*			151	1,2,17		
		13	4.7	97588	F13DBX23/835/ECO	50	10000		810	685	3500	82		*			151	1,2,17		
	G24d-1	13	4.7	97589	F13DBX23/841/ECO	50	10000		810	685	4100	82		*			151	1,2,17		
		13	5.3	97590	F13DBX/827/ECO	50	10000		900	755	2700	82		*			151	1,2,17		
		13	5.3	97591	F13DBX/830/ECO	50	10000		900	755	3000	82		*			151	1,2,17		
		13	5.3	97592	F13DBX/835/ECO	50	10000		900	755	3500	82		*			151	1,2,17		
	G24d-2	13	5.3	97593	F13DBX/841/ECO	50	10000		900	755	4100	82		*			151	1,2,17		
		18	6.1	97577	F18DBX/827/ECO	50	10000		1200	980	2700	82		*			151	1,2,5,17		
		18	6.1	97578	F18DBX/830/ECO	50	10000		1200	980	3000	82		*			151	1,2,5,17		
		18	6.1	97579	F18DBX/835/ECO	50	10000		1200	980	3500	82		*			151	1,2,5,17		
	G24d-3	18	6.1	97580	F18DBX/841/ECO	50	10000		1200	980	4100	82		*			151	1,2,5,17		
		26	6.7	97606	F26DBX/827/ECO	50	10000		1710	1460	2700	82		*			151	1,2,17		
		26	6.7	97607	F26DBX/830/ECO	50	10000		1710	1460	3000	82		*			151	1,2,17		
		26	6.7	97608	F26DBX/835/ECO	50	10000		1710	1460	3500	82		*			151	1,2,17		
		26	6.7	97609	F26DBX/841/ECO	50	10000		1710	1460	4100	82		*			151	1,2,17		
		26	6.7	97602	F26DBX/E/827/ECO	50	10000		1710	1460	2700	82		*		Internal Electronic Starter	151	1,2,15,17		
		26	6.7	97603	F26DBX/E/830/ECO	50	10000		1710	1460	3000	82		*		Internal Electronic Starter	151	1,2,15,17		
		26	6.7	97604	F26DBX/E/835/ECO	50	10000		1710	1460	3500	82		*		Internal Electronic Starter	151	1,2,15,17		
26	6.7	97605	F26DBX/E/841/ECO	50	10000		1710	1460	4100	82		*		Internal Electronic Starter	151	1,2,15,17				
4-Pin Double Biax®																				
	G24q-1	13	5.0	97594	F13DBX/827/ECO4P	50	12000 20000			755	2700	82		*	▲		151	1,2,6,17		
		13	5.0	97595	F13DBX/830/ECO4P	50	12000 20000		900	755	3000	82		*	▲		151	1,2,6,17		
		13	5.0	97596	F13DBX/835/ECO4P	50	12000 20000		900	755	3500	82		*	▲		151	1,2,6,17		
		13	5.0	97597	F13DBX/841/ECO4P	50	12000		900	755	4100	82		*	▲		151	1,2,6,17		
	G24q-2	18	5.8	97598	F18DBX/827/ECO4P	50	12000 20000		1200	970	2700	82		*	▲		151	1,2,5,6,17		
		18	5.8	97599	F18DBX/830/ECO4P	50	12000 20000		1200	970	3000	82		*	▲		151	1,2,5,6,17		
		18	5.8	97600	F18DBX/835/ECO4P	50	12000 20000		1200	970	3500	82		*	▲		151	1,2,5,6,17		
		18	5.8	97601	F18DBX/841/ECO4P	50	12000 20000		1200	970	4100	82		*	▲		151	1,2,5,6,17		
	G24q-3	26	6.4	97610	F26DBX/827/ECO4P	50	12000	20000	1710	1440	2700	82		*	▲		151	1,2,6,17		
		26	6.4	97611	F26DBX/830/ECO4P	50	12000	20000	1710	1440	3000	82		*	▲		151	1,2,6,17		
		26	6.4	97612	F26DBX/835/ECO4P	50	12000	20000	1710	1440	3500	82		*	▲		151	1,2,6,17		
		26	6.4	97613	F26DBX/841/ECO4P	50	12000	20000	1710	1440	4100	82		*	▲		151	1,2,6,17		
4-Pin Triple Biax®																				
	GX24q-1	13	4.2	97623	F13TBX827/4P/ECO	10	12000	20000	900	755	2700	82		*	▲	Non-Amalgam	151	1,2,6,17		
		13	4.2	97619	F13TBX/827/A/ECO	10	12000	20000	900	755	2700			*	▲		151	1,2,6,12,17		
		13	4.2	97620	F13TBX/830/A/ECO	10	12000	20000	900	755	3000			*	▲		151	1,2,6,12,17		
		13	4.2	97621	F13TBX/835/A/ECO	10	12000	20000	900	755	3500	82		*	▲		151	1,2,6,12,17		
	GX24q-2	13	4.2	97622	F13TBX/841/A/ECO	10	12000	20000	900	755	4100			*	▲		151	1,2,6,12,17		
		18	4.8	97628	F18TBX827/4P/ECO	10	12000	20000	1200	1010	2700	82		*	▲	Non-Amalgam	151	1,2,6,17		
		18	4.8	97624	F18TBX/827/A/ECO	10	12000	20000	1200	1010	2700	82		*	▲		151	1,2,6,12,17		
		18	4.8	97625	F18TBX/830/A/ECO	10	12000	20000	1200	1010	3000			*	▲		151	1,2,6,12,17		
	GX24q-2	18	4.8	97626	F18TBX/835/A/ECO	10	12000	20000	1200	1010	3500	82		*	▲		151	1,2,6,12,17		
		18	4.8	97627	F18TBX/841/A/ECO	10	12000	20000	1200	1020	4100	82		*	▲		151	1,2,6,12,17		
			GX24q-3	26	5.2	97618	F26TBX827/4P/ECO	10	12000	20000	1710	1440	2700	82		*	▲	Non-Amalgam	151	1,2,6,17
				26	5.2	97614	F26TBX/827/A/ECO	10	12000	20000	1710	1440	2700	82		*	▲		151	1,2,6,12,17
26	5.2			97615	F26TBX/830/A/ECO	10	12000	20000	1710	1440	3000	82		*	▲		151	1,2,6,12,17		
26	5.2			97616	F26TBX/835/A/ECO	10	12000	20000	1710	1440	3500	82		*	▲		151	1,2,6,12,17		
26	5.2	97617	F26TBX/841/A/ECO	10	12000	20000	1710	1440	4100	82		*	▲		151	1,2,6,12,17				
	GX24q-3	32	5.5	97629	F32TBX/827/A/ECO	10	12000	20000	2200	1850	2700	82		*	▲		151	1,2,6,12,17		

For the most up-to-date product information, see www.gelighting.com. To convert inches to millimeters, multiply by 25.4. All footnotes and caution notices found at the end of this section (page 5-15).

Base	Watts	Nom. Length (in)	Order Code	Description	Case Qty	Rated Life (hrs)	Rated Life 12 Hrs	Initial Lumens	Mean Lumens	Color Temp K	CRI	Min Starting Temp (°F)	TCLP Compliant Plug-Ins	EOL Protection Plug-Ins	Additional Information	Caution Notice	Footnotes	
Plug-in Lamps (continued)																		
4-Pin Triple Biax® (continued)																		
	GX24q-3	32	5.5	97630	F32TBX/830/A/ECO	10	12000	20000	2200	1850	3000	82		*	▲		151	1,2,6,12,17
		32	5.5	97631	F32TBX/835/A/ECO	10	12000	20000	2200	1850	3500	82		*	▲		151	1,2,6,12,17
		32	5.5	97632	F32TBX/841/A/ECO	10	12000	20000	2200	1850	4100	82		*	▲		151	1,2,6,12,17
	GX24-q4	42	6.4	97633	F42TBX/827/A/ECO	10	12000	20000	3200	2690	2700	82		*	▲		151	1,2,6,12,17
		42	6.4	97634	F42TBX/830/A/ECO	10	12000	20000	3200	2690	3000	82		*	▲		151	1,2,6,12,17
		42	6.4	97635	F42TBX/835/A/ECO	10	12000	20000	3200	2690	3500	82		*	▲		151	1,2,6,12,17
	42	6.4	97636	F42TBX/841/A/ECO	10	12000	20000	3200	2690	4100	82		*	▲		151	1,2,6,12,17	
4-Pin High Output Biax®																		
	GX24-q5	57	7.1	48861	F57QBX827A4P/EOL	10	12000		4300	3700	2700	82		*	▲		151	1,2,6,12,17
		57	7.1	48862	F57QBX830A4P/EOL	10	12000		4300	3700	3000	82		*	▲		151	1,2,6,12,17
		57	7.1	48863	F57QBX835A4P/EOL	10	12000		4300	3700	3500	82		*	▲		151	1,2,6,12,17
		57	7.1	48864	F57QBX/841/A/ECO	10	12000		4300	3700	4100	82		*	▲		151	1,2,6,12,17
	GX24-q6	57	5.2	93404	F57QBX850A4P/EOL	10	12000		4300	3700	5000	82		*	▲		151	1,2,6,12,17
		70	8.2	48865	F70QBX827A4P/EOL	10	12000		5200	4470	2700	82		*	▲		151	1,2,6,12,17
		70	8.2	48866	F70QBX830A4P/EOL	10	12000		5200	4470	3000	82		*	▲		151	1,2,6,12,17
		70	8.2	48867	F70QBX835A4P/EOL	10	12000		5200	4470	3500	82		*	▲		151	1,2,6,12,17
		70	8.2	48868	F70QBX/841/A/ECO	10	12000		5200	4470	4100	82		*	▲		151	1,2,6,12,17
	70	8.2	93406	F70QBX850A4P/EOL	10	12000		5200	4470	5000	82		*	▲		151	1,2,6,12,17	
4-Pin 2D®																		
	GR10q-4	10	3.6	21301	F102D/827/4P	60	10000		650	545	2700	82					151	1,2,3,6
		16	5.5	22169	F162D/827/4P	50	10000		1050	880	2700	82					151	1,2,3,6
		16	5.5	22177	F162D/835/4P	50	10000		1050	880	3500	82					151	1,2,3,6
		21	5.5	21303	F212D/827/4P	50	10000		1350	1135	2700	82					151	1,2,3,6
		21	5.5	22178	F212D/835/4P	50	10000		1350	1135	3500	82					151	1,2,3,6
		28	8.1	22172	F282D/827/4P	20	10000		2050	1720	2700	82					151	1,2,3,6
		28	8.1	22180	F282D/835/4P	20	10000		2050	1720	3500	82					151	1,2,3,6
		38	8.1	21305	F382D/827/4P	20	10000		2850	2395	2700	82		*			151	1,2,3,6
		38	8.1	25427	F382D/827/4P/CD	5	10000		2850	2395	2700	82		*		Carded	151	1,2,3,6
	38	8.1	22181	F382D/835/4P	20	10000		2850	2395	3500	82		*			151	1,2,3,6	
	GRY10q-3	55	8.1	36358	F552D/830A/4P/B	20	10000		4000	3400	3000	82				Torchiere Replacement Lamp	151	1,2,3,6
		55	8.1	40184	F552D/830/4P/CD	5	10000		4000	3400	3000	82				Torchiere Replacement Lamp, Carded	151	1,2,3,6

Compact Fluorescent Lamps

勝 特 力 材 料 886-3-5753170
胜特力电子(上海) 86-21-34970699
胜特力电子(深圳) 86-755-83298787
Http://www.100y.com.tw

Base	Watts	Nominal Length (in)	Order Code	Description	Case Qty	Volts	Rated Life (hrs)	Initial Lumens	Mean Lumens	Color Temp K	CRI	Min. Start. Temp (°F)	Power Factor	THD	ENERGY STAR® Screw-Ins	Additional Information	Caution Notice	Footnotes	
Self-Ballasted Lamps																			
Spiral®																			
	Med	10	4.4	15829	FLE10HT3/2/827	10	120	8000	520	420	2700	82	5	0.6	120	★	T3 Spiral®, Boxed	153	1,7,8,9,10
		10	4.4	49906	FLE10HT3/2/SW/CD	12	120	8000	520	420	2700	82	5	0.6	120	★	T3 Spiral®, Carded Single Pack	153	1,7,8,9,10
		10	4.4	49907	FLE10HT32SWCD2PK	3	120	8000	520	420	2700	82	5	0.6	120	★	T3 Spiral®, Carded Twin Pack	153	1,7,8,9,10
		10	4.4	25182	FLE10HT3/2/841	10		8000	520	420	4100	82	5	0.6		★	T3 Spiral®, Boxed	153	1,7,8,9,10
		10	4.4	89082	FLE10HT3/2/D/CD	12	120	8000	500	400	6500	82	5	0.6	120	★	Carded Single Pack		
		10	4.4	85393	FLE10HT3/2/D/2PK	3	120	8000	500	400	6500	82	5	0.6	120	★	T3 Spiral®, Carded Twin Pack	153	1,7,8,9,10
		10	4.4	80936	FLE10HT3/2/XL	10	120	12000	550	440	2700	82	5	0.6	120	★	T3 Spiral®, Boxed	153	1,7,8,9,10
		10	4.4	47430	FLE10HT3/2/XL/CD	12	120	12000	550	440	2700	82	5	0.6	120	★	T3 Spiral®, Carded Single Pack	153	1,7,8,9,10
		10	4.4	49671	FLE10HT3/2/XL2PK	3	120	12000	550	440	2700	82	5	0.6	120	★	T3 Spiral®, Carded Twin Pack	153	1,7,8,9,10
		10	3.7	86241	FLE10HT2/2/827	10	120	12000	580	460	2700	82	5	0.5	120	★	T2 Spiral®, Boxed	153	1,7,8,9,10
	10	3.7	85382	FLE10HT2/2/SW/CD	3	120	12000	580	464	2700	82	5	0.5	120	★	T2 Spiral®, Carded Single Pack	153	1,7,8,9,10	
	Med	13	4.7	16460	FLE13HT3/2/SW/CD	12	120	8000	825	660	2700	82	5	0.6	120	★	T3 Spiral®, Carded Single Pack	153	1,7,8,9,10
		13	4.7	16459	FLE13HT3/2/SW/2P	3	120	8000	825	660	2700	82	5	0.6	120	★	T3 Spiral®, Carded Twin Pack	153	1,7,8,9,10
		13	4.7	21760	FLE13HT3/2/10PK	10	120	8000	825	660	2700	82	5	0.6	120	★	T3 Spiral®, Consumer 10-Pack	153	1,7,8,9,10
		13	4.7	71763	FLE13HT3/2/6STP	6	120	6000	855	685	5000	82	5	0.6	145	★	T3 Spiral®, Tray Pack	153	1,7,8,9,10
		13	3.9	86256	FLE13HT2/2/827	10	120	12000	870	695	2700	82	5	0.5	120	★	T2 Spiral®, Boxed	153	1,7,8,9,10
		13	3.9	85383	FLE13HT2/2/SW/CD	3	120	12000	870	750	2700	82	5	0.6	120	★	T2 Spiral®, Carded Single Pack	153	1,7,8,9,10
	Med	15	4.8	15831	FLE15HT3/2/827	10	120	8000	950	765	2700	82	5	0.6	145	★	T3 Spiral®, Boxed	153	1,7,8,9,10
		15	4.8	25183	FLE15HT3/2/841	10	120	8000	950	765	4100	82	5	0.6	145	★	T3 Spiral®, Boxed	153	1,7,8,9,10
		15	4.8	89091	FLE15HT3/2/D/CD	3	120	8000	900	738	6500	82	5	0.6	145	★	Carded Single Pack		
		15	4.8	85394	FLE15HT3/2/D/2PK	3	120	8000	900	738	6500	82	5	0.6	145	★	T3 Spiral®, Carded Twin Pack	153	1,7,8,9,10
		15	4.8	80937	FLE15HT3/2/XL/SW	10	120	12000	950	765	2700	82	5	0.6	145	★	T3 Spiral®, Boxed	153	1,7,8,9,10
		15	4.8	47435	FLE15HT3/2/XL/CD	12	120	12000	950	765	2700	82	5	0.6	145	★	T3 Spiral®, Carded Single Pack	153	1,7,8,9,10
		15	4.8	49680	FLE15HT3/2/XL2PK	3	120	12000	950	765	2700	82	5	0.6	145	★	T3 Spiral®, Carded Twin Pack	153	1,7,8,9,10
		15	4.1	86271	FLE15HT2/2/827	10	120	12000	950	760	2700	82	5	0.5	120	★	T2 Spiral®, Boxed	153	1,7,8,9,10
		15	4.1	85385	FLE15HT2/2/SW/CD	12	120	8000	950	765	2700	82	5	0.6	145	★	T2 Spiral®, Carded Single Pack	153	1,7,8,9,10
		15	5.2	89619	FLE15HT3/2/DV	10	120	10000	900	720	2700	82	5	0.6	120	★	Dimming, Boxed	152	1,7,8,9,14
	15	5.2	89623	FLE15HT3/2/DV/CD	12	120	10000	900	720	2700	82	5	0.6	120	★	Dimming, Carded Single Pack	152	1,7,8,9,14	
	Med	20	4.7	15834	FLE20HT3/2/827	10	120	8000	1200	965	2700	82	5	0.6	135	★	T3 Spiral®, Boxed	153	1,7,8,9,10
		20	4.7	15516	FLE20HT3/2/SW/CD	12	120	8000	1200	965	2700	82	5	0.6	135	★	T3 Spiral®, Carded Single Pack	153	1,7,8,9,10
		20	4.7	15518	FLE20HT3/2/SW/2P	3	120	8000	1200	965	2700	82	5	0.6	135	★	T3 Spiral®, Carded Twin Pack	153	1,7,8,9,10
		20	4.7	25186	FLE20HT3/2/841	10	120	8000	965	965	4100	82	5	0.6	135	★	T3 Spiral®, Boxed	153	1,7,8,9,10
		20	4.7	80888	FLE20HT3/2/XL827	10	120	12000	1300	1040	2700	82	5	0.6	135	★	T3 Spiral®, Boxed	153	1,7,8,9,10
		20	4.7	71764	FLE20HT3/2/6S/TP	6	120	6000	1235	990	5000	82	5	0.6	145	★	T3 Spiral®, Tray Pack	153	1,7,8,9,10
		20	4.7	89094	FLE20HT3/2/D/CD	12	120	8000	1150	945	6500	82	5	0.6	145	★	Carded Single Pack	153	1,7,8,9,14
		20	4.8	85396	FLE20HT3/2/D/2PK	3	120	8000	1150	945	6500	82	5	0.6	135	★	T3 Spiral®, Carded Twin Pack	153	1,7,8,9,10
		20	4.8	47442	FLE20HT3/2/XL/CD	12	120	12000	1300	1040	2700	82	5	0.6	135	★	T3 Spiral®, Carded Single Pack	153	1,7,8,9,10
		20	4.8	49684	FLE20HT3/2/XL2PK	3	120	12000	1300	1040	2700	82	5	0.6	135	★	T3 Spiral®, Carded Twin Pack	153	1,7,8,9,10
	Med	20	4.8	47466	FLE20HT3/2/XL/D	12	120	12000	1250	1000	6500	82	5	0.6	135	★	T3 Spiral®, Carded Single Pack, Daylight	153	1,7,8,9,10
		20	4.5	72880	FLE20HT2/2/XL/CD	3	120	12000	1250	1000	2700	82	5	0.6	120	★	T3 Spiral®, Carded	153	1,7,8,9,10
	Med	23	5.1	80889	FLE23HT3/2/XL827	10	120	12000	1600	1280	2700	82	5	0.6	135	★	T3 Spiral®, Boxed	153	1,7,8,9,10
		23	5.1	47445	FLE23HT3/2/XL/CD	12	120	12000	1600	1280	2700	82	5	0.6	135	★	T3 Spiral®, Carded Single Pack	153	1,7,8,9,10
	Med	26	5.1	89095	FLE26HT3/2/D/CD	12	120	8000	1600	1280	6500	82	5	0.6	120	★	Carded Single Pack	153	1,7,8,9,10
		26	5.2	15836	FLE26HT3/2/827	10	120	8000	1700	1365	2700	82	5	0.6	120	★	T3 Spiral®, Boxed	153	1,7,8,9,10
		26	5.2	15517	FLE26HT3/2/SW/CD	12	120	8000	1700	1365	2700	82	5	0.6	120	★	T3 Spiral®, Carded Single Pack	153	1,7,8,9,10
		26	5.2	71765	FLE26HT3/2/6STP	6	120	6000	1660	1325	5000	82	5	0.6	145	★	T3 Spiral®, Tray Pack	153	1,7,8,9,10

For the most up-to-date product information, see www.gelighting.com. To convert inches to millimeters, multiply by 25.4. All footnotes and caution notices found at the end of this section (page 5-15).

Base	Watts	Nominal Length (in)	Order Code	Description	Case Qty	Volts	Rated Life (hrs)	Initial Lumens	Mean Lumens	Color Temp K	CRI	Min. Start. Temp (°F)	Power Factor	THD	ENERGY STAR® Screw-Ins	Additional Information	Caution Notice	Footnotes	
Self-Ballasted Lamps (continued)																			
Spiral® (continued)																			
	Med	26	5.1	85397	FLE26HT3/2/D/2PK	3	120	8000	1600	1315	6500	82	5	0.6	120	★	T3 Spiral®, Carded Twin Pack	153	1,7,8,9,10
		26	5.2	15519	FLE26HT3/2/SW/2P	3	120	8000	1700	1365	2700	82	5	0.6	120	★	T3 Spiral®, Carded Twin Pack	153	1,7,8,9,10
		26	5.2	21845	FLE26HT3/2/10PK	10	120	8000	1700	1365	2700	82	5	0.6	120	★	T3 Spiral®, Consumer 10 Pack	153	1,7,8,9,10
		26	5.2	25195	FLE26HT3/2/841	10	120	8000	1700	1365	4100	82	5	0.6	120	★	T3 Spiral®, Boxed	153	1,7,8,9,10
		26	5.2	80890	FLE26HT3/2/XL827	10	120	12000	1700	1365	2700	82	5	0.6	120	★	T3 Spiral®, Boxed	153	1,7,8,9,10
		26	5.8	89621	FLE26HT3/2/DV	10	120	10000	1700	1360	2700	82	5	0.6	120	★	Dimming, Boxed	152	1,7,8,9,14
		26	5.8	89624	FLE26HT3/2/DV/CD	12	120	10000	1700	1360	2700	82	5	0.6	120	★	Dimming, Carded Single Pack	152	1,7,8,9,14
		26	5.1	47446	FLE26HT3/2/XL/CD	12	120	12000	1700	1365	2700	82	5	0.6	120	★	T3 Spiral®, Carded Single Pack	153	1,7,8,9,10
		26	5.1	49685	FLE26HT3/2/XL2PK	3	120	12000	1700	1365	2700	82	5	0.6	120	★	T3 Spiral®, Carded Twin Pack	153	1,7,8,9,10
		26	4.8	72881	FLE26HT2/2/XL/CD	3	120	12000	1650	1320	2700	82	5	0.6	120	★	T2 Spiral®, Carded	153	1,7,8,9,10
	Med	29	6.3	81514	FLE29HLX/2XL/827	10	120	12000	2200	1760	2700	82	5	0.6	170	★	T4 Spiral®, Boxed	153	1,7,8,9,10
		29	6.3	47459	FLE29HLX/2/XL/CD	12	120	12000	2200	1760	2700	82	5	0.6	170	★	T4 Spiral®, Carded Single Pack	153	1,7,8,9,10
		12 23 29	6.3	81515	FLE29HLX/2D3/827	10	120	10000	600/1600/2150	480/1280/1740	2700	82	5	0.6	170	★	T3 Spiral®, Boxed, 3-Way	155	1,7,8,9,10
		12 23 29	6.3	47448	FLE29HLX/2/D3/CD	12	120	10000	600/1600/2150	480/1280/1740	2700	82	5	0.6	170	★	T3 Spiral®, Carded Single Pack, 3-Way	155	1,7,8,9,10
		42	6.4	80891	FLE42HLX/2/XL827	10	120	12000	2700	2160	2700	82	5	0.6	170	★	T4 Spiral®, Boxed	153	1,7,8,9,10
		42	6.9	47452	FLE42HLX/2/XL/CD	12	120	12000	2700	2160	2700	82	5	0.6	170	★	T4 Spiral®, Carded Single Pack	153	1,7,8,9,10
Biax®																			
 	Med	12	4.4	20702	FLE12TT3/827	10		15000	600	480	2700	82	5	0.6	120	★	T3 Triple Biax®, Boxed	153	1,7,8,9,10,12
		14	5.9	49884	FLE14TBX/2/SW/CD	12	120	8000	850	685	2700	82	5	0.6	120	★	Triple Biax®, Carded Single Pack	153	1,7,8,9,10
		15	4.9	12004	FLE15TT3/827	10	120	15000	900	720	2700	82	5	0.6	145		T3 Triple Biax®, Boxed	153	1,7,8,9,10,12
		20	5.5	12008	FLE20TT3/827	10	120	15000	1200	960	2700	82	5	0.6	130	★	T3 Triple Biax®, Boxed	153	1,7,8,9,10,12
		20	6.9	49885	FLE20TBX/2/SW/CD	12	120	8000	1200	965	2700	82	5	0.6	120	★	Triple Biax®, Carded Single Pack	153	1,7,8,9,10
		24	5.6	23669	FLE24QBX/A/827	6	120	18000	1520	1290	2700	82	-9	0.6	170	★	Boxed	153	1,7,8,9,10,12
		27	6.9	49887	FLE27QBX/2/SW/CD	12	120	6000	1700	1365	2700	82	5	0.6	130	★	Quad Biax®, Carded Single Pack	153	1,7,8,9,10
		28	6.3	40351	FLE28QBX/LLCD	3	120	12000	1750	1485	2700	82	-9	0.6	170		Soft White, Quad Biax®, Carded	153	1,7,8,9,10,12
		28	5.9	46270	FLE28QBX/X/A/827	6	120	12000	1750	1485	2700	82	-9	0.6	170			153	1,7,8,9,10,12
		29	6.3	41457	FLE29QBX/DV/827	6	120	10000	1750	1500	2700	82	-9	0.6	170		Dimming	156	1,7,8,9,12,14
Reflectors																			
	Med	11	4.7	80892	FLE11/2/R20XL827	10	120	10000	400	320	2700	82	5	0.6	120	★	Soft White, R20 Glass Reflector, Boxed	157	1,8,9,10,12
		11	4.7	47477	FLE11/2/R20XL/CD	12	120	10000	400	320	2700	82	5	0.6	120	★	Soft White, R20 Glass Reflector, Carded Single Pack	157	1,8,9,10,12
	Med	15	5.4	20708	FLE15/2/R30/SWCD	12	120	8000	700	565	2700	82	5	0.6	120	★	Soft White, R30 Glass Reflector, Carded Single Pack	158	1,8,9,10,12
		15	5.5	80893	FLE15/2/R30XL827	10	120	10000	750	600	2700	82	5	0.6	120	★	Soft White, R30 Glass Reflector, Boxed	157	1,8,9,10,12
		15	5.3	47478	FLE15/2/R30XL/CD	12	120	10000	750	600	2700	82	5	0.6	120	★	Soft White, R30 Glass Reflector, Carded Single Pack	157	1,8,9,10,12
		15	5.6	21709	FLE15/2/DV/R30	6	120	6000	700	565	2700	82	5	0.6	170	★	Dimming, Soft White, R30 Glass Reflector, Boxed	165	1,8,9,10,14
		15	5.6	21710	FLE15/2DV/R30SWCD	3	120	6000	700	565	2700	82	5	0.6	170	★	Dimming, Soft White, R30 Glass Reflector, Carded Single Pack	165	1,8,9,12,14
		15	5.6	89617	FLE15/2/R30/PINK	10	120	10000	700	560			5	0.5	120		Pink	157	1,8,9,10,12
	Med	26	6.5	21738	FLE26/2/R40/SWCD	3	120	6000	1300	1040	2700	82	5	0.6	170	★	Soft White, R40 Glass Reflector, Carded Single Pack	158	1,8,9,10,12
		26	6.5	80894	FLE26/2/R40XL827	6	120	10000	1300	1040	2700	82	5	0.6	120	★	Soft White, R40 Glass Reflector, Boxed	157	1,8,9,10,12
		26	6.5	47479	FLE26/2/R40XL/CD	3	120	10000	1300	1040	2700	82	5	0.6	120	★	Soft White, R40 Glass Reflector, Carded Single Pack	157	1,8,9,10,12

Compact Fluorescent Lamps

勝 特 力 材 料 886-3-5753170

胜特力电子(上海) 86-21-34970699

胜特力电子(深圳) 86-755-83298787

Http://www.100y.com.tw

Base	Watts	Nominal Length (in)	Order Code	Description	Case Qty	Volts	Rated Life (hrs)	Initial Lumens	Mean Lumens	Color Temp K	CRI	Min. Start. Temp (°F)	Power Factor	THD	ENERGY STAR® Screw-Ins	Additional Information	Caution Notice	Footnotes
Self-Ballasted Lamps (continued)																		
Reflectors (continued)																		
	26		21716	FLE26/2/DV/R40	6	120	6000	1200	970	2700	82	5	0.6	170	★	Dimming, Soft White, R40 Glass Reflector, Boxed	165	1,8,9,12,14
	26	6.9	21718	FLE26/2DVR40SWCD	3	120	6000	1200	970	2700	82	5	0.6	170	★	Dimming, Soft White, R40 Glass Reflector, Carded Single Pack	165	1,8,9,12,14
	26	6.6	89618	FLE26/2/R40/PINK	10	120	10000	1400	1120			5	0.5	120		Pink	157	1,8,9,10,12
	26	5.5	21739	FLE26/2/PAR38/CD	3	120	6000	1200	970	2700	82	5	0.6	120	★	Soft White, Par 38 Glass Reflector, Carded Single Pack	164	1,8,9,12,16
	26	5.5	80895	FLE26/2/PAR38/XL	6	120	10000	1300	1040	2700	82	5	0.6	120	★	Soft White, Par 38 Glass Reflector, Boxed, Wet Rated	166	1,8,9,12,16
	26	5.6	47483	FLE26/2PAR38XCD	3	120	10000	1300	1040	2700	82	5	0.6	120	★	Soft White, Par 38 Glass Reflector, Carded Single Pack, Wet Rated	166	1,8,9,12,16
	23	5.3	73265	FLE23/3/PAR38FL	6	120	8000	1000		2700	82	5	0.5	150		Flat Lens PAR38	166	1,8,9,12,16
Genura®																		
	23	4.9	25418	EL23/R25/SW	6	120	15000	1100	880	2700	82	32	0.6	130		Genura® Electrodeless Design, Soft White	160	1,8,9,10
	23	4.9	12273	EL23/R25/WW	6	120	15000	1100	880	3000	82	32	0.6	130		Genura® Electrodeless Design, RE 830 Phosphor, Warm White	160	1,8,9,10
Decorative Shapes																		
	5	4.8	16098	FLE5/2/CAC/827	10	120	6000	200	160	2700	82	5	0.6	145		Candle Shape, Candelabra Base, Boxed	157	1,8,10,12
	5	4.8	16099	FLE5/2/CAM/827	10	120	6000	200	160	2700	82	5	0.6	145		Candle Shape, Medium Base, Boxed	157	1,8,10,12
Cand	7	5.2	16103	FLE7/2/CAC/827	10	120	6000	370	296	2700	82	5	0.6	130		Candle Shape, Candelabra Base, Boxed	157	1,8,10,12
Med	7	5.2	16104	FLE7/2/CAM/827	10	120	6000	370	296	2700	82	5	0.6	130	★	Candle Shape, Medium Base, Boxed	157	1,8,10,12
	9	5.4	85388	FLE9/2/CAC/SW/CD	12	120	6000	430	344	2700	82	5	0.6	125		Candle Shape, Candelabra Base, Carded Single Pack	157	1,8,10,12
	9	5.4	16105	FLE9/2/CAC/827	10	120	6000	430	344	2700	82	5	0.6	125		Candle Shape, Candelabra Base, Boxed	157	1,8,10,12
Med	9	5.4	47488	FLE9/2/CAM/XL/CD	12	120	10000	430	344	2700	82	5	0.6	125	★	Candle Shape, Medium Base, Carded Single Pack	157	1,8,10,12
	9	5.4	16106	FLE9/2/CAM/827	10	120	6000	430	344	2700	82	5	0.6	125	★	Candle Shape, Medium Base, Boxed	157	1,8,10,12
Med	10	4.2	89622	FLE11/2/A19XL	10	120	10000	500	400	2700	82	5	0.6	130	★	A-Line Shape, Boxed	157	1,8,10,12
	11	4.4	47486	FLE11/2/A17XL/CD	12	120	10000	500	400	2700	82	5	0.6	120	★	A-Line Shape, Carded Single Pack	157	1,8,10,12
	11	4.2	89629	FLE11/2/G25XL	10	120	10000	500	400	2700	82	5	0.6	130	★	Globe Shape, Boxed	157	1,8,10,12
	11	4.8	47484	FLE11/2/G25XL/CD	12	120	10000	500	400	2700	82	5	0.5	130	★	Globe Shape, Carded Single Pack	157	1,8,10,12
	11	4.1	89631	FLE11/2/T14XL	10	120	10000	500	400	2700	82	5	0.6		★	Bullet Shape, Boxed		1,8,10,12
	11	96.0	49894	FLE11/2TC14SW/CD	3	120	6000	520	420	2700	82	5	0.6	120	★	Post Light, Carded Single Pack	157	1,8,10,12
	11	96.0	49895	FLE11/2TC14BUGCD	3	120	6000	520	420	2700	82	5	0.6	120	★	Bug Yellow Post Light, Carded Single Pack	157	1,8,10,12
	14	5.0	85384	FLE14/2/TC16SWCD	12	120	10000	750	600	2700	82	5	0.5	150	★	Bullet Shape, Carded Single Pack		1,8,10,12
	14	5.0	47464	FLE14/2/TC16/BUG	12	120	10000	750		2700	82		0.5	150	★	Bug Yellow Post Light, Carded Single Pack	157	1,8,10,12
	15	4.6	89632	FLE15/2/A19XL	10	120	10000	825	660	2700	82	5	0.6	120	★	A-Line Shape, Boxed		1,8,10,12
	15	4.8	47487	FLE15/2/A21XL/CD	12	120	10000	825	660	2700	82	5	0.6	120	★	A-Line Shape, Carded Single Pack	157	1,8,10,12
	15	4.6	89633	FLE15/2/G25XL	10	120	10000	825	660	2700	82	5	0.5	150	★	Globe Shape, Boxed		1,8,10,12
	15	4.8	47485	FLE15/2/G25XL/CD	12	120	10000	825	660	2700	82	5	0.6	120	★	Globe Shape, Carded Single Pack	157	1,8,10,12
	15	4.7	21733	FLE15/2/A21/SWCD	12	120	8000	850	689	2700	82	5	0.6	120	★	A-Line Shape, Carded Single Pack	157	1,8,10,12
	20	5.4	89635	FLE20/2/T19XL	10	120	10000	1100	880	2700	82	5	0.6	130	★	Bullet Shape, Boxed		1,8,10,12
	20	5.7	89634	FLE20/2/A19XL	10	120	10000	1100	880	2700	82	5	0.6	130	★	A-Line Shape, Boxed	158	1,8,10,12
Med	26	6.0	89636	FLE26/2/T21XL	10	120	10000	1350	1080	2700	82	5	0.6	130	★	Bullet Shape, Boxed	157	1,8,10,12

For the most up-to-date product information, see www.gelighting.com. To convert inches to millimeters, multiply by 25.4. All footnotes and caution notices found at the end of this section (page 5-15).

Base	Watts	Nominal Length (in)	Order Code	Description	Case Qty	Volts	Rated Life (hrs)	Initial Lumens	Mean Lumens	Color Temp K	CRI	Min. Start. Temp (°F)	Power Factor	THD	ENERGY STAR® Screw-In	Additional Information	Caution Notice	Footnotes
Lamps and Adapters																		
Cirlcite®																		
	21	3.4	11307	FCA21/CD	4	120	10000	1200	1020	3000	82	50	0.5	20		Cirlcite® Carded, FC8T9/KB Replacement Lamp	163	1,7,10,11
Specialty																		
covrGuard® Spiral®																		
	15	4.8	71989	FLE15HT3/2/827/CVG	10	120	8000	900	765	2700	82	5	0.6	120		Shatter Resistant Coating		
	20	4.7	71988	FLE20HT3/2/827/CVG	10	120	8000	1300	1105	2700	82	5	0.6	120		Shatter Resistant Coating		
	26	5.2	71990	FLE26HT3/2/827/CVG	10	120	8000	1620	1375	2700	82	5	0.6	120		Shatter Resistant Coating		
	42	6.4	71991	FLE42HLX/2/XL827/CVG	10	120	8000	2525	2150	2700	82	5	0.6	120		Shatter Resistant Coating		
Blacklight																		
	9	5.7	42935	F9BX/BL	10	59	5000			Blacklight						Blacklight UVA Source 2-Pin Internal Starter. Lamp emits UV irradiation which may cause eye/skin irritation. RGI.	104	
	11	8.5	42936	F11BX/BL	10	91	5000			Blacklight						Blacklight UVA Source 2-Pin Internal Starter. Lamp emits UV irradiation which may cause eye/skin irritation. RGI.	104	
	13	6.7	42937	F13BX/BL	10	59	5000			Blacklight						Blacklight UVA Source 2-Pin Internal Starter. Lamp emits UV irradiation which may cause eye/skin irritation. RGI.	104	
	26	6.7	42938	F26DBX/BL	10	105	5000			Blacklight						Blacklight UVA Source 4-Pin Electronic. Lamp emits UV irradiation which may cause eye/skin irritation. RGI.	104	
	24	12.5	42939	F24BX/BL	10	75	5000			Blacklight						Blacklight UVA Source 4-Pin Electronic. Lamp emits UV irradiation which may cause eye/skin irritation. RGI.	104	
	36	16.3	42940	F36BX/BL	10	90	5000			Blacklight						Blacklight UVA Source 4-Pin Electronic. Lamp emits UV irradiation which may cause eye/skin irritation. RGI.	104	
	55	20.7	42941	F55BX/BL	10	101	5000			Blacklight						Blacklight UVA Source 4-Pin Electronic. Lamp emits UV irradiation which may cause eye/skin irritation. RGI.	104	
Blacklight Blue																		
2G11	36	16.3	88833	F36BX/BLB	10	90	5000			Blacklight						Blacklight, UVA Source 4-Pin Electronic, Internal Blue filter. Lamp emits UV irradiation which may cause eye/skin irritation. RGI.	104	
Germicidal																		
	5	3.4	40695	GBX5/UVC	10		8000									Clear, Preheat, 2-Pin Internal Starter, UVC Source. WARNING: Risk group 3 (High Risk): UV emitted from this lamp. Avoid exposure of eyes and skin to unshielded lamp. Skin or eye injury will result. Life rating is based on UV maintenance curve and is measured at 80% of initial (100 hr) UVC output.		

For the most up-to-date product information, see www.gelighting.com. To convert inches to millimeters, multiply by 25.4. All footnotes and caution notices found at the end of this section (page 5-15).

Compact Fluorescent Lamps

勝 特 力 材 料 886-3-5753170
胜特力电子(上海) 86-21-34970699
胜特力电子(深圳) 86-755-83298787
Http://www. 100y. com. tw

Base	Watts	Nominal Length (in)	Order Code	Description	Case Qty	Volts	Rated Life (hrs)	Initial Lumens	Mean Lumens	Color Temp K	CRI	Min. Start. Temp (°F)	Power Factor	THD	ENERGY STAR® Screw-In	Additional Information	Caution Notice	Footnotes
Germicidal (continued)																		
	9	5.7	40696	GBX9/UVC	10		8000									Clear, Preheat, 2-Pin Internal Starter, UVC Source. WARNING: Risk group 3 (High Risk): UV emitted from this lamp. Avoid exposure of eyes and skin to unshielded lamp. Skin or eye injury will result. Life rating is based on UV maintenance curve and is measured at 80% of initial (100 hr) UVC output.		
	11	8.8	40700	GBX11/UVC	10		8000									Clear, Preheat, 2-Pin Internal Starter, UVC Source. WARNING: Risk group 3 (High Risk): UV emitted from this lamp. Avoid exposure of eyes and skin to unshielded lamp. Skin or eye injury will result. Life rating is based on UV maintenance curve and is measured at 80% of initial (100 hr) UVC output.		
	13	6.7	40703	GBX13/UVC	10		8000									Clear, Preheat, 2-Pin Internal Starter, UVC Source. WARNING: Risk group 3 (High Risk): UV emitted from this lamp. Avoid exposure of eyes and skin to unshielded lamp. Skin or eye injury will result. Life rating is based on UV maintenance curve and is measured at 80% of initial (100 hr) UVC output.		
	18	8.8	40704	GBX18/UVC	40		8000									Clear, 4-Pin UVC Source. WARNING: Risk group 3 (High Risk): UV emitted from this lamp. Avoid exposure of eyes and skin to unshielded lamp. Skin or eye injury will result. Life rating is based on UV maintenance curve and is measured at 80% of initial (100 hr) UVC output.		
	36	16.3	40705	GBX36/UVC	40		8000									Clear, 4-Pin UVC Source. WARNING: Risk group 3 (High Risk): UV emitted from this lamp. Avoid exposure of eyes and skin to unshielded lamp. Skin or eye injury will result. Life rating is based on UV maintenance curve and is measured at 80% of initial (100 hr) UVC output.		
	55	20.7	40706	GBX55/UVC	25		8000									Clear, 4-Pin UVC Source. WARNING: Risk group 3 (High Risk): UV emitted from this lamp. Avoid exposure of eyes and skin to unshielded lamp. Skin or eye injury will result. Life rating is based on UV maintenance curve and is measured at 80% of initial (100 hr) UVC output.		

Base	Watts	Nominal Length (in)	Order Code	Description	Case Qty	Volts	Rated Life (hrs)	Initial Lumens	Mean Lumens	Color Temp K	CRI	Min. Start. Temp (°F)	Power Factor	THD	ENERGY STAR® Screw-In	Additional Information	Caution Notice	Footnotes
Germicidal (continued)																		
	60	16.3	72301	GBX60/UVC	25		8000									Clear, 4-Pin UVC Source. WARNING: Risk group 3 (High Risk): UV emitted from this lamp. Avoid exposure of eyes and skin to unshielded lamp. Skin or eye injury will result. Life rating is based on UV maintenance curve and is measured at 80% of initial (100 hr) UVC output.		
Film and TV Lighting HLBX 4-Pin																		
	55	20.7	41869	F55BX/STUDIOBX32	40		10000	4100		3200	86					High color rendering. Ideal for TV studios, live broadcasts. Color tuned to match tungsten and daylight light sources.		
	55	20.7	41873	F55BX/STUDIOBX56	40		10000	4100		5600	89					High color rendering. Ideal for TV studios, live broadcasts. Color tuned to match tungsten and daylight light sources.		
	55	20.7	41903	F55BX/CINPLUS/32	40		2000	2400		3200	92					High color rendering. Soft light used in film applications. GEL free light source. Matches the color spectrum of film. LB and CC +/-5.		
	55	20.7	41911	F55BX/CINPLUS/55	40		2000	2400		5500	95					High color rendering. Soft light used in film applications. GEL free light source. Matches the color spectrum of film. LB and CC +/-5.		

Footnotes


- 1

Fluorescent lamp lumens decline during life.

2

Based on 60Hz reference circuit.

3



10-watt, 16-watt and 28-watt 2D® lamps may be operated in any position. 21-watt, 38-watt, 39-watt and 55-watt 2D® lamps must be used with the leg marked (a) in the diagram below the bend (b), in order to avoid overheating the end of the cap marked (c).

4

Life ratings for the F18BX preheat lamps are based on operating the lamp at 3 hrs. per start on a preheat type circuit. Operation on rapid start and instant start ballasts is not recommended.

5

Cold cathode resistance is approximately 6.0 Ohms.

6

4-Pin lamp minimum starting temperature is a function of the ballast. Most ballasts are rated with a minimum starting temperature of 50°F (10°C). Ballasts are also available that provide reliable starting to 0°F (-18°C) and -20°F (-29°C).

7

Most one-piece self-ballasted lamps for incandescent sockets and plug-in lamps with screw-in adapters do not work with clip-on shades.

8

Lumens on one-piece self-ballasted lamp systems are measured base up.

9

Best performance if operated base up and at 77°F (25°C) ambient temperature.

10

Use only on 120V, 60Hz circuits. Do not use on dimming circuits, photocells or timers. Do not use in wet locations.

11

Adapters rated at 40,000 hours life.

12

Amalgam products experience stable brightness over a wider temperature range and in various operating positions.

13

Life ratings are based on operating the lamp at 3 hrs. per start on a rapid start type ballast. Life rating on a preheat or instant start ballast is 25% lower.

14

Use only on 120V, 60Hz circuits. Do not use on with photocells or timers. Do not use in wet locations.

15

These lamps are only recommended for use with single-lamp ballasts or parallel-wired 2-lamp ballasts.

16

UL Listed for wet locations. Use only on 120V, 60Hz circuits. Do not use on dimming circuits, photocells or timers.

17

Max. bulb wall temperature not to exceed 180°C. Consult GE sales representative for further information.
- 5-14
- For the most up-to-date product information, see www.gelighting.com. To convert inches to millimeters, multiply by 25.4. All footnotes and caution notices found at the end of this section (page 5-15).
- For the most up-to-date product information, see www.gelighting.com. To convert inches to millimeters, multiply by 25.4. All footnotes and caution notices found at the end of this section (page 5-15).
- 5-15

Caution Notices

151
⚠ CAUTION
Lamp may shatter and cause injury if broken

- Remove and install by grasping only plastic portion of the lamp

152
⚠ CAUTION
Risk of electric shock

- Do not use where directly exposed to water
- Do not open—no user serviceable parts inside

Lamp may shatter and cause injury if broken
• Remove and install by grasping only plastic portion of the lamp
This product complies with Part 18 of the FCC Rules, but may cause interference to radios, televisions, wireless telephones, and remote controls. Avoid placing this product near these devices. If interference occurs, move the product away from the device or plug either into a different outlet. Do not install this product near maritime safety equipment or other critical navigation or communication equipment operating between 0.45-30 MHz. Not intended for use with emergency exit fixtures or lights or in electronic timers.

153
⚠ CAUTION
Risk of electric shock

- Do not use where directly exposed to water
- Do not open—no user serviceable parts inside

Lamp may shatter and cause injury if broken
• Remove and install by grasping only plastic portion of the lamp
This product complies with Part 18 of the FCC Rules, but may cause interference to radios, televisions, wireless telephones, and remote controls. Avoid placing this product near these devices. If interference occurs, move the product away from the device or plug either into a different outlet. Do not install this product near maritime safety equipment or other critical navigation or communication equipment operating between 0.45-30 MHz. Not intended for use with emergency exit fixture or lights, electronic timers, photocells, or with dimmers

155
⚠ CAUTION
Risk of electric shock

- Do not use where directly exposed to water
- Do not open—no user serviceable parts inside

Lamp may shatter and cause injury if broken
• Remove and install by grasping only plastic portion of the lamp
This product complies with Part 18 of the FCC Rules, but may cause interference to radios, televisions, wireless telephones, and remote controls. Avoid placing this product near these devices. If interference occurs, move the product away from the device or plug either into a different outlet. Do not install this product near maritime safety equipment or other critical navigation or communication equipment operating between 0.45 - 30 MHz. Not intended for use with emergency exit fixtures or lights, electronic timers, photocells, in totally enclosed recessed fixtures, or with dimmers

156
⚠ CAUTION
Risk of electric shock

- Do not use where directly exposed to water
- Do not open—no user serviceable parts inside

Lamp may shatter and cause injury if broken
• Remove and install by grasping only plastic portion of the lamp
This product complies with Part 18 of the FCC Rules, but may cause interference to radios, televisions, wireless telephones, and remote controls. Avoid placing this product near these devices. If interference occurs, move the product away from the device or plug either into a different outlet. Do not install this product near maritime safety equipment or other critical navigation or communication equipment operating between 0.45-30 MHz. Not intended for use with emergency exit fixtures or lights, electronic timers, photocells, or in totally enclosed recessed fixtures.

157
⚠ CAUTION
Risk of electric shock

- Do not open—no user serviceable parts inside
- Do not use where directly exposed to water or outdoors without an enclosed fixture

This product complies with Part 18 of the FCC Rules, but may cause interference to radios, televisions, wireless telephones, and remote controls. Avoid placing this product near these devices. If interference occurs, move the product away from the device or plug either into a different outlet. Do not install this product near maritime safety equipment or other critical navigation or communication equipment operating between 0.45-30 MHz. Not intended for use with emergency exit fixtures or lights, electronic timers, photocells, or with dimmers.

158
⚠ CAUTION
Risk of electric shock

- Do not open—no user serviceable parts inside
- Do not use where directly exposed to water or outdoors without an enclosed fixture

This product complies with Part 18 of the FCC Rules, but may cause interference to radios, televisions, wireless telephones, and remote controls. Avoid placing this product near these devices. If interference occurs, move the product away from the device or plug either into a different outlet. Do not install this product near maritime safety equipment or other critical navigation or communication equipment operating between 0.45-30 MHz. Not intended for use with emergency exit fixtures or lights, electronic timers, photocells, dimmers, or in totally enclosed recessed fixtures.

160
⚠ CAUTION
Risk of electric shock

- Do not use where directly exposed to water
- Do not open—no user serviceable parts inside

Lamp may shatter and cause injury if broken
• Remove and install by grasping only plastic portion of the lamp
This product may cause interference to radio equipment operating in the frequency range of 2.2 - 2.8 MHz. Avoid placing this product near these devices. To reduce the possibility of radio interference to maritime safety communications, this device should not be installed:
1) On board cargo vessels of more than 300 tons
2) On board cargo vessels carrying more than 12 passengers for hire
3) At any medium frequency public coast station
Further, installation is not recommended on board vessels equipped with medium frequency, single sideband marine radios. If interference occurs, move this product away from the device or plug either into a different outlet. Such interference complaints should be reported to: Application Solutions at General Electric Company, 1975 Noble Road, Cleveland, Ohio 44112, or call toll free (800) 435-4448 from 8:00 am to 6:00 pm EST. Not intended for use with emergency exit fixtures or lights, electronic timers, photocells, dimmers, or in totally enclosed recessed fixtures.

163
⚠ CAUTION
Risk of electric shock

- Do not use where directly exposed to water
- Do not open—no user serviceable parts inside
- Use indoors only

Lamp may shatter and cause injury if broken
• Remove and install by grasping only plastic portion of the lamp
Added weight may cause instability of free-standing portable lamps. Use only with portable lamps in which the distance from the bottom of the base to the top of the lamp holder does not exceed three times the base width or with portable lamps which are provided with lamp shades. Not intended for use with emergency exit fixtures or lights, electronic timers, photocells, in totally enclosed recessed fixtures, or with dimmers.

Caution Notices (continued)

164
⚠ CAUTION
Risk of electric shock

- Do not use where directly exposed to water
- Do not open—no user serviceable parts inside
- Use indoors only

Lamp may shatter and cause injury if broken
• Remove and install by grasping only plastic portion of the lamp
This product complies with Part 18 of the FCC Rules, but may cause interference to radios, televisions, wireless telephones, and remote controls. Avoid placing this product near these devices. If interference occurs, move the product away from the device or plug either into a different outlet. Do not install this product near maritime safety equipment or other critical navigation or communication equipment operating between 0.45-30 MHz. Not intended for use with emergency exit fixtures or lights, in totally enclosed recessed fixtures, or with dimmers. Added weight may cause instability of free-standing portable lamps. Use only with portable lamps in which the distance from the bottom of the base to the top of the lamp holder does not exceed three times the base width. Use only with portable lamps which are provided with lamp shades.

165
⚠ CAUTION
Risk of electric shock

- Do not open—no user serviceable parts inside
- Do not use where directly exposed to water or outdoors without an enclosed fixture

This product complies with Part 18 of the FCC Rules, but may cause interference to radios, televisions, wireless telephones, and remote controls. Avoid placing this product near these devices. If interference occurs, move the product away from the device or plug either into a different outlet. Do not install this product near maritime safety equipment or other critical navigation or communication equipment operating between 0.45-30 MHz. Not intended for use with emergency exit fixtures or lights, electronic timers, photocells or in totally enclosed recessed fixtures.

166
⚠ CAUTION
Risk of electric shock

• Do not open—no user serviceable parts inside
This product complies with Part 18 of the FCC Rules, but may cause interference to radios, televisions, wireless telephones, and remote controls. Avoid placing this product near these devices. If interference occurs, move the product away from the device or plug either into a different outlet. Do not install this product near maritime safety equipment or other critical navigation or communication equipment operating between 0.45-30 MHz. Not intended for use with emergency exit fixtures or lights, electronic timers, photocells, or with dimmers.

勝特力材料 886-3-5753170
胜特力电子(上海) 86-21-34970699
胜特力电子(深圳) 86-755-83298787
Http://www. 100y. com. tw

Compact Fluorescent Lamps

Cross-Reference

GE Description	Generic Description	Osram/Sylvania Description	Philips Description
Order This GE Lamp	If you currently use these lamps		
Low Wattage Biax® 2-Pin			
F5BX/SPX27	CFT5W/G23/827	CF5DS/827	PL-S 5W/827
F5BX/SPX41	CFT5W/G23/841	CFDS/841	—
F7BX/SPX27	CFT7W/G23/827	CF7DS/827	PL-S 7W/827
F7BX/SPX35	CFT7W/G23/835	CF7DS/835	PL-S 7W/835
F7BX/SPX41	CFT7W/G23/841	CF7DS/841	PL-S 7W/841
F9BX/SPX27	CFT9W/G23/827	CF9DS/827	PL-S 9W/827
F9BX/SPX35	CFT9W/G23/835	CF9DS/835	PL-S 9W/835
F9BX/SPX41	CFT9W/G23/841	CF9DS/841	PL-S 9W/841
F13BX/SPX27	CFT13W/G23/827	CF13DS/827	PL-S 13W/827
F13BX/SPX30	CFT13W/G23/830	CF13DS/830	PL-S 13W/830
F13BX/SPX35	CFT13W/G23/835	CF13DS/835	PL-S 13W/835
F13BX/SPX41	CFT13W/G23/841	CF13DS/841	PL-S 13W/841
F13BX/SPX50	CFT13W/G23/850	CF13DS/850	PL-S 13W/850
F13BX/E/827	CFT13W/G23/827	—	—
F13BX/E/830	CFT13W/G23/835	—	—
F13BX/E/835	CFT13W/G23/830	—	—
F13BX/E/841	CFT13W/G23/841	—	—
F13BX/E/850	CFT13W/G23/850	—	—
High Lumen Biax®			
F18BX/SPX30	FT18W/2G11/830	FT18DL/830	PL-L 18W/830
F18BX/SPX35	FT18W/2G11/835	FT18DL/835	PL-L 18W/835
F18BX/SPX41	FT18W/2G11/841	FT18DL/841	PL-L 18W/841
F18BX/SPX30/RS	FT18W/2G11/RS/830	FT18DL/830/RS	PL-L 18W/830
F18BX/SPX35/RS	FT18W/2G11/RS/835	FT18DL/835/RS	PL-L 18W/835
F18BX/SPX41/RS	FT18W/2G11/RS/841	FT18DL/841/RS	PL-L 18W/841
F18BX/SPX65/RS	FT18W/2G11/RS/865	—	—
F27BX/SPX3/RS	FT24W/2G11/830	FT24DL/830	PL-L 24W/830
F27BX/SPX35/RS	FT24W/2G11/835	FT24DL/835	PL-L 24W/835
F27BX/SPX41/RS	FT24W/2G11/841	FT24DL/841	PL-L 24W/841
F39BX/SPX3/RS	FT36W/2G11/830	FT36DL/830	PL-L 36W/830
F39BX/SPX3/RS	FT36W/2G11/835	FT36DL/835	PL-L 36W/835
F39BX/SPX3/RS	FT36W/2G11/841	FT36DL/841	PL-L 36W/841
F40/30BX/SPX30	FT40W/2G11/RS/830	FT40DL/830/RS	PL-L 40W/830/RS/IS
F40/30BX/SPX35	FT40W/2G11/RS/835	FT40DL/835/RS	PL-L 40W/835/RS/IS
F40/30BX/SPX41	FT40W/2G11/RS/841	FT40DL/841/RS	PL-L 40W/841/RS/IS
F40/30BX/SPX50/RS	F40/30BX/SPX50/RS	—	—
F50/30BX/SPX30/RS	FT50W/2G11/RS/830	—	PL-L 50W/830/RS
F50/30BX/SPX35/RS	FT50W/2G11/RS/835	—	PL-L 50W/835/RS
F50/30BX/SPX41/RS	FT50W/2G11/RS/841	—	PL-L 50W/841/RS
F55BX/830	FT55W/2G11/RS/830	FT55DL/830	—
F55BX/835	FT55W/2G11/RS/835	FT55DL/835	—
F55BX/841	FT55W/2G11/RS/841	FT55DL/841	—
Double Biax® 2-Pin			
F9DBX23T4/SPX27	CFQ9W/G23/827	CF9DD/827	—
F9DBX23T4/841	CFQ9W/G23/841	—	—
F13DBX23T4/SPX27	CFQ13W/GX23/827	CF13DD/827	PL-C 13W/827/USA
F13DBX23T4/SPX30	CFQ13W/GX23/830	CF13DD/830	PL-C 13W/830/USA
F13DBX23T4/SPX35	CFQ13W/GX23/835	CF13DD/835	PL-C 13W/835/USA
F13DBX23T4/SPX41	CFQ13W/GX23/841	CF13DD/841	PL-C 13W/841/USA
F13DBXT4/SPX27	CFQ13W/G24d/827	—	PL-C 13W/827
F13DBXT4/SPX30	CFQ13W/G24d/830	—	PL-C 13W/830
F13DBXT4/SPX35	CFQ13W/G24d/835	—	—
F13DBXT4/SPX41	CFQ13W/G24d/841	—	—
F18DBXT4/SPX27	CFQ18W/G24d/827	CF18DD/827	PL-C 18W/827
F18DBXT4/SPX30	CFQ18W/G24d/830	CF18DD/830	PL-C 18W/830
F18DBXT4/SPX35	CFQ18W/G24d/835	CF18DD/835	PL-C 18W/835
F18DBXT4/SPX41	CFQ18W/G24d/841	CF18DD/841	PL-C 18W/841
F26DBXT4/SPX27	CFQ26W/G24d/827	CF26DD/827	PL-C 26W/827
F26DBXT4/SPX30	CFQ26W/G24d/830	CF26DD/830	PL-C 26W/830
F26DBXT4/SPX35	CFQ26W/G24d/835	CF26DD/835	PL-C 26W/835
F26DBXT4/SPX41	CFQ26W/G24d/841	CF26DD/841	PL-C 26W/841
F26DBX/E/827	CFQ26W/G24d/827	—	—

GE Description	Generic Description	Osram/Sylvania Description	Philips Description
Order This GE Lamp	If you currently use these lamps		
Double Biax® 2-Pin (continued)			
F26DBX/E/830	CFQ26W/G24d/830	—	—
F26DBX/E/835	CFQ26W/G24d/835	—	—
F26DBX/E/841	CFQ26W/G24d/841	—	—
Double Biax® 4-Pin			
F13DBX/SPX27/4P	CFQ13W/G24q/827	CF13DD/E/827	PL-C 13W/827/4P
F13DBX/SPX30/4P	CFQ13W/G24q/830	CF13DD/E/830	PL-C 13W/830/4P
F13DBX/SPX35/4P	CFQ13W/G24q/835	CF13DD/E/835	PL-C 13W/835/4P
F13DBX/SPX41/4P	CFQ13W/G24q/841	CF13DD/E/841	PL-C 13W/841/4P
F18DBX/SPX27/4P	CFQ18W/G24q/827	CF18DD/E/827	PL-C 18W/827/4P
F18DBX/SPX30/4P	CFQ18W/G24q/830	CF18DD/E/830	PL-C 18W/830/4P
F18DBX/SPX35/4P	CFQ18W/G24q/835	CF18DD/E/835	PL-C 18W/835/4P
F18DBX/SPX41/4P	CFQ18W/G24q/841	CF18DD/E/841	PL-C 18W/841/4P
F26DBX/SPX27/4P	CFQ26W/G24q/827	CF26DD/E/827	PL-C 26W/827/4P
F26DBX/SPX30/4P	CFQ26W/G24q/830	CF26DD/E/830	PL-C 26W/830/4P
F26DBX/SPX35/4P	CFQ26W/G24q/835	CF26DD/E/835	PL-C 26W/835/4P
F26DBX/SPX41/4P	CFQ26W/G24q/841	CF26DD/E/841	PL-C 26W/841/4P
Triple Biax® 4-Pin			
F13TBX/SPX27/1A/4P	CFTR13W/GX24q/827	CF13DT/E/827	—
F13TBX/SPX27/1A/4P	CFTR13W/GX24q/830	CF13DT/E/830	—
F13TBX/SPX27/1A/4P	CFTR13W/GX24q/835	CF13DT/E/835	—
F13TBX/SPX27/1A/4P	CFTR13W/GX24q/841	CF13DT/E/841	—
F18TBX/SPX27/1A/4P	CFTR18W/GX24q/827	CF18DT/E/IN/827	PL-T 18W/827/4P
F18TBX/SPX30/1A/4P	CFTR18W/GX24q/830	CF18DT/E/IN/830	PL-T 18W/830/4P
F18TBX/SPX35/1A/4P	CFTR18W/GX24q/835	CF18DT/E/IN/835	PL-T 18W/835/4P
F18TBX/SPX41/1A/4P	CFTR18W/GX24q/841	CF18DT/E/IN/841	PL-T 18W/841/4P
F26TBX/SPX27/1A/4P	CFTR26W/GX24q/827	CF26DT/E/IN/827	PL-T 26W/827/4P
F26TBX/SPX30/1A/4P	CFTR26W/GX24q/830	CF26DT/E/IN/830	PL-T 26W/830/4P
F26TBX/SPX35/1A/4P	CFTR26W/GX24q/835	CF26DT/E/IN/835	PL-T 26W/835/4P
F26TBX/SPX41/1A/4P	CFTR26W/GX24q/841	CF26DT/E/IN/841	PL-T 26W/841/4P
F32TBX/SPX27/1A/4P	CFTR32W/GX24q/827	CF32DT/E/IN/827	PL-T 32W/827/4P
F32TBX/SPX30/1A/4P	CFTR32W/GX24q/830	CF32DT/E/IN/830	PL-T 32W/830/4P
F32TBX/SPX35/1A/4P	CFTR32W/GX24q/835	CF32DT/E/IN/835	PL-T 32W/835/4P
F32TBX/SPX41/1A/4P	CFTR32W/GX24q/841	CF32DT/E/IN/841	PL-T 32W/841/4P
F42TBX/827/1A/4P/EOL	CFTR42W/GX24q/827	CF42DT/E/IN/827	PL-T 42W/827/4P
F42TBX/830/1A/4P/EOL	CFTR42W/GX24q/830	CF42DT/E/IN/830	PL-T 42W/830/4P
F42TBX/835/1A/4P/EOL	CFTR42W/GX24q/835	CF42DT/E/IN/835	PL-T 42W/835/4P
F42TBX/841/1A/4P/EOL	CFTR42W/GX24q/841	CF42DT/E/IN/841	PL-T 42W/841/4P
High Output Biax® 4-Pin			
F57QBX/827/1A/4P/EOL	CFM57W/GX24q/827	CF57DT/E/IN/827	—
F57QBX/830/1A/4P/EOL	CFM57W/GX24q/830	CF57DT/E/IN/830	—
F57QBX/835/1A/4P/EOL	CFM57W/GX24q/835	CF57DT/E/IN/835	—
F57QBX/841/1A/4P/EOL	CFM57W/GX24q/841	CF57DT/E/IN/841	—
F57QBX/850/1A/4P/EOL	CFM57W/GX24q/850	CF57DT/E/IN/850	—
F70QBX/827/1A/4P/EOL	CFM70W/GX24q/827	—	—
F70QBX/830/1A/4P/EOL	CFM70W/GX24q/830	—	—
F70QBX/835/1A/4P/EOL	CFM70W/GX24q/835	—	—
F70QBX/841/1A/4P/EOL	CFM70W/GX24q/841	—	—
F70QBX/850/1A/4P/EOL	CFM70W/GX24q/850	—	—

勝 特 力 材 料 886-3-5753170
胜特力电子(上海) 86-21-34970699
胜特力电子(深圳) 86-755-83298787
Http://www.100y.com.tw

GE Enhanced Plug-in Product Conversion

PC	PC Description	New PC	New Description
If you used to order GE product:		Now order GE product:	
37654	F5BX/SPX27/827	97551	F5BX/827/ECO
13575	F5BX/SPX27/CD	97552	F5BX/827/CDECO
37661	F5BX/SPX41/840	97553	F5BX/841/ECO
37846	F7BX/SPX27/827	97554	F7BX/827/ECO
13576	F7BX/SPX27/CD	97555	F7BX/827/CDECO
37659	F7BX/SPX35/835	97556	F7BX/835/ECO
37660	F7BX/SPX41/840	97557	F7BX/841/ECO
37651	F9BX/SPX27/827	97558	F9BX/827/ECO
13577	F9BX/SPX27/CD	97559	F9BX/827/CDECO
37652	F9BX/SPX35/835	97560	F9BX/835/ECO
37653	F9BX/SPX41/840	97561	F9BX/841/ECO
41645	F13BX/E/827	97562	F13BX/E/827/ECO
41646	F13BX/E/830	97563	F13BX/E/830/ECO
41649	F13BX/E/835	97564	F13BX/E/835/ECO
41651	F13BX/E/841	97565	F13BX/E/841/ECO
41652	F13BX/E850	97566	F13BX/E/850/ECO
14583	F13BX/SPX27/CD	97567	F13BX/827/CDECO
41757	F13BX/SPX35 100P	97568	F13BX/835 100P
17048	F13BX/SPX35/835	97569	F13BX/835/ECO
41758	F13BX/SPX41 100P	97570	F13BX/841 100P
20434	F13BX/SPX41/840	97571	F13BX/841/ECO
11671	F13BX/SPX50	97572	F13BX/850/ECO
14650	F13BXSPX27/827	97573	F13BX/827/ECO
17612	F13BXSPX30/830	97574	F13BX/830/ECO
42065	F9DBX23T4/841	97575	F9DBX23/841/ECO
12409	F9DBX23T4SPX27/8	97576	F9DBX23/827/ECO
13578	F13DBX/SPX27/CD	97585	F13DBX/827/CD
18844	F13DBX23T4/SPX27	97586	F13DBX23/827/ECO
10574	F13DBX23T4/SPX30	97587	F13DBX23/830/ECO
18556	F13DBX23T4/SPX35	97588	F13DBX23/835/ECO
20531	F13DBX23T4/SPX41	97589	F13DBX23/841/ECO
18557	F13DBXT4/SPX27	97590	F13DBX/827/ECO
12956	F13DBXT4/SPX30	97591	F13DBX/830/ECO
18559	F13DBXT4/SPX35	97592	F13DBX/835/ECO
20532	F13DBXT4/SPX41	97593	F13DBX/841/ECO
30035	F13DBX/SPX27/4P	97594	F13DBX/827/ECO4P
10580	F13DBX/SPX30/4P	97595	F13DBX/830/ECO4P
30037	F13DBX/SPX35/4P	97596	F13DBX/835/ECO4P
30038	F13DBX/SPX41/4P	97597	F13DBX/841/ECO4P
12860	F18DBXT4/SPX27	97577	F18DBX/827/ECO
12861	F18DBXT4/SPX30	97578	F18DBX/830/ECO
12863	F18DBXT4/SPX35	97579	F18DBX/835/ECO
12864	F18DBXT4/SPX41	97580	F18DBX/841/ECO
12865	F18DBX/SPX27/4P	97598	F18DBX/827/ECO4P
12866	F18DBX/SPX30/4P	97599	F18DBX/830/ECO4P
12869	F18DBX/SPX35/4P	97600	F18DBX/835/ECO4P
12870	F18DBX/SPX41/4P	97601	F18DBX/841/ECO4P
46290	F26DBX/E/827	97602	F26DBX/E/827/ECO
46291	F26DBX/E/830	97603	F26DBX/E/830/ECO
46292	F26DBX/E/835	97604	F26DBX/E/835/ECO
46294	F26DBX/E/841	97605	F26DBX/E/841/ECO
35250	F26DBXT4/SPX27	97606	F26DBX/827/ECO
35237	F26DBXT4/SPX30	97607	F26DBX/830/ECO
35251	F26DBXT4/SPX35	97608	F26DBX/835/ECO
35252	F26DBXT4/SPX41	97609	F26DBX/841/ECO
35247	F26DBXT4SPX27/4P	97610	F26DBX/827/ECO4P
35235	F26DBXT4SPX30/4P	97611	F26DBX/830/ECO4P
35248	F26DBXT4SPX35/4P	97612	F26DBX/835/ECO4P
35236	F26DBXT4SPX41/4P	97613	F26DBX/841/ECO4P
34391	F13TBX/SPX27/1A/4	97619	F13TBX/827/A/ECO
34395	F13TBX/SPX30/A/4	97620	F13TBX/830/A/ECO
34400	F13TBX/SPX35/A/4	97621	F13TBX/835/A/ECO
34387	F13TBX/SPX41/A/4	97622	F13TBX/841/A/ECO

PC	PC Description	New PC	New Description
If you used to order GE product:		Now order GE product:	
47696	F13TBX827/4P/EOL	97623	F13TBX827/4P/ECO
34392	F18TBX/SPX27/A/4	97624	F18TBX/827/A/ECO
34396	F18TBX/SPX30/A/4	97625	F18TBX/830/A/ECO
34405	F18TBX/SPX35/A/4	97626	F18TBX/835/A/ECO
34385	F18TBX/SPX41/A/4	97627	F18TBX/841/A/ECO
48869	F18TBX827/4P/EOL	97628	F18TBX827/4P/ECO
34393	F26TBX/SPX27/A/4	97614	F26TBX/827/A/ECO
34397	F26TBX/SPX30/A/4	97615	F26TBX/830/A/ECO
34406	F26TBX/SPX35/A/4	97616	F26TBX/835/A/ECO
34381	F26TBX/SPX41/A/4	97617	F26TBX/841/A/ECO
48870	F26TBX827/4P/EOL	97618	F26TBX827/4P/ECO
39377	F32TBX/SPX27A/4P	97629	F32TBX/827/A/ECO
39378	F32TBX/SPX30A/4P	97630	F32TBX/830/A/ECO
39379	F32TBX/SPX35A/4P	97631	F32TBX/835/A/ECO
39380	F32TBX/SPX41A/4P	97632	F32TBX/841/A/ECO
46312	F42TBX827A4P/EOL	97633	F42TBX/827/A/ECO
46313	F42TBX830A4P/EOL	97634	F42TBX/830/A/ECO
46314	F42TBX835A4P/EOL	97635	F42TBX/835/A/ECO
46315	F42TBX841A4P/EOL	97636	F42TBX/841/A/ECO
48861	F57QBX/827/A/4P/EOL	48861	F57QBX/827/A/ECO
48862	F57QBX/830/A/4P/EOL	48862	F57QBX/830/A/ECO
48863	F57QBX/835/A/4P/EOL	48863	F57QBX/835/A/ECO
48864	F57QBX/841/A/4P/EOL	48864	F57QBX/841/A/ECO
93404	F57QBX/850/A/4P/EOL	93404	F57QBX/850/A/ECO
48865	F70QBX/827/A/4P/EOL	48865	F70QBX/827/A/ECO
48866	F70QBX/830/A/4P/EOL	48866	F70QBX/830/A/ECO
48867	F70QBX/835/A/4P/EOL	48867	F70QBX/835/A/ECO
48868	F70QBX/841/A/4P/EOL	48868	F70QBX/841/A/ECO
93406	F70QBX/850/A/4P/EOL	93406	F70QBX/850/A/ECO