




勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)


Halogen Lamps

ITEM	Volts (V)	Watts (W)	Dimens (cxb) mm (mm)	Light Centre Length(a) (mm)	Luminous Flux (lm)	Life Hours (h)
Color Temperature:2900K Base:E11/E12/E14 /BA15d /GY6.35 /G9						
JD110-130V 35W	110/130	35	12.5 X 45	33	420	2000
JD110-130V 50W	110/130	50	12.5 X 45	33	600	2000
JD110-130V 75W	110/130	75	11.5 X 75	49	900	2000
JD110-130V 100W	110/130	100	11.5 X 75	49	1200	2000
JD110-130V 150W	110/130	150	14 X 75	49	2100	2000
JD110-130V 200W	110/130	200	14 X 81	56	3000	2000
JD110-130V 250W	110/130	250	14 X 81	61	4500	2000
JD110-130V 300W	110/130	300	14 X 81	49	5100	2000
JD110-130V 500W	110/130	500	14 X 85	68	8500	2000
JD220-240V 35W	220/240	35	12.5 X 45	33	400	2000
JD220-240V 50W	220/240	50	12.5 X 45	33	550	2000
JD220-240V 60W	220/240	60	12.5 X 45	33	720	2000
JD220-240V 75W	220/240	75	11.5 X 75	56	900	2000
JD220-240V 100W	220/240	100	14 X 81	56	1200	2000
JD220-240V 150W	220/240	150	14 X 81	56	2100	2000
JD220-240V 200W	220/240	200	14 X 81	61	3000	2000
JD220-240V 250W	220/240	250	14 X 81	61	4500	2000
JD220-240V 300W	220/240	300	14 X 81	61	5100	2000
JD220-240V 500W	220/240	500	14 X 95	68	8500	2000
JD220-240V 750W	220/240	750	14 X 105	75	13500	2000
JCD110-130V 35W	110/130	35	12.5 X 48	28	420	2000
JCD110-130V 50W	110/130	50	12.5 X 48	30	600	2000
JCD110-130V 75W	110/130	75	14.5 X 58	35	900	2000
JCD110-130V 100W	110/130	100	14.5 X 60	38	1200	2000
JCD110-130V 150W	110/130	150	14.5 X 62	40	2100	2000
JCD220-240V 35W	220/240	35	12.5 X 48	28	400	2000
JCD220-240V 50W	220/240	50	12.5 X 48	30	550	2000
JCD220-240V 60W	220/240	60	14.5 X 52	35	720	2000
JCD220-240V 75W	220/240	75	14.5 X 58	36	900	2000
JCD220-240V 100W	220/240	100	14.5 X 60	38	1200	2000
JCD220-240V 350W	220/240	350	14.5 X 60	40	5000	2000
G9 110-130V 25W	110/130	25	13 X 48	35	270	2000
G9 110-130V 40W	110/130	40	13 X 48	35	550	2000
G9 110-130V 60W	110/130	60	13 X 48	35	720	2000
G9 220-240V 25W	220/240	25	13 X 48	35	200	2000
G9 220-240V 40W	220/240	40	13 X 48	35	360	2000
G9 220-240V 60W	220/240	60	13 X 48	35	600	2000


JD
 BASE: E11, E14, BA15d



JCD
 BASE: GY6.35



JCD
 BASE: G9



Halogen Lamps

KLight®

勝特力材料 886-3-5753170

勝特力电子(上海) 86-21-54151736



勝特力电子(深圳) 86-755-83298787

[Http://www.100y.com.tw](http://www.100y.com.tw)

BASE: G4/G6.35/BA9S/
GY6.35/BA15

ITEM	Volts (V)	Watts (W)	Dimens (cxb) mmxmm	Light Centre Length (a)mm	Luminous Flux Lm	Life Hours (h)
Color Temperature:2800K						
JC6V 5W	6	5	8 X 30	20	60	2000
JC6V 10W	6	10	8 X 30	20	130	
JC6V 15W	6	15	8 X 30	20	225	
JC6V 20W	6	20	8 X 30	20	350	
JC6V 30W	6	30	8 X 30	20	560	
JC6V 35W	6	35	11 X 40	30	650	
JC6V 50W	6	50	11 X 40	30	950	
JC12V 3W	12	3	8 X 30	20	30	2000
JC12V 5W	12	5	8 X 30	20	60	
JC12V 10W	12	10	8 X 30	20	130	
JC12V 20W	12	20	8 X 30	20	350	
JC12V 30W	12	30	8 X 30	20	560	
JC12V 35W	12	35	11 X 40	30	650	
JC12V 50W	12	50	11 X 40	30	950	
JC12V 75W	12	75	11 X 40	30	1325	
JC12V 100W	12	100	11.5 X 44	30	2000	2000
JC24V 10W	24	10	8 X 30	20	130	
JC24V 20W	24	20	8 X 30	20	350	
JC24V 35W	24	35	10 X 40	30	650	
JC24V 50W	24	50	10 X 40	30	950	
JC24V 75W	24	75	10 X 40	30	1325	
JC24V 100W	24	100	11.5 X 44	30	2000	
JC24V 150W	24	150	13.5 X 44	30	2700	
JC24V 250W	24	250	15 X 58	30	4500	
High Color Temperature:3200K						
JC6V 10W	6	10	8 X 30	20	180	100
JC6V 15W	6	15	8 X 30	20	300	
JC6V 20W	6	20	8 X 30	20	400	
JC6V 30W	6	30	8 X 30	20	750	
JC12V 10W	12	10	8 X 30	20	180	
JC12V 20W	12	20	8 X 30	20	400	
JC12V 30W	12	30	10 X 40	30	750	
JC12V 50W	12	50	10 X 40	30	1200	
JC12V 75W	12	75	10 X 40	30	1800	
JC12V 100W	12	100	11.5 X 44	30	2400	

JC TYPE

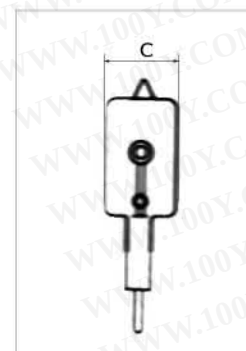




勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Halogen Lamps

ITEM	Volts (V)	Watts (W)	Dimens (cxb) mm (mm)	Luminous Flux (lm)	Life Hours (h)	
J110-130V 100W	110/130	100	8 X 78	1400	2000	
J110-130V 150W	110/130	150	8 X 78	2400	2000	
J110-130V 200W	110/130	200	8 X 78	3200	2000	
J110-130V 250W	110/130	250	10 X 78	4000	2000	
J110-130V 150W	110/130	150	8 X 118	2400	2000	
J110-130V 200W	110/130	200	8 X 118	3200	2000	
J110-130V 250W	110/130	250	8 X 118	4000	2000	
J110-130V 300W	110/130	300	8 X 118	5400	2000	
J110-130V 500W	110/130	500	10 X 118	10000	2000	
J110-130V 750W	110/130	750	10 X 189	15500	2000	
J110-130V 1000W	110/130	1000	10 X 189	22000	2000	
J110-130V 1500W	110/130	1500	10 X 254	33500	2000	
J220-240V 75W	220/240	75	8 X 78	1000	2000	CE
J220-240V 100W	220/240	100	8 X 78	1400	2000	CE
J220-240V 150W	220/240	150	8 X 78	2400	2000	CE
J220-240V 200W	220/240	200	8 X 78	3200	2000	CE
J220-240V 250W	220/240	250	10 X 78	4000	1500	CE
J220-240V 150W	220/240	150	8 X 118	2200	2000	
J220-240V 200W	220/240	200	8 X 118	3200	2000	
J220-240V 250W	220/240	250	8 X 118	4000	2000	
J220-240V 300W	220/240	300	8 X 118	5000	2000	CE
J220-240V 350W	220/240	350	10 X 118	6000	2000	
J220-240V 500W	220/240	500	10 X 118	9500	2000	CE
J220-240V 750W	220/240	750	10 X 189	15000	2000	
J220-240V 1000W	220/240	1000	10 X 189	21000	2000	
J220-240V 1000W	220/240	1000	10 X 254	21000	2000	
J220-240V 1500W	220/240	1500	10 X 254	33000	2000	
J220-240V 2000W	220/240	2000	10 X 333	44000	2000	

J TYPE

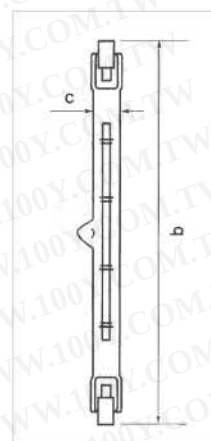

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

KLight®

Halogen Lamps

ITEM	Volts (V)	Watts (W)	Axis cd (cd)	Beam Angle (°)	Color Temp. (°K)	Life Hours (h)
MR-16/BASE:GX5.3						
ESX	12	20	3350	12°	2900	2000
BBF	12	20	1000	24°	2900	
BAB	12	20	460	36°	2900	
FMT	12	35	6300	12°	2900	
FMV	12	35	1900	22°	2900	
FMW	12	35	730	36°	2900	
EXT	12	50	9500	13°	2900	
EXZ	12	50	2500	24°	2900	
EXN	12	50	1500	38°	2900	
FNV	12	50	1000	60°	2900	
EYF	12	75	11500	13°	2900	
EYJ	12	75	4200	24°	2900	
EYC	12	75	2200	38°	2900	


MR-11/BASE:GZ4						
FTB	12	20	3000	10°	2900	2000
FTC	12	20	1300	20°	2900	
FTD	12	20	600	30°	2900	
FTE	12	35	4800	10°	2900	
FTF	12	35	2500	20°	2900	
FTH	12	35	1200	30°	2900	

ITEM	Volts (V)	Watts (W)	Beam Angle (°)	Color Temp. (°K)	Base	Life Hours (h)
MR-8	6	10	10/Narrow	2950	GZ4	1500
MR-8	12	20	10/Narrow	3050	GZ4	1500
MR-8	12	20	24/Wide	3050	GZ4	1500
MR-8	12	35	10/Narrow	3050	GZ4	1500
MR-8	12	35	24/Wide	3050	GZ4	1500

MR-16
BASE:GX5.3



MR-11
BASE:GZ4



MR-8
BASE:GZ4



Halogen Lamps

KLight®

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)



ITEM	Volts (V)	Watts (W)	Axis cd (cd)	Beam Angle (°)	Color Temp. (°K)	Life Hours (Hr)
JDR BASE : E14, E17, E26, E27, B22						
JDR35	110-130	35	600	40	2800	2000
JDR50	Or	50	1000	40	2800	2000
JDR75	220-240	75	1500	40	2800	2000
JCDR BASE: GX5.3, G8.0						
JCDR35	110-130 Or	35	600	40	2800	2000
JCDR50	220-240	50	1000	40	2800	2000
MR16 BASE : GU10						
MR16-GU10	110-130 Or	35	600	40	2800	2000
MR16-GU10	220-240	50	1000	40	2800	2000
MR11 BASE: GU10						
MR11-GU10	110-130 Or	20	300	30	2650	2000
MR11-GU10	220-240	35	600	30	2750	2000


JDR




JCDR
BASE:
GX5.3
G8.0



MR16
BASE:
GU10



MR11
BASE:
GU10



Halogen Lamps



勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

ITEM	Volts (V)	Watts (W)	(Beam Angle Max Luminous Intensity (cd) Spot/N. Flood/M. Flood)	Average Lamp Life (Hous)
50PAR16/E26 (E14, E17)	110-130	50	(30°) 1200	2500
50PAR20/E26	110-130	50	(9° /23°) 4000/1500	2500
50PAR30/E26	110-130	50	(8° /23° 35°) 4500/1500/1100	2500
75PAR30/E26	110-130	75	10000/3000/2000	2500
50PAR30L/E26	110-130	50	(8° /23° 35°) 4500/1500/1100	2500
75PAR30L/E26	110-130	75	10000/3000/2000	2500
90PAR30L/E26	110-130	90	14500/4200/2500	2500
45PAR38/E26	110-130	45	(8° /23° 35°) 4000/1300/1000	2500
75PAR38/E26	110-130	75	10000/3000/2000	2500
90PAR38/E26	110-130	90	14500/4200/2500	2500



PAR16



PAR20



PAR30



PAR30L



PAR38

ITEM	Volts (V)	Watts (W)	(Beam Angle Max Luminous Intensity (cd) Spot/N. Flood/M. Flood)	Average Lamp Life (Hous)
50PAR16/E27	220/240	50	(30°) 960	2000
50PAR20/E27	220/240	50	(12° / 30°) 3500/960	2000
50PAR30/E27	220/240	50	(8° /23°/ 30°) 4100/1300/960,7000/5600/2000	2000
75PAR30/E27	220/240	75	(8° /23°/ 30°) 4100/1300/960	2000
50PAR30L/E27	220/240	50	(8° /23°/ 30°) 10000/2600/2000/12500/3600/2500	2000
75PAR30L/E27	220/240	75	(8° /23°/ 30°) 10000/2600/2000	2000
90PAR30L/E27	220/240	90	(8° /23°/ 30°) 13000/3700/2500	2000
45PAR38/E27	220/240	45	(8° /23°/ 30°) 10000/2600/2000	2000
75PAR38/E27	220/240	75	(8° /23°/ 30°) 10000/2600/2000	2000
90PAR38/E27	220/240	90	(8° /23°/ 30°) 13000/3700/2500	2000

Halogen Lamps


KLight®

勝特力材料 886-3-5753170

勝特力电子(上海) 86-21-54151736

勝特力电子(深圳) 86-755-83298787

[Http://www.100y.com.tw](http://www.100y.com.tw)

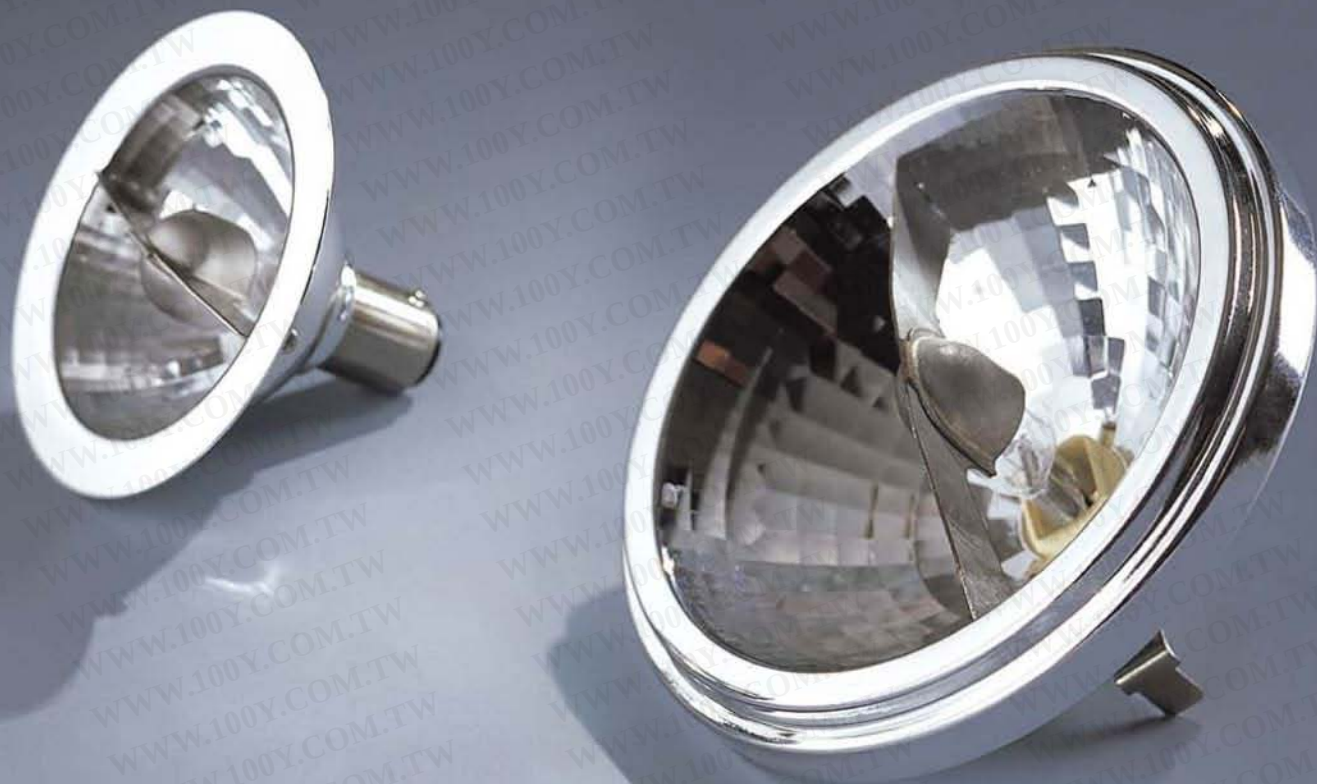

ITEM	Volts (V)	Watts (W)	Cd	Beam Angle (°)	Color Temp. (°K)	Life Hours (Hr)
KR70	12	50	28000	8	2850	3000
KR70	12	50	3000	24	2850	3000
KR111	12	50	28000	8	2850	3000
KR111	12	50	3000	24	2850	3000

Halogen Lamps



勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

ITEM	Volts (V)	Watts (W)	Cd	Beam Angle (°)	Color Temp. (°K)	Life Hours (Hr)
KS111	110-130	50	4000	10	2850	2000
KS111	110-130	50	1500	24	2850	2000
KS111	110-130	50	1000	38	2850	2000
KS111	110-130	75	9500	10	2850	2000
KS111	110-130	75	3000	24	2850	2000
KS111	110-130	75	2000	38	2850	2000
KS111	110-130	100	14000	10	2850	2000
KS111	110-130	100	4000	24	2850	2000
KS111	110-130	100	2500	38	2850	2000
KS111	220-240	50	4000	10	2850	2000
KS111	220-240	50	1500	24	2850	2000
KS111	220-240	50	1000	38	2850	2000
KS111	220-240	75	9500	10	2850	2000
KS111	220-240	75	3000	24	2850	2000
KS111	220-240	75	2000	38	2850	2000
KS111	220-240	100	14000	10	2850	2000
KS111	220-240	100	4000	24	2850	2000
KS111	220-240	100	2500	38	2850	2000