

DECOSTAR 35

Halogen dichroic reflector lamps with 35 mm diameter

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)



Areas of application

- General illumination
- Workplace lighting
- Kitchen lighting
- Mirror lighting
- Object lighting
- Shops
- Restaurants, hotels and similar prestigious applications

Product benefits

- Brilliant accent light
- Dichroic reflector reduces the heat in the light beam by up to 66 %
- Approved for use in open luminaires (to IEC 60598-1)
- UV filter
- Contains no mercury

Product features

- Average life: 2,000 h
- 100 % dimmable
- Color rendering index R_a : 100
- Diameter: 35 mm
- Deco cover





Product family datasheet

Technical data

Product description	Electrical data		Photometrical data	Light technical data		
	Nominal wattage	Nominal voltage	Rated color temperature	Beam angle	Nominal beam angle	Starting time
DECOSTAR 35 10 W 12 V 36° GU4	10,00 W	12 V	2800 K	36 °	36 °	0,0 s
DECOSTAR 35 20 W 12 V 36° GU4	20,00 W	12 V	2800 K	36 °	36 °	0,0 s
DECOSTAR 35 35 W 12 V 36° GU4	35,00 W	12 V	2900 K	36 °	36 °	0,0 s

Product description	Warm-up time (60 %)	Rated beam angle (half peak value)	Dimensions & weight	Lifespan	Additional product data	
			Overall length	Rated lamp life time	Number of switching cycles	Base (standard designation)
DECOSTAR 35 10 W 12 V 36° GU4	0,00 s	36,00 °	42,0 mm	4000 h	100000	GU4
DECOSTAR 35 20 W 12 V 36° GU4	0,00 s	36,00 °	42,0 mm	4000 h	100000	GU4
DECOSTAR 35 35 W 12 V 36° GU4	0,00 s	36,00 °	42,0 mm	4000 h	100000	GU4

Product description	Capabilities	Certificates & standards		Country specific categorizations
	Dimmable	Energy efficiency class	Energy consumption	ILCOS
DECOSTAR 35 10 W 12 V 36° GU4	Si	C	11 kWh/1000h	HRGS//UB-10-12-GU4-35/36
DECOSTAR 35 20 W 12 V 36° GU4	Yes	C	22 kWh/1000h	HRGS//UB-20-12-GU4-35/36
DECOSTAR 35 35 W 12 V 36° GU4	Si	C	38 kWh/1000h	HRGS//UB-35-12-GU4-35/36

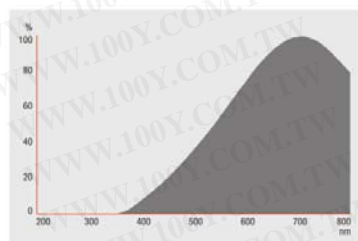

Product family datasheet

DECOSTAR 35 10 W 12 V 36° GU4,
DECOSTAR 35 20 W 12 V 36° GU4,
DECOSTAR 35 35 W 12 V 36° GU4

DECOSTAR 35 10 W 12 V 36° GU4,
DECOSTAR 35 20 W 12 V 36° GU4,
DECOSTAR 35 35 W 12 V 36° GU4

Application advice

For more detailed application information and graphics please see product datasheet.

Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4050300443935	DECOSTAR 35 10 W 12 V 36° GU4	Shipping carton box 10	178 mm x - x -	0.88 dm ³	227.40 g
4050300346168	DECOSTAR 35 20 W 12 V 36° GU4	Shipping carton box 10	178 mm x - x -	0.88 dm ³	231.00 g

Product family datasheet

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4050300940472	DECOSTAR 35 20 W 12 V 36° GU4	Shipping carton box 10	178 mm x - x -	0.84 dm ³	233.00 g
4050300346229	DECOSTAR 35 35 W 12 V 36° GU4	Shipping carton box 10	178 mm x - x -	0.84 dm ³	215.73 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

References / Links

For light distribution curves see

▶ www.osram.com

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.