

## SPECIFICATIONS

Type	Voltage (V)	Wattage (W)	Lumens (Lm)	Colour Temperature (°K)	Bulb Dia. (Dmm) Max.	Length (Lmm)	Ave. Life (Hrs.)	Base	Fig.
J	100~120V	200	3600	2900	9.4	114.2	1500	R7S	1
		250	4000	2900	9.4	114.2	2000	R7S	1
		300	5950	2950	9.4	114.2	2000	R7S	1
		500	11000	3000	12	114.2	2000	R7S	1
		750	15000	3000	12	185.7	2000	R7S	1
		1000	22000	3000	12	185.7	2000	R7S	1
		1500	33000	3000	12	250.7	2000	R7S	1
	200~250V	200	3200	2900	9.4	114.2	1000	R7S	1
		250	3750	2900	9.4	114.2	1500	R7S	1
		300	4800	2900	9.4	114.2	2000	R7S	1
		500	9500	3000	12	114.2	2000	R7S	1
		750	16500	3000	12	185.7	2000	R7S	1
		1000	22000	3000	12	185.7	2000	R7S	1
		1500	33000	3000	12	250.7	2000	R7S	1
		2000	44000	3000	12	327.4	2000	R7S	1
		2000	44000	3000	12	334.4	2000	Fa4	2

NOTE : Finish = Clear or Frosted available

Other specifications are acceptable.

## APPLICATIONS

Outdoor Floodlighting: Building floodlighting, roads, show windows, sign-boards, advertising towers, stadiums, shunting yards, wharves, airports, etc.  
High Bay Indoor Lighting: General high bay factory and gymnasium lighting.

## for use of $\Sigma$ Tungsten-Halogen Lamps

Please note that the lamps are made of quartz glass and should not be handled with bare hands as it will cause deterioration of the lamp performance. Should the lamps be started, clean them with a cloth soaked with alcohol and dry them thoroughly before burning.

The lamps are prissurized, so should be provided with some means to protect people or the surroundings in case of shattering.

Temperature limitation at the pinched seal end is 350°C max. Excess of the limit may lead to premature lamp failure. Bulb wall temperature must be kept above 250°C to maintain the regenerative halogen cycle.

Burning position of the lamp is to be set within 4 deg. of the horizontal.

Fig. 1


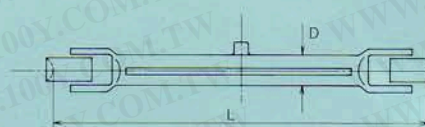


Fig. 2

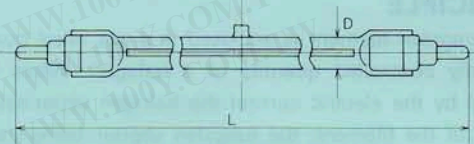

Note : L = Contact to Contact

## $\Sigma$ SIGMA CORPORATION

Factory : 1554 Mikage, Toyotomi-cho  
Himeji 679-21, JAPAN  
Telephone : 0792-64-5421  
Fax : 0792-64-5439

Office : 1-1-9 Sakaemachi-Dori  
Chuo-ku, Kobe 650, JAPAN  
Telephone : 078-333-8521  
Fax : 078-333-8522  
Telex : J78458 SIGMA

DISTRIBUTED BY

勝特力材料 886-3-5753170  
勝特力电子(上海) 86-21-34970699  
勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)