



◆ 型号及含义 Part NO code

BA9S - □ □ □ □ □ □

符合ROHS: R

Conform to ROHS: R

辅助功能: 抗干扰K6: $\geq 6V$ 、K10: $\geq 10V$

Assistant function: Anti-Jamming: $\geq 6V$ 、K10: $\geq 10V$

符合EMC: E

Conform to EMC: E

颜色: R-红色、Y-黄色、G-绿色、B-蓝色、W-白色

Color: R- red, Y- yellow, G- green, B- blue, W- white

额定电压(AC/DC): 6-6V、12-12V、24-24V、110-110V、220-220V


Rated Voltage(AC/DC): 6-6V、12-12V、24-24V、110-110V、220-220V

品种: P型, PSG-P型闪光灯

Type: P-normal Type, PSG-P Flashing Lamp

灯珠代号

Product code

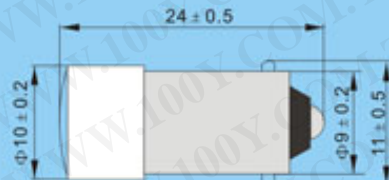

勝特力材料 886-3-5753170

勝特力电子(上海) 86-21-34970699

勝特力电子(深圳) 86-755-83298787

[Http://www.100y.com.tw](http://www.100y.com.tw)

◆技术参数 Technical Data

型号 Part NO	额定工作电压 Rated Voltage (V)	发光颜色 Emitting color	波长 Wavelength (nm)	型号参数 Data sheet		测试电压(V) Testing Voltage (AC/DC)	工作电压范围(V) Operating voltage range (AC/DC)	使用环境温度 Operating Temperature (°C)
				发光亮度 Luminous intensity (cd/m ²)	工作电流 Operating Current (mA)			
BA9S-P BA9S-PSG	6	R	620	2080	≤40	6	6~8	
		Y	585	2800	≤40			
		G	525	1700	≤20			
		B	470	900	≤40			
		W	X=0.31 Y=0.32	2500	≤20			
	12	R	620	2000	≤20	12	12~13.2	
		Y	585	2700	≤20			
		G	525	1500	≤20			
		B	470	850	≤20			
		W	X=0.31 Y=0.32	2450	≤20			
	24	R	620	2000	≤20	24	24~26.4	
		Y	585	2700	≤20			
		G	525	1500	≤20			
		B	470	850	≤20			
		W	X=0.31 Y=0.32	2450	≤20			
	110	R	620	600	≤5	110	110~130	
		Y	585	950	≤5			
		G	525	900	≤5			
		B	470	500	≤5			
		W	X=0.31 Y=0.32	2300	≤5			
220	R	620	460	≤3	220	220~240		
	Y	585	550	≤3				
	G	525	850	≤3				
	B	470	330	≤3				
	W	X=0.31 Y=0.32	1200	≤3				

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)