


Si photodiode

S8193

Detector for X-ray monitors

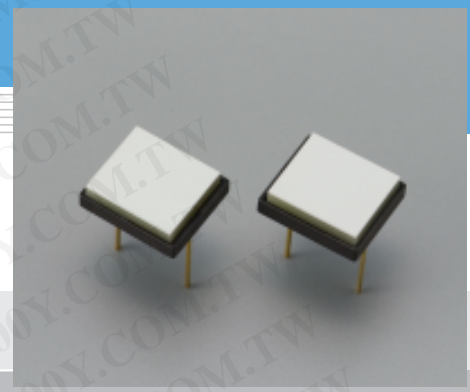

Features

- High sensitivity, high reliability photodiode with ceramic scintillator
- High X-ray sensitivity: 1.8 times that of CWO
- Less afterglow than CsI: <math><0.1\%/3\text{ ms}</math>, <math><0.01\%/30\text{ ms}</math>
- Unlike CsI, has no deliquescence

Applications

- X-ray analysis, X-ray detection

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

■ Absolute maximum ratings (Ta=25 °C)

Parameter	Symbol	Value	Unit
Reverse voltage	VR Max.	5	V
Operating temperature	Topr	-10 to +60	°C
Storage temperature	Tstg	-20 to +70	°C

■ Electrical and optical characteristics (without scintillator, Ta=25°C)


Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Spectral response range	λ		-	190 to 1000	-	nm
Peak sensitivity wavelength	λ_p			720	-	nm
Photo sensitivity	S	$\lambda=500\text{ nm}$	-	0.26	-	A/W
		$\lambda=\lambda_p$	-	0.5	-	A/W
Dark current	ID	VR=10 mV	-	2	50	pA
Terminal capacitance	Ct	VR=0 V, f=10 kHz	-	950	-	pF

■ X-ray sensitivity (reference value, tube current: 1.0 mA, aluminum filter: t=6 mm, distance=830 mm)


X-ray tube voltage	Typ.	Unit
120 keV	30	nA

Note) Depends on equipment and measurement conditions.

■ Dark current vs. reverse voltage

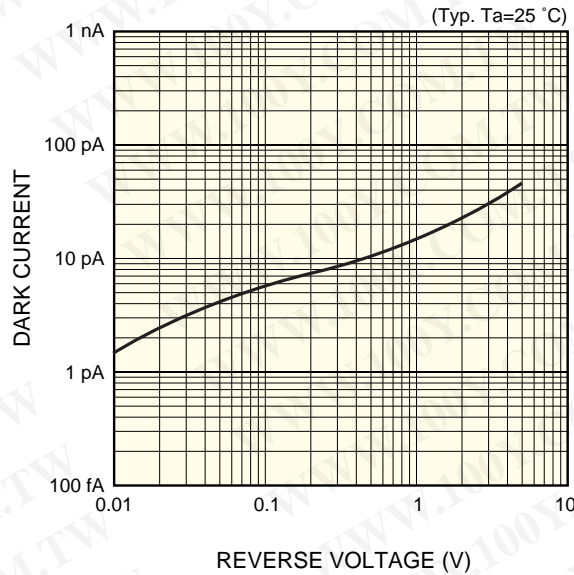

■ Terminal capacitance vs. reverse voltage

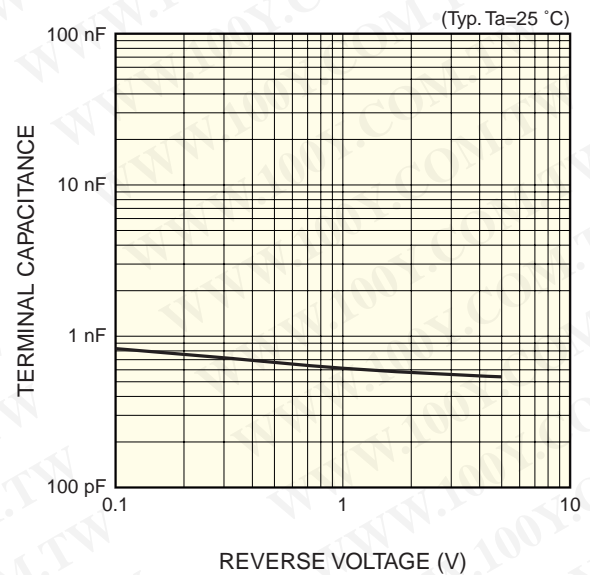

■ Dimensional outline (unit: mm)

