

HOA1405

Reflective Sensor

FEATURES

- Phototransistor output
- Focused for maximum response
- Ambient light and dust protective filter

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)



INFRA-68.TIF


DESCRIPTION

The HOA1405 series consists of an infrared emitting diode and an NPN silicon phototransistor encased side-by-side on converging optical axes in a black thermoplastic housing. The phototransistor responds to radiation from the IRED only when a reflective object passes within its field of view. The HOA1405 series employs an IR transmissive filter to minimize the effects of visible ambient light and to provide a smooth optical face which prevents the accumulation of airborne contaminants in the optical path. The HOA1405 series contains plastic molded components. For additional component information see SEP8505 and SDP8405.

Housing material is polyester. Housings are soluble in chlorinated hydrocarbons and ketones. Recommended cleaning agents are methanol and isopropanol.

OUTLINE DIMENSIONS in inches (mm)

Tolerance 3 plc decimals $\pm 0.010(0.25)$
 2 plc decimals $\pm 0.020(0.51)$

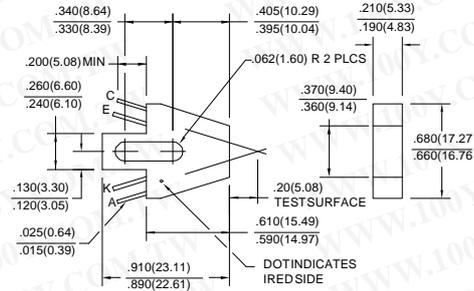

DIM_032.d54

HOA1405

Reflective Sensor

ELECTRICAL CHARACTERISTICS (25°C unless otherwise noted)

PARAMETER	SYMBOL	MIN	TYP	MAX	UNITS	TEST CONDITIONS
IR EMITTER						
Forward Voltage	V_F		1.6		V	$I_F=20\text{ mA}$
Reverse Leakage Current	I_R		10		μA	$V_R=3\text{ V}$
DETECTOR						
Collector-Emitter Breakdown Voltage	$V_{(BR)CEO}$	30			V	$I_C=100\text{ }\mu\text{A}$
Emitter-Collector Breakdown Voltage	$V_{(BR)ECO}$	5.0			V	$I_E=100\text{ }\mu\text{A}$
Collector Dark Current	I_{CEO}		100		nA	$V_{CE}=10\text{ V}, I_F=0$
COUPLED CHARACTERISTICS						
On-State Collector Current	$I_{C(ON)}$				mA	$V_{CE}=5\text{ V}$
HOA1405-001		0.2				$I_F=30\text{ mA}$
HOA1405-002		0.8				(1)
Collector-Emitter Saturation Voltage	$V_{CE(SAT)}$				V	$I_F=30\text{ mA}$ (1)
HOA1405-001	$V_{(BR)CEO}$		0.4			$I_C=30\text{ }\mu\text{A}$
HOA1405-002			0.4			$I_C=100\text{ }\mu\text{A}$
Rise And Fall Time	t_r, t_f		15		μs	$V_{CC}=5\text{ V}, I_C=1\text{ mA}$ $R_L=1000\text{ }\Omega$

Notes

- Test surface is a Eastman Kodak neutral white card with 90% diffuse reflectance located 0.20 in. (5.0 mm) from the front surface of the device.

ABSOLUTE MAXIMUM RATINGS

(25°C Free-Air Temperature unless otherwise noted)

Operating Temperature Range	-40°C to 85°C
Storage Temperature Range	-40°C to 85°C
Soldering Temperature (5 sec)	240°C

IR EMITTER

Power Dissipation	70 mW (1)
Reverse Voltage	3 V
Continuous Forward Current	50 mA

DETECTOR

Collector-Emitter Voltage	30 V
Emitter-Collector Voltage	5 V
Power Dissipation	70 mW (1)


Notes

- Derate linearly at 0.18 mW/°C above 25°C.

Honeywell reserves the right to make changes in order to improve design and supply the best products possible.

Honeywell

SCHEMATIC



HOA1405

Reflective Sensor

Fig. 1 IRED Forward Bias Characteristics

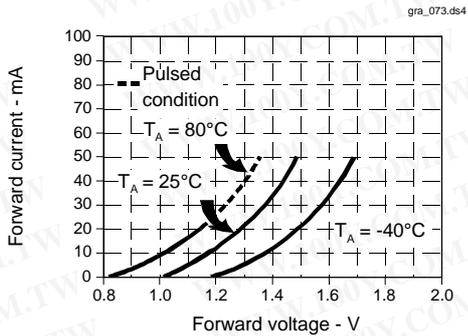


Fig. 2 Non-Saturated Switching Time vs Load Resistance

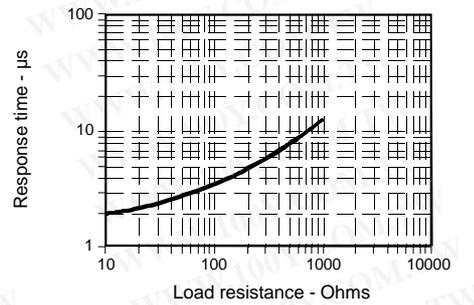


Fig. 3 Dark Current vs Temperature

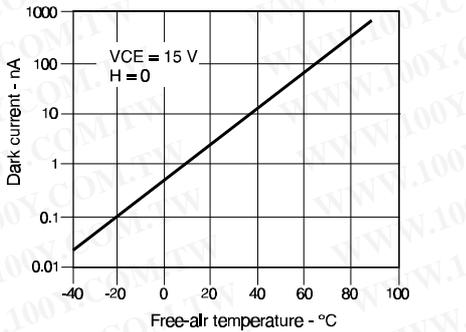


Fig. 4 Collector Current vs Ambient Temperature

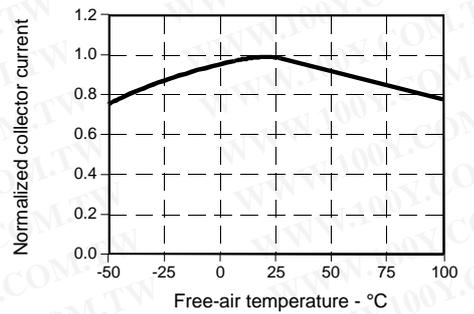


Fig. 5 Collector Current vs Distance to Reflective Surface


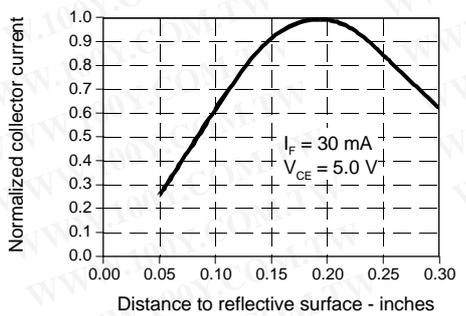


Fig. 6 Collector Current vs IRED Forward Current

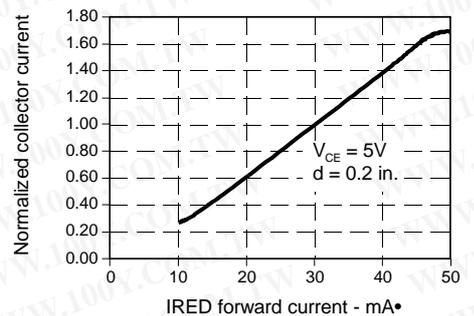

All Performance Curves Show Typical Values

HOA1405

Reflective Sensor

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Honeywell reserves the right to make changes in order to improve design and supply the best products possible.

Honeywell