


勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
 Http://www.100y.com.tw

PHOTO COUPLER PS2044

HIGH SPEED 8PIN PHOTO COUPLER

PACKAGE DIMENSIONS (Unit: mm)

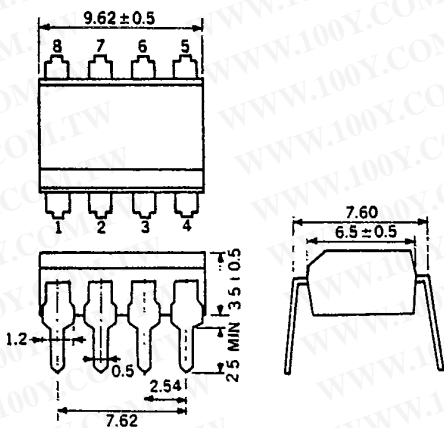


FEATURES

- High Speed Response 0.3 μ s TYP.
- High Isolation Voltage 2500 $V_{r.m.s.}$
- Compact, Dual In-Line Package

APPLICATIONS

1. Interface circuit for various instrumentations, control equipments.
2. Computer and peripheral manufactures.
3. TV sets.

PIN CONNECTION



PIN	Function
1.	NC
2.	Anode
3.	Cathode
4.	NC
5.	Emitter
6.	V_O
7.	NC
8.	V_{CC}

ABSOLUTE MAXIMUM RATINGS ($T_a = 25^\circ C$)

Diode

Forward Current	I_F	25	mA
Reverse Voltage	V_R	5	V
Power Dissipation	P_D	45	mW

Detector

Supply Voltage	V_{CC}	-0.5 to 15	V
Output Voltage	V_O	-0.5 to 15	V
Output Current	I_O	8	mA
Power Dissipation	P_C	100	mW
Isolation Voltage*	BV	2500	$V_{r.m.s.}$
Storage Temperature	T_{stg}	-55 to +125	$^\circ C$
Operating Temperature	T_{opt}	-55 to +100	$^\circ C$
Lead Temperature (10 s)		260	$^\circ C$

* Condition

AC Voltage for 1 minute at $T_a = 25^\circ C$, RH = 60 %
 between input (pin No. 1, 2, 3, 4 Common) and output (pin No. 5, 6, 7, 8 Common)

PS2044



T-41-83

ELECTRICAL CHARACTERISTICS (T_a = 25 °C)







CHARACTERISTIC		SYMBOL	MIN.	TYP.	MAX.	UNIT	TEST CONDITIONS
Diode	Forward Voltage	V _F		1.7	2.2	V	I _F = 16 mA
	Reverse Current	I _R		0.01	10	μA	V _R = 5 V
	Forward Voltage Temperature Coefficient	$\frac{\Delta V_F}{\Delta T}$		-1.6		mV/°C	I _F = 16 mA
	Capacitance	C _t		60		pF	V = 0, f = 1 MHz
Detector	High Level Output Current	I _{OH} (1)		3	500	nA	I _F = 0 mA, V _{CC} = V _O = 5.5 V
	High Level Output Current	I _{OH} (2)			100	μA	I _F = 0 mA, V _{CC} = V _O = 15 V
Coupled	Current Transfer Ratio	CTR *	15	22		%	I _F = 16 mA, V _{CC} = 4.5 V, V _O = 0.4 V
	Low Level Output Voltage	V _{OL}		0.1	0.4	V	I _F = 16 mA, V _{CC} = 4.5 V, I _O = 2.4 mA
	Low Level Supply Current	I _{CCL}		50		μA	I _F = 16 mA, V _O = Open, V _{CC} = 15 V
	High Level Supply Current	I _{CCH}		0.01	1	μA	I _F = 0 mA, V _O = Open, V _{CC} = 15 V
	Isolation Resistance	R ₁₋₂	10 ¹¹			Ω	V _{in-out} = 1 kVDC
	Isolation Capacitance	C ₁₋₂		0.7		pF	V = 0, f = 1 MHz
	Propagation Delay Time to Low Output Level	t _{PHL} **		0.3	0.8	μs	I _F = 16 mA, V _{CC} = 5 V, R _L = 1.9 kΩ
	Propagation Delay Time to High Output Level	t _{PLH} **		(K/L/R) 0.3/1.0/0.8	(K/L/R) 0.8/1.5/1.25	μs	I _F = 16 mA, V _{CC} = 5 V, R _L = 1.9 kΩ

* CTR rank
 K: 15 % ~
 L: 25 % ~
 R: 20 % ~

** Measuring circuit



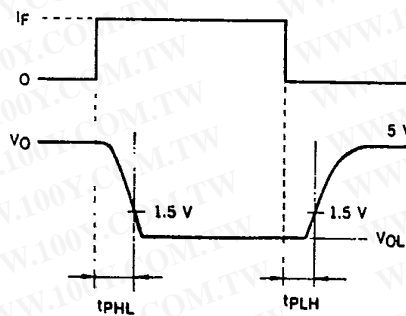
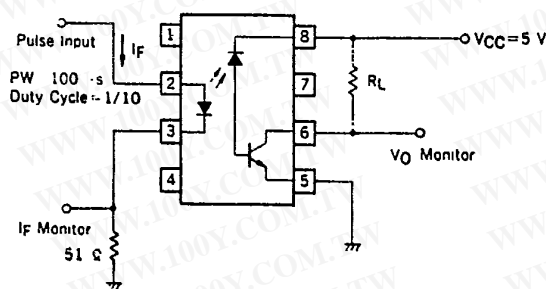


TYPICAL CHARACTERISTICS ($T_a = 25^\circ\text{C}$)

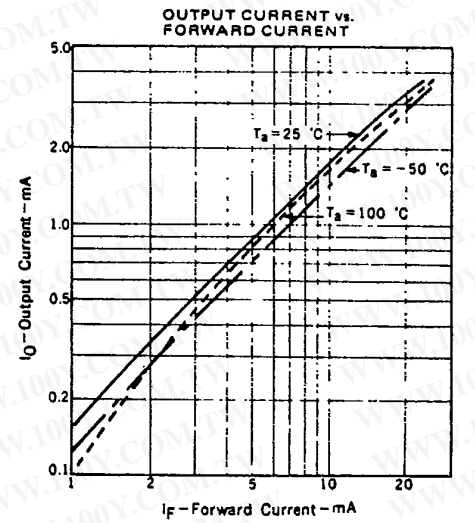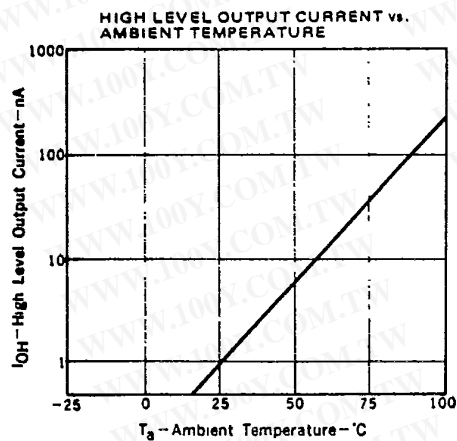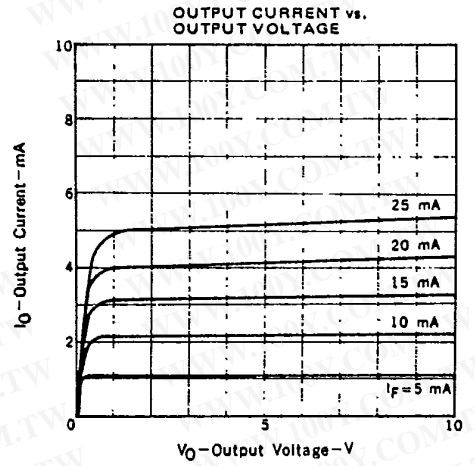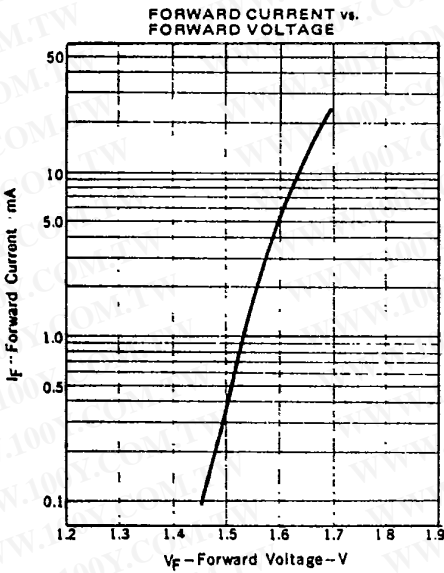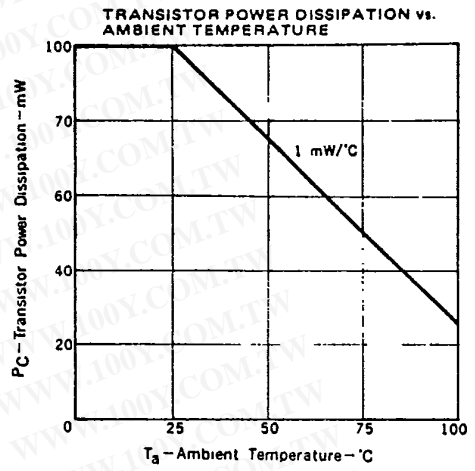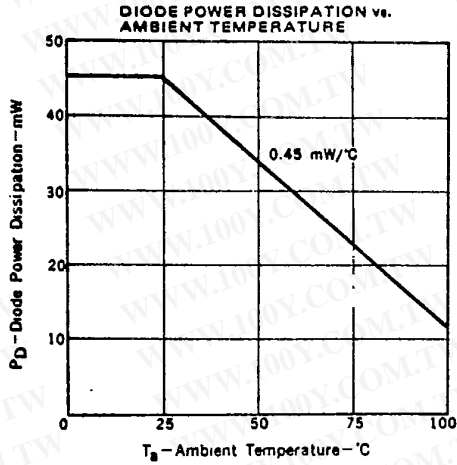

PS2044

T-41-83

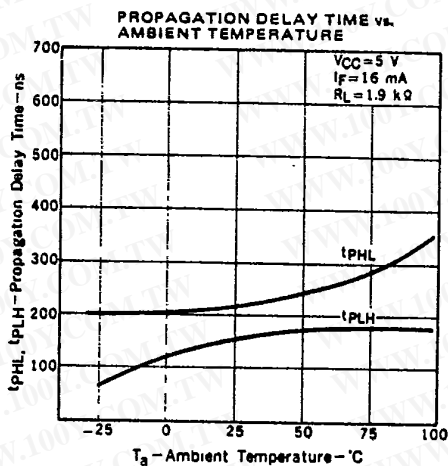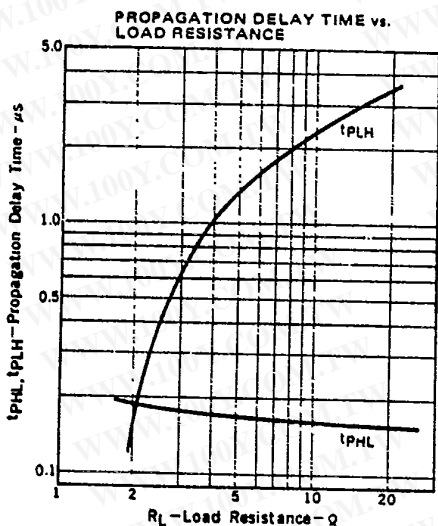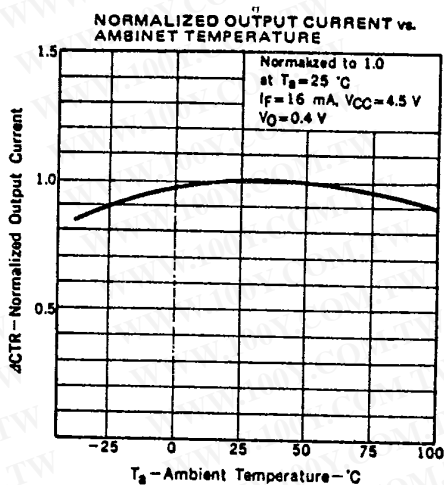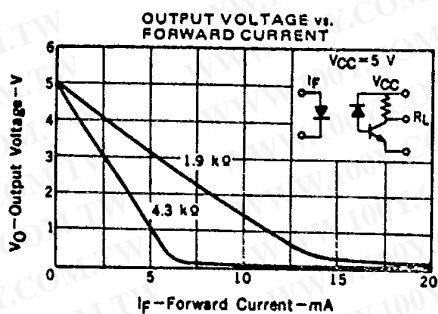

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)