


# Silicon Photo Darlington in Miniature 1206 SMD Package

## OP520DA, OP521DA



### Features:

- High Photo Sensitivity
- Fast Response Time
- 1206 Package Size
- Opaque or Water Clear Flat Lens
- High Current Gain

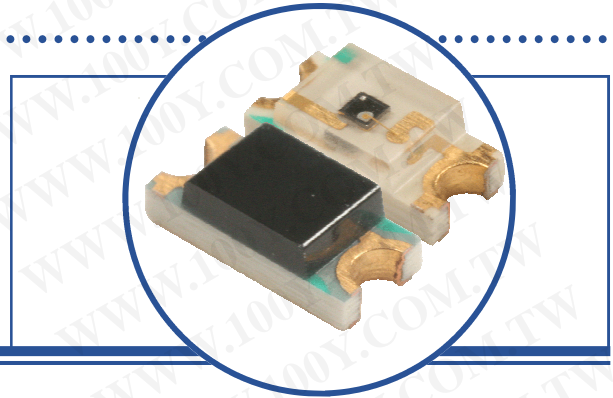

### Descriptions:


The **OP520DA** and **OP521DA** are NPN silicon photo darlington mounted in miniature 1206 SMD packages. Both the **OP520DA** and **OP521DA** have a flat lens however, the **OP520DA** lens are opaque to shield the device from ambient light unlike the lens of the **OP521DA**. These sensors are packaged in compact 1206 size chip carriers that are compatible with most automated mounting equipment. The **OP520DA** and **OP521DA** are mechanically and spectrally matched to the OP250 series infrared LEDs.

Since these devices have a flat window lens, they enable a wide acceptance angle. It is packaged in a plastic leadless chip carrier which is compatible for new applications with that need smaller dimension packages for automated mounting and detection equipment with new innovative designs. **OP520DA** and **OP521DA** are 100% production tested using infrared light for close correlation with Optek GaAs and GaAlAs emitters. Photo darlington devices are normally used in application where light signals are low and more current gain is needed than in comparison to the standard phototransistors.


### Applications

- Non-Contact Position Sensing
- Datum detection
- Machine automation
- Optical encoders

Ordering Information			
Part Number	Sensor	Viewing Angle	Lead Length
<b>OP520DA</b>	Photo Darlington	150°	N/A
<b>OP521DA</b>	Photo Darlington		

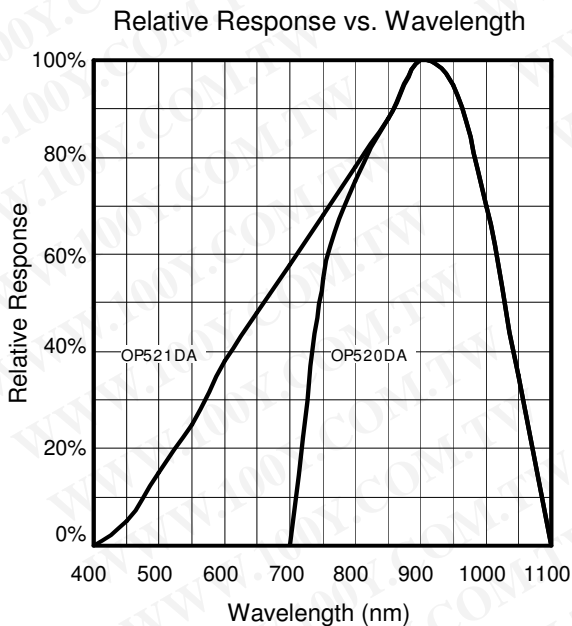

OP520DA, OP521DA



勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-34970699  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)



Optek reserves the right to make changes at any time in order to improve design and to supply the best product possible.

OPTEK Technology Inc.— 1645 Wallace Drive, Carrollton, Texas 75006  
 Phone: (800) 341-4747 FAX: (972) 323-2396 sensors@optekinc.com www.optekinc.com



A subsidiary of  
 TT electronics plc

**Silicon Photo Darlington in Miniature 1206 SMD Package**  
**OP520DA, OP521DA**



**Absolute Maximum Ratings**  $T_A = 25^\circ\text{C}$  unless otherwise noted

Storage Temperature Range	-40° C to +100° C
Operating Temperature Range	-25° C to +85° C
Lead Soldering Temperature	260° C <sup>(1)</sup>
Collector-Emitter Voltage	35V
Emitter-Collector Voltage	5 V
Collector Current	30 mA
Power Dissipation	100 mW <sup>(2)</sup>



Notes:

- Solder time less than 5 seconds at temperature extreme.
- De-rate linearly at 2.17 mW/°C above 25° C.

**Electrical Characteristics** ( $T_A = 25^\circ\text{C}$  unless otherwise noted)

SYMBOL	PARAMETER	MIN	TYP	MAX	UNITS	CONDITIONS
$I_{C(ON)}$	On-State Collector Current	10.0			mA	$V_{CE} = 5.0V, E_e = 0.5mW/cm^2$ <sup>(3)</sup>
$V_{CE(SAT)}$	Collector-Emitter Saturation Voltage			1.7	V	$I_C = 1mA, E_e = 5.0mW/cm^2$ <sup>(3)</sup>
$I_{CEO}$	Collector-Emitter Dark Current			200	nA	$V_{CE} = 5.0V, E_e = 0$ <sup>(4)</sup>
$V_{(BR)CEO}$	Collector-Emitter Breakdown Voltage	35			V	$I_C = 100\mu A, E_e = 0$
$V_{(BR)ECO}$	Emitter-Collector Breakdown Voltage	5			V	$I_E = 100\mu A, E_e = 0$
$\lambda$	Spectral range of sensitivity					$V_{CE} = 5.0V$
	OP521DA	400		1100	nm	
	OP520DA	700		1100	nm	
$t_r, t_f$	Rise and Fall Times		50		$\mu s$	$I_C = 1mA, R_L = 1K\Omega$

- Light source is an unfiltered GaAs LED with a peak emission wavelength of 935nm and a radiometric intensity level which varies less than 10% over the entire lens surface of the photo darlington being tested.
- To Calculate typical collector dark current in  $\mu A$ , use the formula  $I_{CEO} = 10^{(0.04 T_A - 3/4)}$  where  $T_A$  is the ambient temperature in °C.

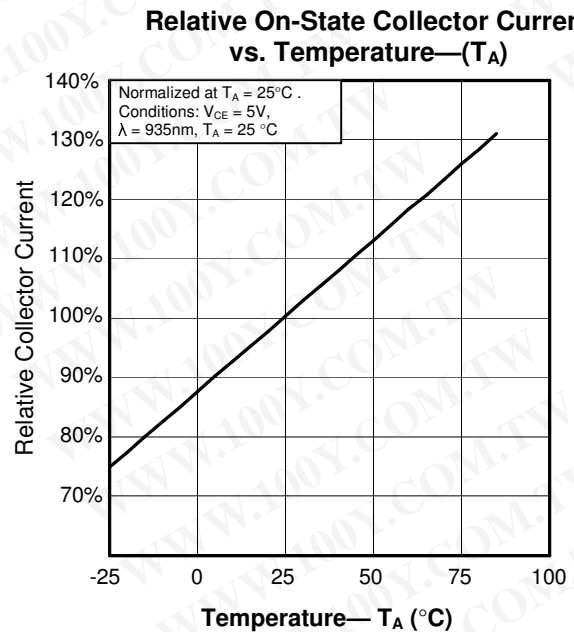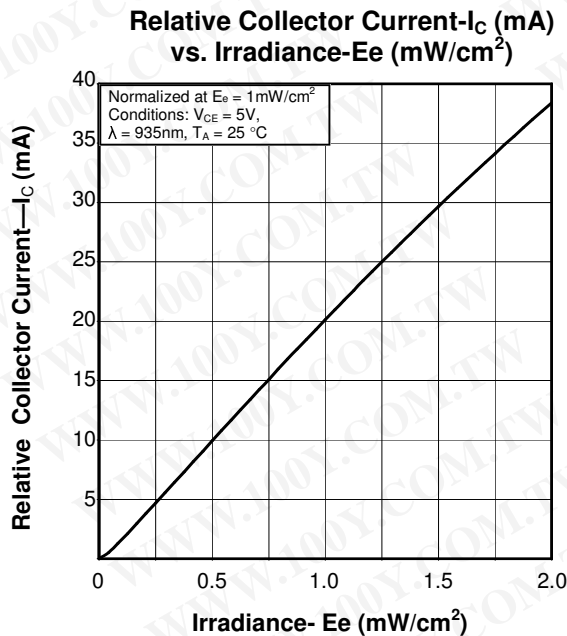


**Silicon Photo Darlington in Miniature 1206 SMD  
Package  
OP520DA, OP521DA**




**OP520DA, OP521DA**

Relative On-State Collector Current  
vs. Collector-Emitter Voltage

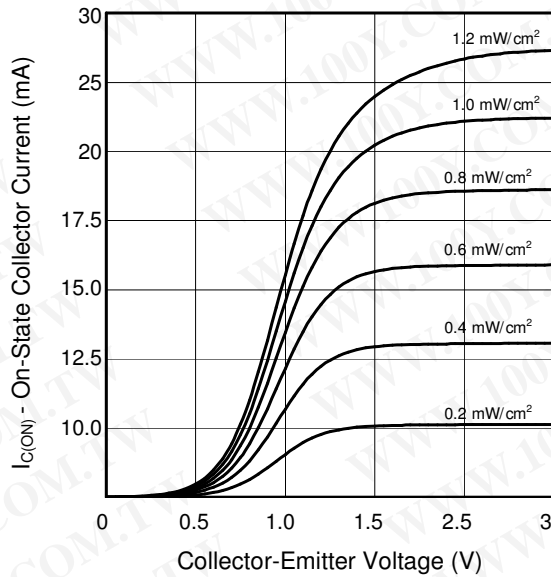


Collector-Emitter Dark Current  
vs. Temperature

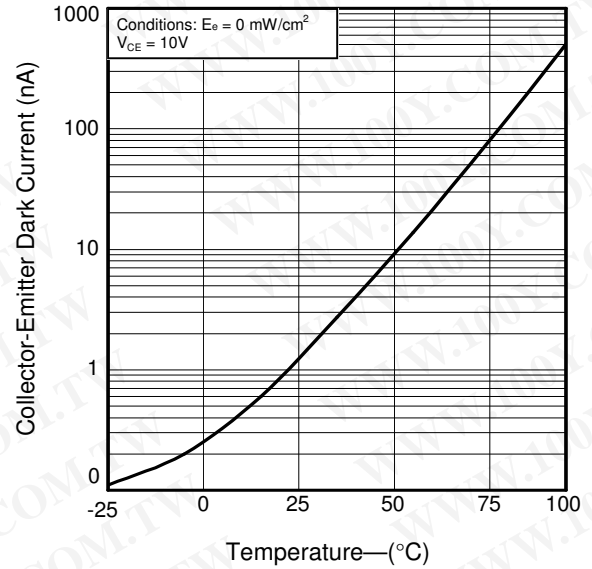

# Silicon Photo Darlington in Miniature 1206 SMD Package OP520DA, OP521DA




## Package Dimensions

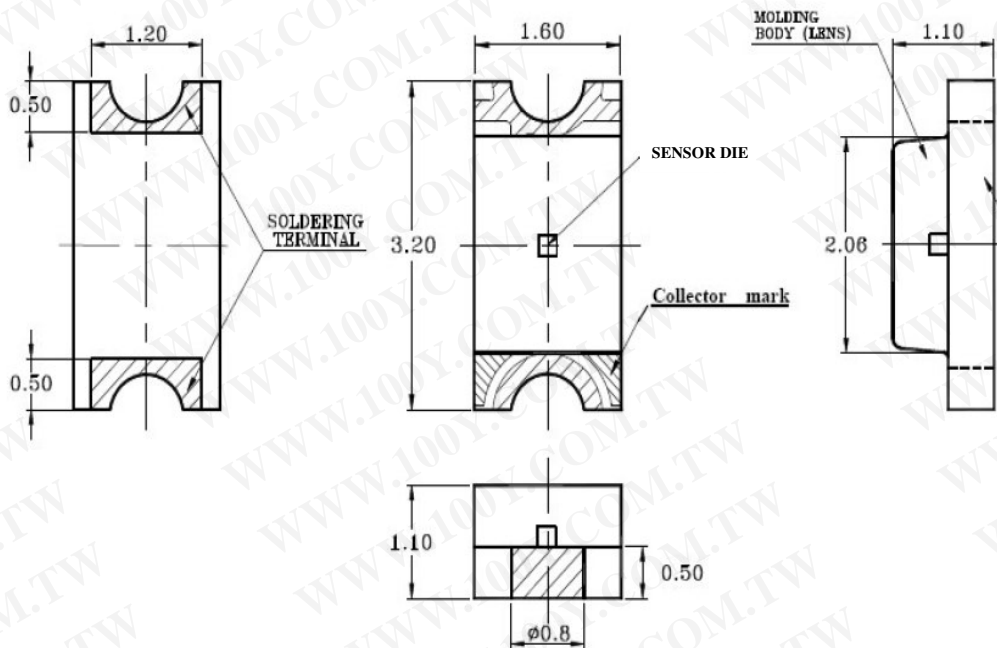

OP520DA, OP521DA



### RECOMMENDED SOLDER PADS

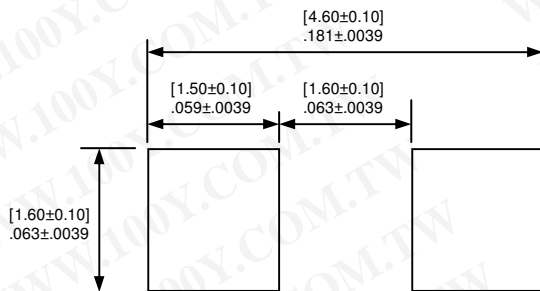

PIN	FUNCTION
1	Collector
2	Emitter