
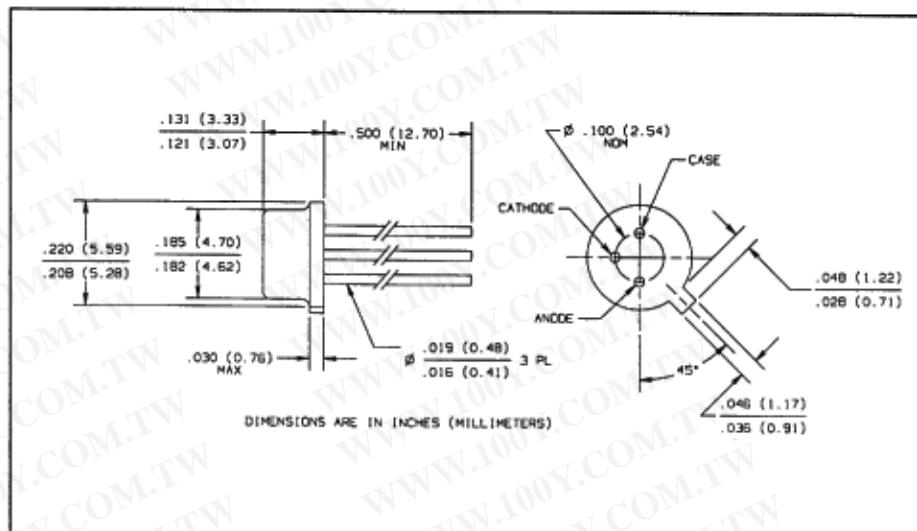


Fiber Optic GaAlAs LED

Types OPF320A, OPF320B, OPF320C

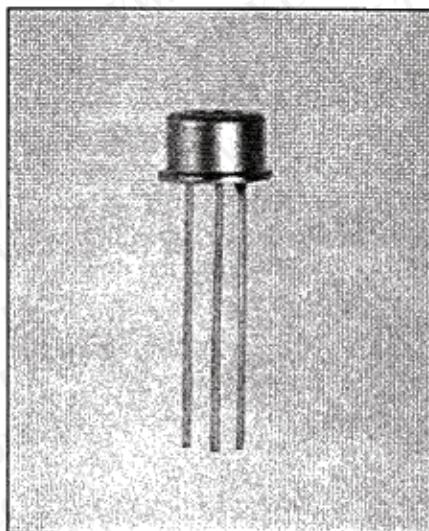

Features

- High radiant output for fiber optic applications
- High speed
- Electrically isolated from case

Description

The OPF320 series LED provides fiber optic users with high coupled power and wide bandwidth in an easily mounted hermetic package.

The LED's are designed to interface with multimode optical fibers from 50/125 to 200/300 microns.

Absolute Maximum Ratings ($T_A = 25^\circ C$ unless otherwise noted)

Reverse Voltage	1.0 V
Continuous Forward Current	100 mA ⁽⁴⁾
Storage Temperature Range	-55° C to +150° C
Operating Temperature Range	-40° C to +125° C
Lead Soldering Temperature [1/16 inch (1.6 mm) from case for 5 sec. with soldering iron]	240° C ⁽¹⁾

Notes:

- (1) RMA flux is recommended. Duration can be extended to 10 sec. max when flow soldering.
- (2) Graded index fiber, 50 μm core, N.A. = 0.20.
- (3) To convert radiant power output to dBm, use the following expression: $dBm = 10 \log (\mu W/1000)$.
- (4) Derate linearly @ 1.0 mA/ $^\circ C$ above 25° C.
- (5) Prebias @ 5 mA current.

LED Burn-in

All LED's are subject to 100% burn-in testing. Test conditions are 96 hours at 100 mA continuous current in 25° C ambient.

TYPICAL COUPLED POWER into OPTICAL FIBER

$I_F = 100 \text{ mA} @ 25^\circ C$					
Fiber	Refractive Index	N.A.	OPF320C	OPF320B	OPF320A
50/125 μm	Graded	0.20	7.5 μW	12.5 μW	19 μW
62.5/125 μm	Graded	0.28	16 μW	22 μW	34 μW
100/140 μm	Graded	0.29	38 μW	62 μW	95 μW
200/300 μm^*	Step	0.41	140 μW	235 μW	360 μW

*PCS - Plastic Clad Silica

勝特力材料 886-3-5753170
 胜特力电子(上海) 86-21-54151736
 胜特力电子(深圳) 86-755-83298787

[Http://www.100y.com.tw](http://www.100y.com.tw)

Types OPF320A, OPF320B, OPF320C

Electrical Characteristics ($T_A = 25^\circ C$ unless otherwise noted)

SYMBOL	PARAMETER	MIN	TYP	MAX	UNITS	TEST CONDITIONS
P _o	Radiant Power Output OPF320C OPF320B OPF320A	5.0 10.0 15.0	7.5 12.5 19.0		μW	I _F = 100 mA ⁽²⁾
V _F	Forward Voltage		1.8	2.0	V	I _F = 100 mA
λ _p	Peak Output Wavelength	830	850	870	nm	I _F = 50 mA
B	Spectral Bandwidth Between Half Power Points		35		nm	I _F = 50 mA
t _r	Output Rise Time		6.0	8.0	ns	I _F = 100 mA, 10%-90% ⁽⁵⁾
t _f	Output Fall Time		6.0	10.0	ns	I _F = 100 mA, 90%-10% ⁽⁵⁾

Typical Performance Curves

