



(液 晶 顯 示 模 組 樣 品 確 認 書)

1) COMPANY NAME (客戶名稱) :

2) SDEC ITEM NO. (產品型號) :

3) CUSTOMER ITEM NO. (客戶產品型號) :

4) LCM Function (LCM 内容):

A	LCD TYPE (LCD 種類) : ☐ TN, ☐ HTN, ☐ STN, ☐ FSTN (☐ POSITIVE/正向, ☐ NEGATIVE/反向, ☐ BLACK MASK/內黑絲印)
B	VIEWING AREA (視角方向) : ☐ 3H, ☐ 6H, ☐ 9H, ☐ 12H
C	POLARIZER COLOR (偏光板顏色) : ☐ GRAY/灰色, ☐ YELLOW GREEN/黃綠色, ☐ BLUE/藍色, ☐ BLACK/黑色
D	BACKLIGHT COLOR (背光顏色) : ☐ YELLOW GREEN/黃綠光, ☐ ORANGE/橘光 ☐ RED/紅光, ☐ BLUE/藍光, ☐ GREEN/翠綠光, ☐ WHITE/白光
E	TEMPERATURE (溫度) : ☐ NORMAL/常溫, ☐ WIDE/廣溫
F	PCB RESISTOR (PCB 板電阻) : R1(K Ω), R2/R3/R5/R6(2K Ω), R4(K Ω), R7(Ω), R10(Ω), R11(Ω), R12(Ω), D1()
G	CONTROL IC (控制 IC) :

SAMPLE DELIVERY DATE (出様日期) :

2 · PART B: FILLED BY CUSTOMER (請客戶填寫)

CHECK LIST ITEMS (檢查項目) :

OK NG

REASON (原因)

1).LCM SIZE AND THICKNESS:(LCM 尺寸及厚度):

□ □

2).POLARIZER COLOR：（偏光板色澤）：

□ □

3).ELECTRO CHARACTERISTIC：（電氣特性）：

□ □

4).VIEWING AREA (視角範圍) :

100

5).BACKLIGHT ILLIMINATION (背光亮度) :

□ □

6).TEMPERATURE RANGE (溫度範圍) :

11

APPROVED BY (批准) :

DATE OF APPROVAL (批准日期) :

勝特力材料 886-3-5753170
勝特力電子(上海) 86-21-54151736
勝特力電子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

0.1 SDEC LCD MODULE NUMBERING SYSTEM

LM	C	—	S	T	C	2	E	16	D	L	Y	Y	—	
[1]	[2]		[3]	[4]	[5]	[6]	[7]	[8]	[9]	[10]	[11]	[12]		[13]

LM	G	—	S	S		12	A	64	U	E	G	W	—	
[1]	[2]		[3]	[4]	[5]	[6]	[7]	[8]	[9]	[10]	[11]	[12]		[13]

0.2 SDEC LCD MODULE VARIATION LIST

NO	ITEM		DESCRIPTION														
[1]	LCD MODULE		LIQUID CRYSTAL DISPLAY MODULE														
[2]	LCM MODULE		D	DIGITS MODEL			C	CHARACTER MODEL			G	GRAPHIC MODEL					
[3]	LCM OF FUNCTION		B	BIG SIZE TYPE				S	SMALL/NORMAL TYPE								
[4]	LCD MODEL		T	TN LCD				H	HTN LCD								
			S	STN LCD				F	FSTN LCD								
[5]	IC PACKING			PACKAGE TYPE			C	CHIP(OR COG)TYPE			T	TAB TYPE					
[A]	STANDARD TYPE LCM	[6]	CHARACTER MODEL : NUMBER OF LINES					GRAPHIC MODEL : WIDE SIDE OF DOTS									
		[7]	FROM A TO Z														
		[8]	CHARACTER MODEL:NUMBER OF CHARACTER					GRAPHIC MODEL:HIGH SIDE OF DOTS									
[B]	STANDARD OR CUSTOM DESIGNED TYPE LCM	[6]	DIGITS MODEL : YEAR+MONTH+NUMBER														
		[7]	CHARACTER MODEL : CHARACTER+LINES+NUMBER														
		[8]	GRAPHIC MODEL : WIDE SIDE DOTS+HIGH SIDE DOTS+NUMBER														
[9]	VIEWING ANGLE		R	3 O'CLOCK			D	6 O'CLOCK			L	9 O'CLOCK			U	12 O'CLOCK	
[10]	BACKLIGHT		R	WITHOUT BACKLIGHT				E	EL (TRANSFLECTIVE)								
			L	ARRAY LED (TRANSFLECTIVE)				F	FL (TRANSMISSIVE)								
[11]	POLARIZER COLOR		G	GRAY				Y	YELLOW GREEN								
			N	NEGATIVE STN TYPE : BLUE													
				NEGATIVE FSTN TYPE : BLACK													
[12]	BACKLIGHT COLOR		B	BLUE				G	GREEN								
			O	ORANGE				R	RED								
			W	WHITE				Y	YELLOW GREEN								
[13]	VERSION		01	ENGLISH-JAPANESE				02	ENGLISH-EURPEAN								
			03	ENGLISH-RUSSIAN				E	EDGE LED BACKLIGHT								

※ All of our STN Panel belong “WIDE TEMPERATURE”


CONTENTS

	PAGE
● LCM Sample Approval	2
0. LCD Module Number System	3
1. Mechanical Specification	5
2. Mechanical Diagram	5
3. Interface Pin Connections	5
4. Block Diagram	5
5. Absolute Maximum Ratings	6
6. Electrical Characteristics	6
7. Optical Characteristics	6
8. Optical Definitions	6
9. Display Address	6
10. Interface to MPU	7
10.1 Interface to Z-80 CPU	7
10.2 Interface to MC6800 CPU	7
10.3 Interface to 4-bit CPU (HMCS43C)	7
10.4 Interface to HD6805 MP	7
11. Timing Control	7
11.1 Write and Read Operation	7
11.2 Busy flag check timing	7
12. Initialization of LCM	8
13. Instruction Set	9
14. User Font Patterns	9
15. Software Example	10
15.1 8-bit operation (8 bits 2 lines)	10
15.2 4-bit operation (4 bits 2 lines)	10
16. Character Generator ROM Map	11
17. Reliability Condition	12
18. Function Test & Inspection Criteria	12
19. Test – Normal Temperature	15
20. Test – Wide Temperature	16
21. Precautions Against Product Handling	17
22. Warranty	18

1. Mechanical Specification

ITEM	STANDARD VALUE			UNIT
NUMBER OF CHARACTERS	24 CHARACTERS X 2 LINES			--
CHARACTER FORMAT	5 X 8 DOTS			--
MODULE DIMENSION NO BACKLIGHT, EL BACKLIGHT	118.0 (W) X 36.0 (H) X 10.5			mm
MODULE DIMENSION EDGE LED BACKLIGHT	--			mm
MODULE DIMENSION ARRAY LED BACKLIGHT	118.0 (W) X 36.0 (H) X 15.0			mm
MODULE DIMENSION EDGE LED BACKLIGHT (BLUE)	118.0 (W) X 36.0 (H) X 12.0 (T)			mm
VIEWING DISPLAY AREA	94.5 (W) X 17.8 (H)			mm
ACTIVE DISPLAY AREA	88.3 (W) X 11.5 (H)			mm
CHARACTER SIZE	3.20 (W) X 5.55 (H)			mm
CHARACTER PITCH	3.70 (W) X 5.95 (H)			mm
DOT SIZE	0.60 (W) X 0.65 (H)			mm
DOT PITCH	0.65 (W) X 0.70 (H)			mm
● EL Use INVERTER TYPE	SDEC-I002A			
INVERTER INPUT	DC+5V	V	40	mA
INVERTER OUTPUT	AC 90 ~ 110	V	400 ~ 700	Hz
BACKLIGHT HALF-LIFT TIME	3,000			HR.
● ARRAY LED BACKLIGHT COLOR	YELLOW GREEN OR ORANGE OR RED			
BACKLIGHT INPUT	DC +5.0V	V	160	mA
BACKLIGHT HALF-LIFT TIME	30,000			HR.
● EDGE LED BACKLIGHT COLOR	BLUE OR GREEN OR WHITE			
BACKLIGHT INPUT	DC +3.2V	V	52	mA
BACKLIGHT HALF-LIFT TIME	3,000 (AVOID LIGHTING CONTINUOUSLY)			HR.


2. Mechanical Diagram

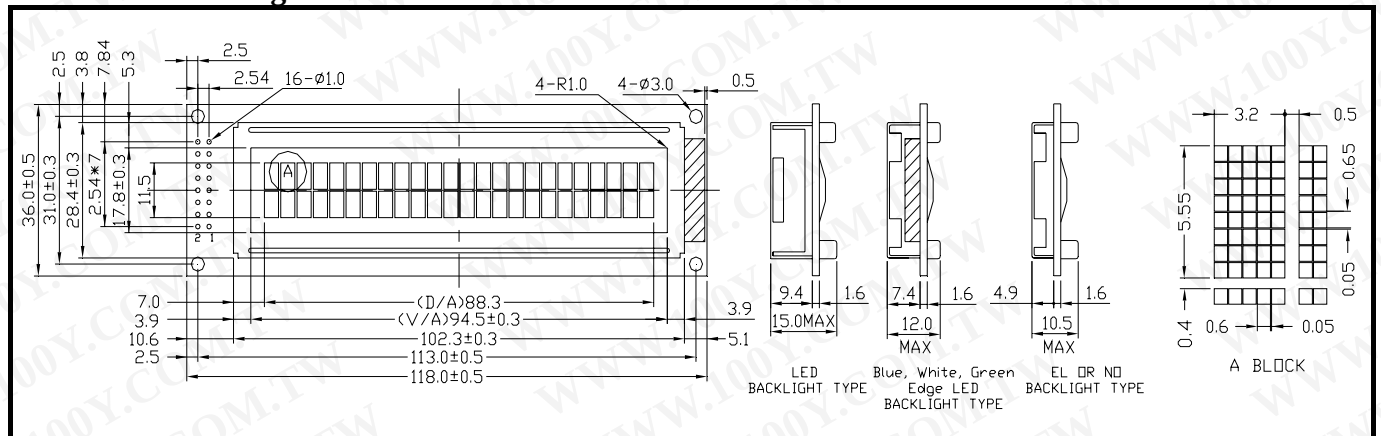

3. Interface Pin Connections

NO	SYMBOL	LEVEL	FUNCTION
1	VSS	--	GND (0V)
2	VDD	--	DC +5V
3	VO	H/L	Contrast Adjust
4	RS	H/L	Register select
5	R/W	H/L	Read/Write
6	E	H,H→L	Enable signal
7	DB0	H/L	Data Bit 0
8	DB1	H/L	Data Bit 1
9	DB2	H/L	Data Bit 2
10	DB3	H/L	Data Bit 3
11	DB4	H/L	Data Bit 4
12	DB5	H/L	Data Bit 5
13	DB6	H/L	Data Bit 6
14	DB7	H/L	Data Bit 7
15	A(+)	DC+5V	LED Backlight +
16	K(-)	0V	LED Backlight -

4. Block Diagram

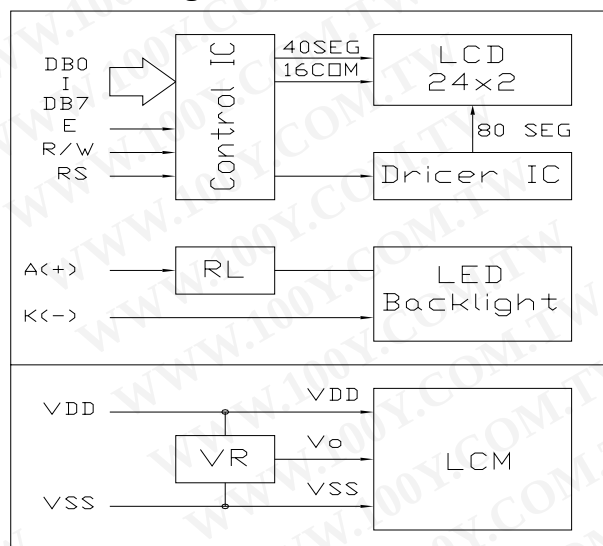

5. Absolute Maximum Ratings

ITEM		SYMBOL	MIN.	TYPE	MAX.	UNIT
INPUT VOLTAGE		VI	VSS	—	VDD	V
SUPPLY VOLTAGE FOR LOGIC		VDD-VSS	—	5.0	6.5	V
SUPPLY VOLTAGE FOR LCD		VDD-VO	—	—	6.5	V
TN	NORMAL TEMPERATURE RANGE	OPERATING	0~+50	STORAGE	-10~+60	℃
HTN	WIDE TEMPERATURE RANGE	OPERATING	-20~+70	STORAGE	-30~+80	℃
STN	WIDE TEMPERATURE RANGE	OPERATING	-20~+70	STORAGE	-30~+80	℃
STATIC ELECTRICITY		Be sure that you are grounded when handling LCM.				

6. Electrical Characteristics

ITEM	SYN	CONDITION	MIN.	TYPE	MAX.	UNIT
SUPPLY VOLTAGE FOR LOGIC	VDD - VSS	—	4.5	5.0	5.5	V
SUPPLY VOLTAGE FOR LCD	VDD - VO	Ta = 0/-20°C	—	4.6	—	V
		Ta = 25°C	4.1	4.3	4.5	V
		Ta = +50/+70°C	—	4.0	—	V
INPUT HIGH VOLTAGE	VIH	—	2.2	—	VDD	V
INPUT LOW VOLTAGE	VIL	—	0	—	0.6	V
OUTPUT HIGH VOLTAGE	VOH	—	2.4	—	—	V
OUTPUT LOW VOLTAGE	VOL	—	—	—	0.4	V
SUPPLY CURRENT	IDD	VDD = +5V	—	3.0	4.5	mA


7. Optical Characteristics

Ta at 25°C


ITEM	SYM	CONDITION	MIN.	TYPE	MAX.	UNIT
VIEW ANGLE (TOP/BOTTOM)	$\theta 1 \sim \theta 2$	CR ≥ 5	-15°/-35°	—	35°/45°	deg.
VIEW ANGLE (LEFT/RIGHT)	$\phi 1 \cdot \phi 2$	CR ≥ 5	-35°	—	35°	deg.
CONTRAST RATIO	CR	—	—	8	—	—
RESPONSE TIME (RISE)	TON/Tr	—	—	170	—	mS
RESPONSE TIME (DECAY)	TOFF/Tf	—	—	220	—	mS

8. Optical Definitions


Response Time

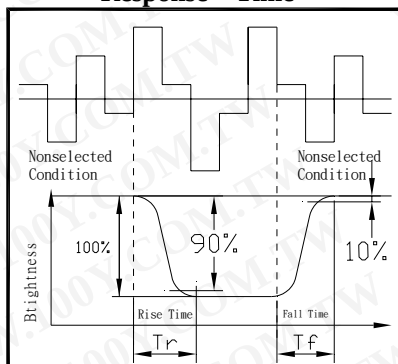

Contrast Ration

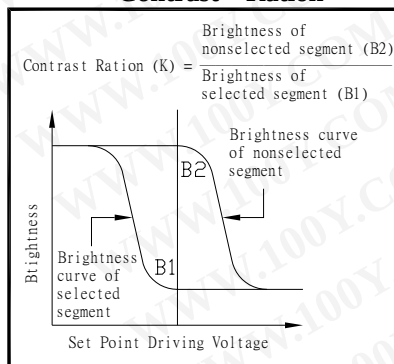

View Angle

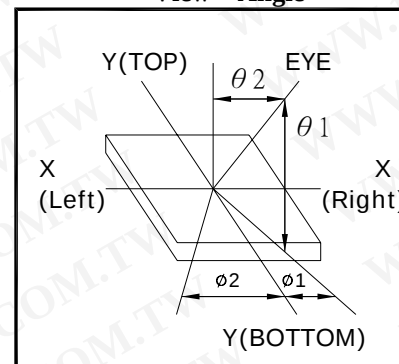


9. Display Address

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
Line 1	80	81	82	83	84	85	86	87	88	89	8A	8B	8C	8D	8E	8F	90	91	92	93
Line 2	C0	C1	C2	C3	C4	C5	C6	C7	C8	C9	CA	CB	CC	CD	CE	CF	D0	D1	D2	D3
Line 3																				
Line 4																				


	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40
Line 1	94	95	96	97																
Line 2	D4	D5	D6	D7																
Line 3																				
Line 4																				

10. Interface to MPU


10.1 Interface to Z-80 CPU

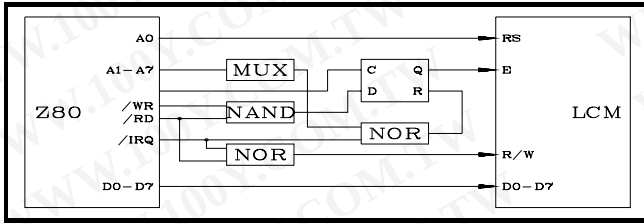


10.2 Interface to MC6800 CPU

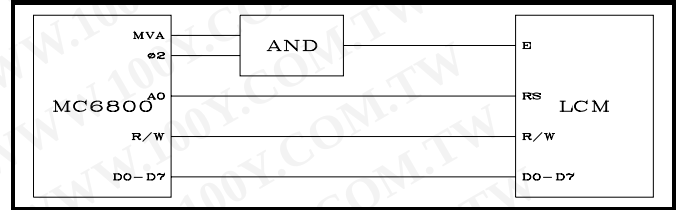

10.3 Interface to 4-bit CPU (HMCS43C)

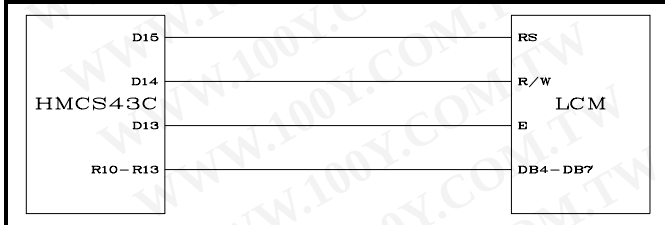


10.4 Interface to HD6805 MP

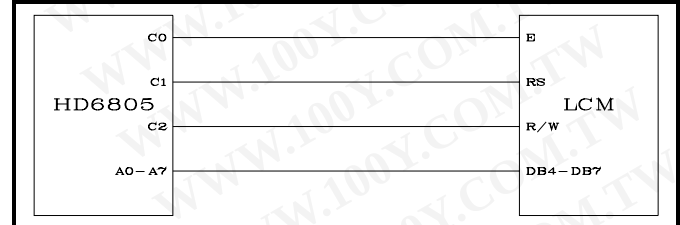


11. Timing Control

11.1 Write and Read Operation

Write Operation

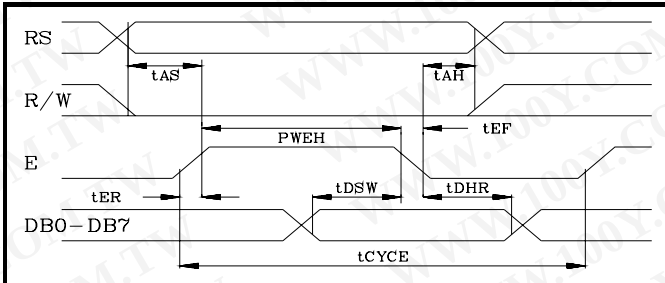


Read Operation

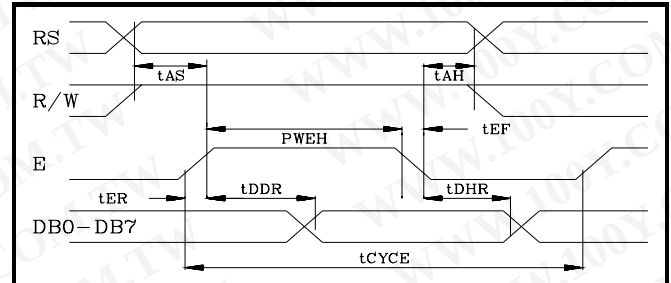

Item	Symbol	Limit (Min.)	Limit (Max.)	Unit
Enable Cycle Time	tCYCE	1000	--	ns
Enable Pules Width (High level)	PWEH	450	--	ns
Enable Rise/Fall Time	tER,tEF	--	25	ns
Address Set-Up Time (RS,R/W,E)	tAS	100	--	ns
Address Hole Time	tAH	10	--	ns
Data Set-Up Time	tDSW	100	--	ns
Data Delay Time	tDDR	--	190	ns
Data Hold Time	tDHR	20	--	ns

11.2 Busy flag check timing

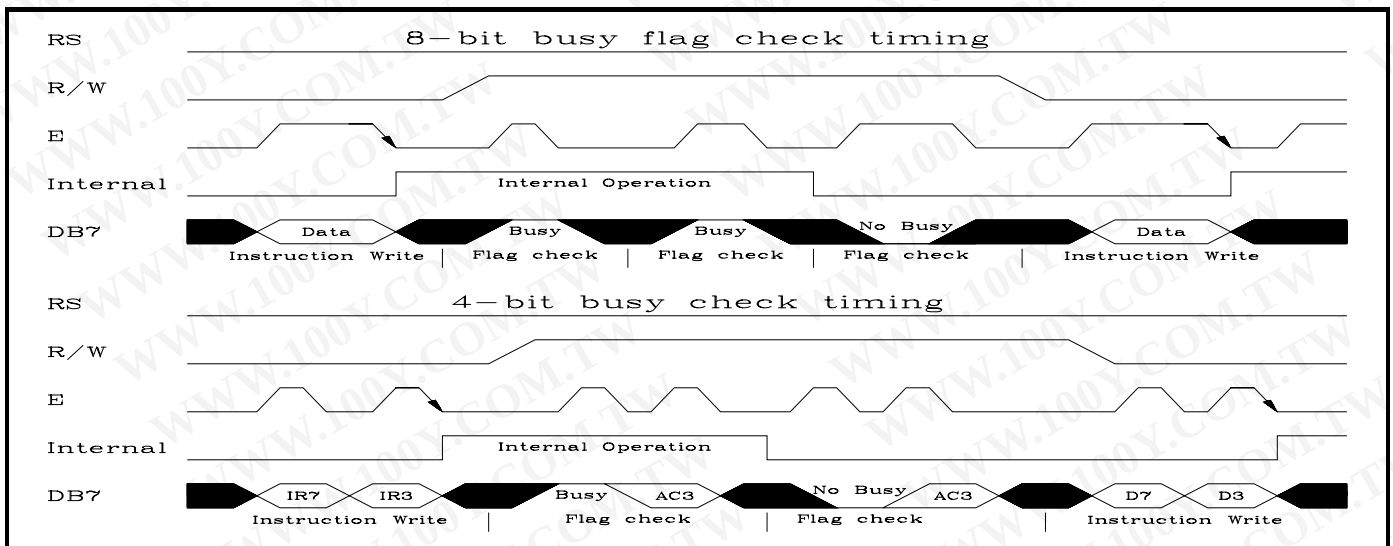


Note: IR7, IR3: Instruction 7th bit, 3rd bit; AC3: Address Counter 3rd bit.

12. Initialization of LCM

The LCM automatically initializes (reset) when power is turned on using the internal reset circuit. If the power supply conditions for correctly operating of the internal reset circuit are not met, initialization by instruction is required. Use the procedure is next page for initialization.

Internal Power Supply reset

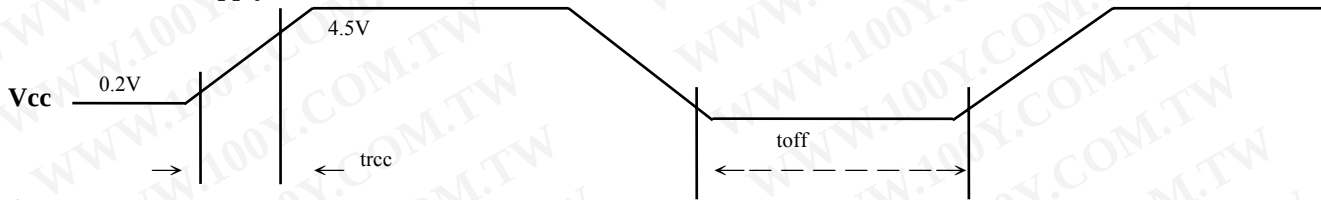


(Note 1) $10\text{ ms} \geq \text{trcc} \geq 0.1\text{ ms}$, $\text{toff} \geq 1\text{ ms}$.

(Note 2) toff stipulates the time of power OFF for momentary power supply dip or when power supply cycles ON and OFF.

Item	Symbol	Test condition	Limit (Min.)	Limit (Max.)	Unit
Power supply rise time	trcc	--	0.1	10	ms
Power supply off time	toff	--	1	--	ms

(a) 8-bit interface

(b) 4-bit interface

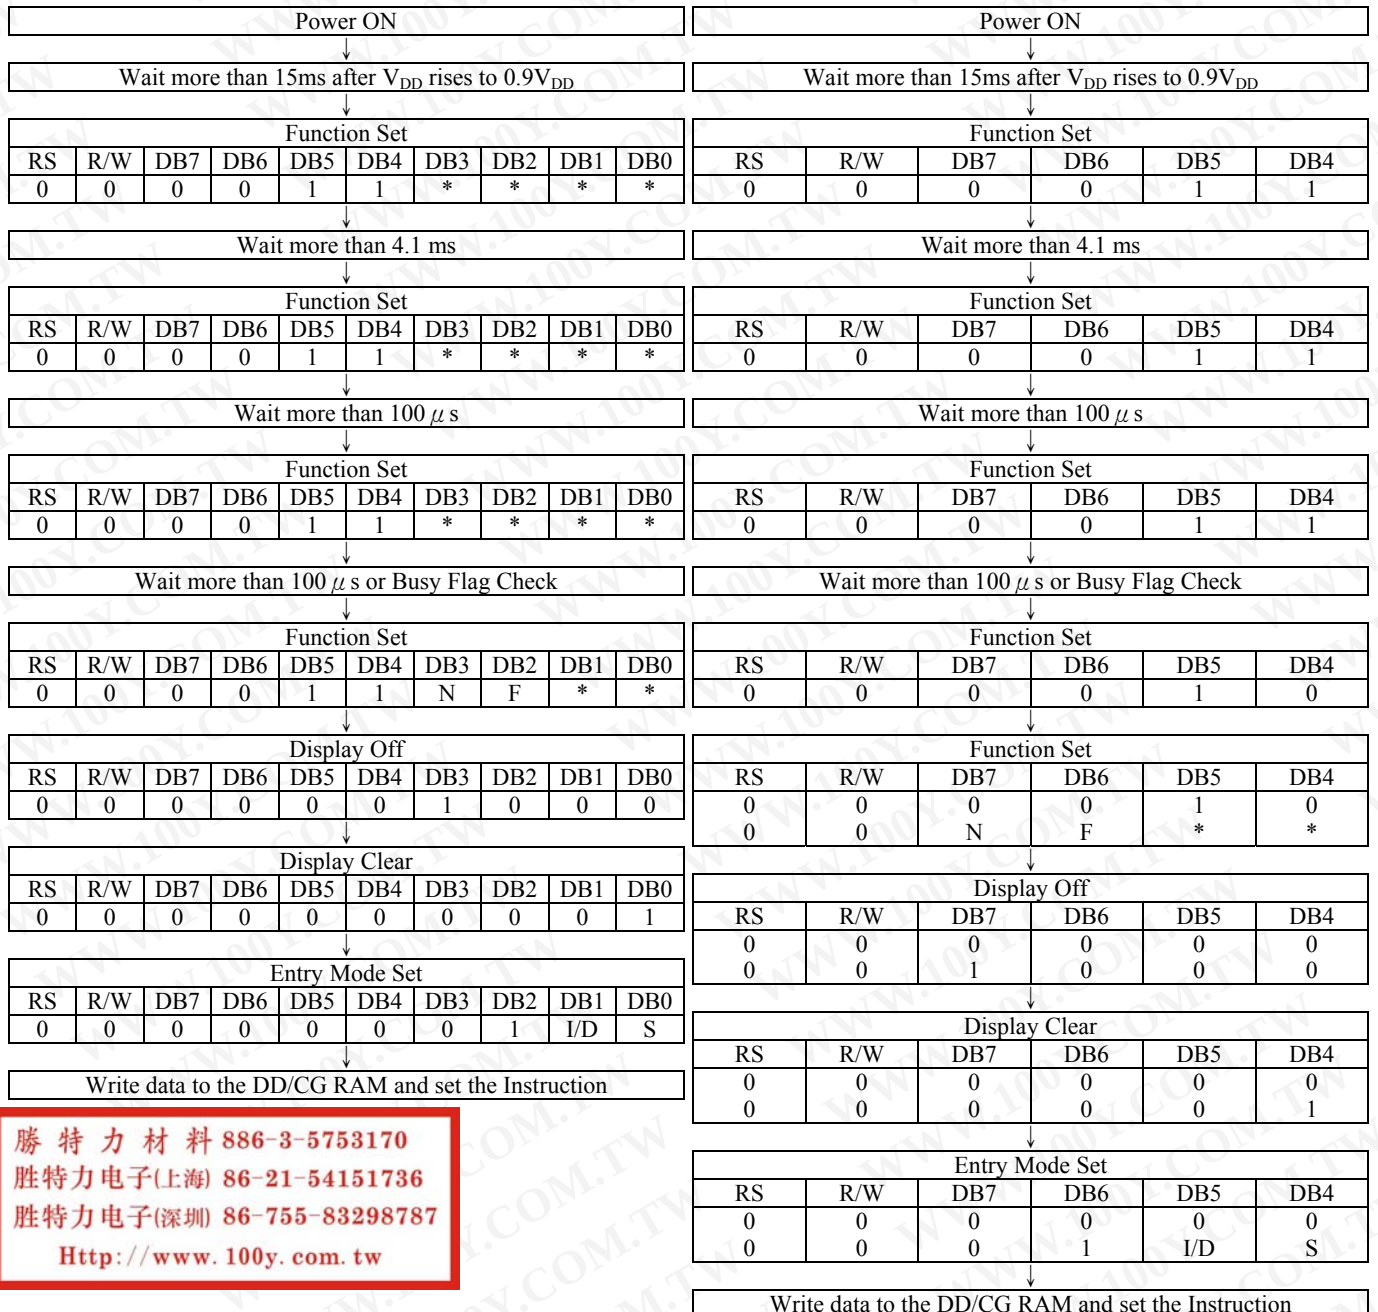

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

13. Instruction Set

FUNCTION	R S	R /W	D B 7	D B 6	D B 5	D B 4	D B 3	D B 2	D B 1	D B 0	DESCRIPTION	EXECU. TIME* (MAX.)
Clear Display	0	0	0	0	0	0	0	0	0	1	Clears entire display and returns the cursor to home position (address 0).	1.64ms
Return Home	0	0	0	0	0	0	0	0	1	x	Return the cursor to the home position. Also returns the display being shifted to the original position. DD RAM contents remain unchanged.	1.64ms
Entry mode set	0	0	0	0	0	0	0	1	I / D	S	Set cursor move direct and specifies display shift. These operations are performed during data rite/read. For normal operation, set S to zero. I/D=1: increment; 0: decrement; S=1: accompanies display shift when data is written, for normal operation, set to zero.	40 μ s
Display ON/OFF control	0	0	0	0	0	0	1	D	C	B	Set ON/OFF all display (D), cursor ON/OFF(C), and blink of cursor position character(B). D=1: ON display; 0:OFF display. C=1: ON cursor;0: OFF cursor. B=1: ON blink cursor; 0: OFF blink cursor.	40 μ s
Cursor or Display shift	0	0	0	0	0	1	S / C	R / L	x	x	Move the cursor and shift the display without changing DD RAM contents. S/C=1: Display shift; 0:Cursor move. R/L=1: shift to right; 0: shift to left.	40 μ s
Function Set	0	0	0	0	1	D L	N	F	x	x	Set the interface data length (DL). Number of display lines (N) and character font (F). DL=1: 8 bits; 0:4 bits. N=1: 2 lines; 0: 1 lines. F=1: 5x10 dots; 0: 5x7 dots.	40 μ s
Set CG RAM address	0	0	0	1	ACG						Set CG RAM address. CG RAM data is sent and received after this setting.	40 μ s
Set DD RAM address	0	0	1	ADD							Set DD RAM address. DD RAM data is sent and received after this setting	40 μ s
Read busy flag & address	0	1	B F	AC							Reads Busy Flag (BF) indicating internal operation is being performed and reads address counter contents. BF=1: internally operating. 0: can accept instruction	1 μ s
Write Data to CG/DDRAM	1	0	WRITE DATA								Write data into DD RAM or CG RAM.	40 μ s
Read Data for CG/DDRAM	1	1	READ DATA								Read data from DD RAM or CG RAM	40 μ s


14. User Font Patterns (CG RAM Character)

Character Code (DD RAM data)	CG RAM Address	Character Pattern (CG RAM data)
Hi 7 6 5 4 3 2 1 0 Lo	5 4 3 2 1 0	Hi 7 6 5 4 3 2 1 0 Lo
0000x000	000	x x x 1 1 1 1 0
	001	x x x 1 0 0 0 1
	010	x x x 1 0 0 0 1
	011	x x x 1 1 1 1 0
	100	x x x 1 0 1 0 0
	101	x x x 1 0 0 1 0
	110	x x x 1 0 0 0 1
	111	x x x 0 0 0 0 0
0000x001	000	x x x 1 0 0 0 1
	001	x x x 0 1 0 1 0
	010	x x x 1 1 1 1 1
	011	x x x 0 0 1 0 0
	100	x x x 1 1 1 1 1
	101	x x x 0 0 1 1 0
	110	x x x 0 0 1 0 0
	111	x x x 0 0 0 0 0
-----	-----	-----
0000x111	000	
	001	
	010	
	011	
	100	
	101	
	110	
	111	

16. Character Generator ROM Map

Higher 4 bit Lower 4 bit		CHARACTER PATTERN CHART (5x7DOTS+CURSOR)												
		0000	0010	0011	0100	0101	0110	0111	1010	1011	1100	1101	1110	1111
Lower 4-bit (D0-D3) of Character Code (Hexadecimal)	xxxx0000	CG RAM (1)												
	xxxx0001	(2)												
	xxxx0010	(3)												
	xxxx0011	(4)												
	xxxx0100	(5)												
	xxxx0101	(6)												
	xxxx0110	(7)												
	xxxx0111	(8)												
	xxxx1000	(1)												
	xxxx1001	(2)												
	xxxx1010	(3)												
	xxxx1011	(4)												
	xxxx1100	(5)												
	xxxx1101	(6)												
	xxxx1110	(7)												
	xxxx1111	(8)												

17. Reliability Condition

		TN Type		STN/FSTN Type	
		Normal Temp.	Wide Temp.	Normal Temp.	Wide Temp.
Viewing Angle	Horizontal (Φ 1/Φ 2)	±30°	±30°	±40°	±40°
	Vertical (Θ 2/Θ 1)	15° to 35°	15° to 35°	35° to 55°	35° to 55°
Operating Temperature		0 to 50℃	-20 to 70℃	0 to 50℃	*-20 to 70℃
Storage Temperature		-10 to 60℃	-30 to 80℃	-10 to 60℃	*-30 to 80℃
High Temperature (Power Off)		240 Hours @60℃	240 Hours @80℃	240 Hours @60℃	240 Hours @80℃
Low Temperature (Power Off)		240 Hours @-10℃	240 Hours @-30℃	240 Hours @-10℃	240 Hours @-30℃
High Temperature (Power On)		240 Hours @50℃	240 Hours @70℃	240 Hours @50℃	240 Hours @70℃
Low Temperature (Power On)		240 Hours @0℃	240 Hours @-20℃	240 Hours @0℃	240 Hours @-20℃
High Temperature & High Humidity (Power Off)		40℃/90%RH 240 Hours	40℃/90%RH 240 Hours	40℃/90%RH 240 Hours	40℃/90%RH 240 Hours
Thermal Shock 5 Cycle		A	60min@0℃	60min@-20℃	60min@0℃
		B	5min@25℃	5min@25℃	5min@25℃
		C	60min@50℃	60min@70℃	60min@50℃
LCD Lift (25℃/ 45%RH)		50,000 Hours	50,000 Hours	50,000 Hours	50,000 Hours

*Wide temp. version may not available for some products, Please consult our sales engineer or representatives.

18. Functional Test & Inspection Criteria

18.1 Sample plan


Sample plan according to MIL-STD-105D level 2, and acceptance/rejection criteria is.

Base on: Major defect: AQL 0.65 Minor defect: AQL 2.5

Inspection condition

Viewing distance for cosmetic inspection is 30cm with bare eyes, and under an environment of 800 lus (20W) light intensity. All direction for inspecting the sample should be within 45° against perpendicular line.

18.3 Definition of Inspection Zone in LCD

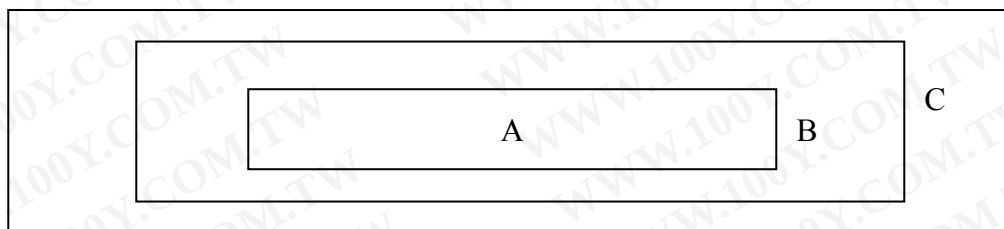

Zone A: Character / Digit area

Zone B: Viewing area except Zone A (Zone A + Zone B = minimum Viewing area)

Zone C: Outside viewing area (invisible area after assembly in customer's product)

Note: As a general rule, visual defects in Zone C are permissible, when it is no trouble for quality and assembly of customer's product.

18.4 Major Defect

All functional defects such as open (or missing segment), short, contrast differential, excess power consumption, smearing, leakage, etc. and overall outline dimension beyond the drawing. Are classified as major defects.

18.5 Inspection Parameters And Glass Pixel(偏光板和玻璃圖像檢驗)


NO	Polarizer(偏光板)	Criteria		
1	Black or White spots And Piercing (黑/白點和刺孔)	Dimension (面積)		Acceptable number (可接受數量)
		D<0.15		*
		0.15≤D≤0.2		4
		0.2≤D≤0.25		2
		D≤0.3		0
		D/面積=(Length/長度+Width/寬度)/2 => * : Disregard(忽略)		
2	Scratch (刮傷)	X(mm)	Y(mm)	Acceptable number (可接受數量)
		*	0.04≥W	*
		3.0≥L	0.06≥W	4
		2.0≥L	0.08≥W	2
		—	0.1≥W	0
		X : Length(長度) Y : Width(寬度) * : Disregard(忽略)		
3	Air Bubbles (between glass & polarizer) 氣泡(玻璃跟偏光板之間)	Dimension (面積)		Acceptable number (可接受數量)
		D≤0.15		*
		0.15<D≤0.25		2
		0.25<D		0
		* : Disregard (忽略)		

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

4


Glass of Pixel
(玻璃的圖像)

(1) Pixel shape (with Dent) / 圖像凹度

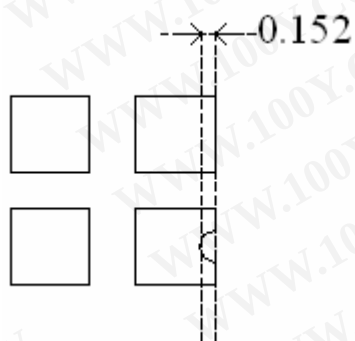


- Less than 0.152 mm is no counted
(小於 0.152mm 者不計)

(2) Pixel shape (with Projection) / 圖像凹度



- Should not be connected
next pixel
(點與點間不可先連接)


(3) Deformation / 變形



$$(X + Y) / 2 \leq 0.15\text{mm}$$

- Less than 0.1 mm is no counted
(小於 0.15mm 者不計)

(4) Deformation / 變形

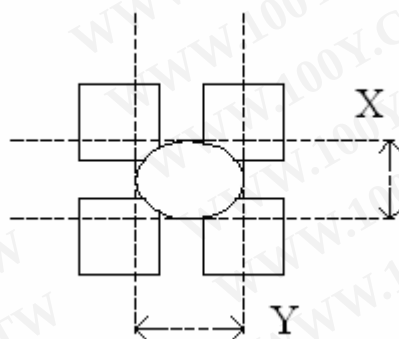

$$(X + Y) / 2 \leq 0.3\text{mm}$$

- Less than 0.3 mm is no counted
(小於 0.3mm 者不計)

19. Test (測試條件) – Normal Temperature (常溫)

No change no display and in operation under the following test condition.

(在不改變原先顯示下進行以下測試操作)


Conditions : Unless otherwise specified, test will be conducted under the following condition.

Temperature : $20 \pm 5^\circ\text{C}$

Humidity : $40 \pm 5\%\text{RH}$

Tests will be not conducted under functioning state.

(條件：除非其他特殊情況，否則測試將以溫度： $20 \pm 5^\circ\text{C}$ ，濕度： $40 \pm 5\%\text{RH}$ 為主)

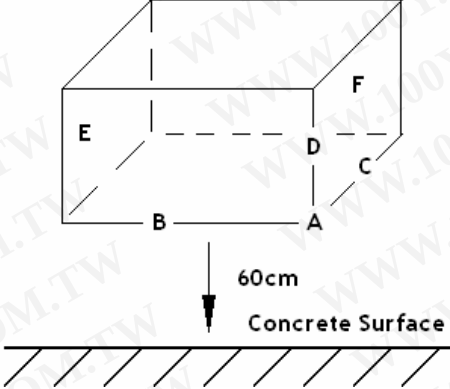NO	Parameter	Conditions	Notes
1	High Temperature Operating	$50^\circ\text{C} \pm 2^\circ\text{C}$, 96 hrs (operation state) (96 小時，溫度 $50^\circ\text{C} \pm 2^\circ\text{C}$ 電源開啟的操作情況下)	
2	Low Temperature Operating	$0^\circ\text{C} \pm 2^\circ\text{C}$, 96 hrs (operation state) (96 小時，溫度 $0^\circ\text{C} \pm 2^\circ\text{C}$ 電源開啟的操作情況下)	1
3	High Temperature Storage	$60^\circ\text{C} \pm 2^\circ\text{C}$, 96 hrs (96 小時，溫度 $60^\circ\text{C} \pm 2^\circ\text{C}$ 電源關閉靜態操作下)	2
4	Low Temperature Storage	$-10^\circ\text{C} \pm 2^\circ\text{C}$, 96 hrs (96 小時，溫度 $-10^\circ\text{C} \pm 2^\circ\text{C}$ 電源關閉靜態操作下)	1, 2
5	Damp Proof Test	$40^\circ\text{C} \pm 2^\circ\text{C}$, 85 ~ 90%RH, 96hr (96 小時，溫度： $40^\circ\text{C} \pm 2^\circ\text{C}$ ，濕度： $85 \sim 90\%\text{RH}$ 電源關閉靜態操作下)	1, 2
6	Vibration Test	Total fixed amplitude : 1.5 mm (完全固定輻射：1.5mm) Vibration Frequency : 10 ~ 55 Hz (震動頻率：10~55 Hz) One cycle 60 seconds to 3 directions of X, Y, Z for each 15 minutes (每一個循環 X, Y, Z 軸方向各做 60 秒，連續做 5 次，共計 15 分鐘)	3
7	Shock Test	To be measured after dropping from 60cm high on the concrete surface in packing state. (包裝材從 60 公分高的地方向地面落下)  Dropping method corner dropping (角落落方式) A corner : once Edge dropping (側邊落下) B, C, D edge : once Face dropping (表面落下) E, F, G face : once	

Note 1 : No dew condensation to be observed. (不要在“水氣凝結點”下觀察)

Note 2 : The function test shall be conducted after 4 hours storage at the normal

Temperature and humidity after removed from the test chamber

(從實驗室移出後，放在一般常溫 (溫度： 25°C ，濕度： $45\%\text{RH}$)，

且四小時後通電流或電壓，看它是否能正常動作)

Note 3 : Vibration test will be conducted to the product itself without putting it in a container.

(在震動測試下，產品本身不需容器即能自行傳導)

20. Test (測試條件) – Wide Temperature (廣溫)

No change no display and in operation under the following test condition.

(在不改變原先顯示下進行以下測試操作)


Conditions : Unless otherwise specified, test will be conducted under the following condition.

Temperature : $20 \pm 5^\circ\text{C}$

Humidity : $40 \pm 5\%\text{RH}$

Tests will be not conducted under functioning state.

(條件：除非其他特殊情況，否則測試將以溫度： $20 \pm 5^\circ\text{C}$ ，濕度： $40 \pm 5\%\text{RH}$ 為主)

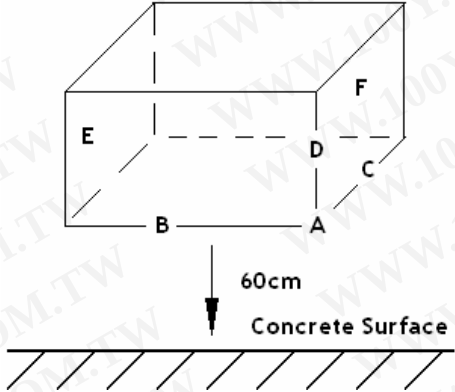NO	Parameter	Conditions	Notes
1	High Temperature Operating	$70^\circ\text{C} \pm 2^\circ\text{C}$, 96 hrs (operation state) (96 小時，溫度 $70^\circ\text{C} \pm 2^\circ\text{C}$ 電源開啟的操作情況下)	
2	Low Temperature Operating	$-20^\circ\text{C} \pm 2^\circ\text{C}$, 96 hrs (operation state) (96 小時，溫度 $-20^\circ\text{C} \pm 2^\circ\text{C}$ 電源開啟的操作情況下)	1
3	High Temperature Storage	$80^\circ\text{C} \pm 2^\circ\text{C}$, 96 hrs (96 小時，溫度 $80^\circ\text{C} \pm 2^\circ\text{C}$ 電源關閉靜態操作下)	2
4	Low Temperature Storage	$-30^\circ\text{C} \pm 2^\circ\text{C}$, 96 hrs (96 小時，溫度 $-30^\circ\text{C} \pm 2^\circ\text{C}$ 電源關閉靜態操作下)	1, 2
5	Damp Proof Test	$40^\circ\text{C} \pm 2^\circ\text{C}$, 85 ~ 90%RH , 96hr (96 小時，溫度： $40^\circ\text{C} \pm 2^\circ\text{C}$ ，濕度： $85 \sim 90\%\text{RH}$ 電源關閉靜態操作下)	1, 2
6	Vibration Test	Total fixed amplitude : 1.5 mm (完全固定輻射：1.5mm) Vibration Frequency : 10 ~ 55 Hz (震動頻率：10~55 Hz) One cycle 60 seconds to 3 directions of X, Y, Z for each 15 minutes (每一個循環 X, Y, Z 軸方向各做 60 秒，連續做 5 次，共計 15 分鐘)	3
7	Shock Test	To be measured after dropping from 60cm high on the concrete surface in packing state. (包裝材從 60 公分高的地方向地面落下)  Dropping method corner dropping (角落落方式) A corner : once Edge dropping (側邊落下) B, C, D edge : once Face dropping (表面落下) E, F, G face : once	

Note 1 : No dew condensation to be observed. (不要在“水氣凝結點”下觀察)

Note 2 : The function test shall be conducted after 4 hours storage at the normal

Temperature and humidity after removed from the test chamber

(從實驗室移出後，放在一般常溫 (溫度： 25°C ，濕度： $45\%\text{RH}$)，

且四小時後通電流或電壓，看它是否能正常動作)

Note 3 : Vibration test will be conducted to the product itself without putting it in a container.

(在震動測試下，產品本身不需容器即能自行傳導)

21. Precautions Against Product Handling [產品使用注意事項]：

The following precautions will guide you in handling our product correctly.

[下列警戒引導正確地使用產品]

21.1 Care of the LCD module against static electricity discharge. [LCD 模組靜電注意事項]

21.1.1 When working with the module, be sure to ground your body and any electrical equipment you may be using. We strongly recommend the use of anti static mats (made of rubber), to protect work tables against the hazards of electrical shock.

[操作模組時，避免操作者身體接地及任何造成靜電的設備同時使用，強烈建議(橡膠製)抗靜電墊的使用，以免工作台面遭受到電氣干擾]

21.1.2 Slowly and carefully remove the protective film from the LCD module, since this operation can generate static electricity.

[緩慢小心地移除 LCD 模組上的保護膜，以防靜電產生]

21.1.3 Avoid the use of work clothing made of synthetic fibers. We recommend cotton clothing or other conductivity-treated fibers.

[避免穿著人造合成的工作服，建議棉質或是有傳導性的纖維質料]

21.2 Liquid crystal display devices (LCD devices) [液晶螢幕顯示器的組成]

21.2.1 The polarizer adhering to the surface of the LCD is made of a soft material.

Guard against scratching it. [偏光板是軟性原料製成，請勿刮傷]

21.2.2 The LCD device panel used in the LCM is made of plate glass. Avoid any strong mechanical shock. Should the glass break handle it with care.

[模組使用的玻璃為平面玻璃，避免任何強烈的機械撞擊，且觸碰時請小心]

21.3 When the LCD module alone must be stored form long periods of time

[當 LCD 模組須長時間存放時]

21.3.1 Protect the modules from excessive external forces. [避免外力壓迫]

21.3.2 Protect the modules from high temperature and humidity. [避免處於高溫高濕下]

21.3.3 Keep the modules out of direct sunlight or direct exposure to ultraviolet rays.

[遠離陽光曝曬或直接曝露在紫外線下]

21.4 Use the module with a power supply that is equipped with an overcurrent protector circuit, since the module is not provided with this protective feature.

[因為模組本身沒有防護，所以模組的供應器應配有過高電流的保護迴路]

21.5 Do not ingest the LCD fluid itself should it leak out of a damaged LCD module. Should hands or clothing come in contact with LCD fluid, wash immediately with soap.

[LCD 破裂液晶外漏時，切勿食下液晶；若手或衣服接觸到液晶，請立刻用肥皂清洗]

21.6 Conductivity is not guaranteed for models that use metal holders where solder connections between the metal holder and the PCB are not used. Please contact us to discuss appropriate ways to assure conductivity.

[當金屬框並沒焊接於 PCB 板上時，無法保證使用金屬框是具有傳導性，請連絡我們商討適當方式傳導]

21.7 For models which use CCFL [CCFL 的模組]:

21.7.1 High voltage of 1000V or greater is applied to the CCFL cable connector area.

[CCFL 排線連接器用於 1000V 以上的高電壓]

21.7.2 Protect CCFL cables from rubbing against the unit and thus causing the wire jacket to become worn. [CCFL 排線必須有保護 CCFL 與模組磨擦，以防 CCFL 外殼受到損害]

21.7.3 The use of CCFLs for extended periods of time at low temperatures will significantly shorten their service life. [長時間低溫使用 CCFL 會明顯縮減其使用壽命]

21.8 For models which use touch panels [觸控式面板模組]:

- 21.8.1 Do not stack up modules since they can be damaged by components on neighboring modules.
[勿堆疊模組以防損壞]
- 21.8.2 Do not place heavy objects on top of the product. This could cause glass breakage.
[勿將重物放置在產品上，會導致玻璃破損]

21.9 For models which use COG & TAB [COG 及 TAB 模組]:

- 21.9.1 The mechanical strength of the product is low since the IC chip is faces out unprotected from the rear. Be sure to protect the rear of the IC chip from external forces.
[由於 IC 晶片表面無防護，所以抗壓力有限，須加強保護以防外力]
- 21.9.2 Given the fact that the rear of the IC chip is left exposed, in order to protect the unit from electrical damage, avoid installation configurations in which the rear of the IC chip runs the risk of making any electrical contact.
[勿暴露 IC 晶片以防電氣干擾，且避免安裝 IC 時有任何電子接觸]

21.10 Models which use flexible cable, heat seal, or TAB [加有軟排線、熱封條或 TAB 的模組]:

- 21.10.1 In order to maintain reliability, do not touch or hold by the connector area.
[以維持產品信賴度，請勿觸碰或握住連接器]
- 21.10.2 Avoid any bending, pulling, or other excessive force, which can result in broken connections. [避免彎曲、拉扯或過度力量，會造成連接器損壞]

21.11 In case of acrylic plate is attached to front side of LCD panel, cloudiness (very small cracks) can occur on acrylic plate, being influenced by some components generated from polarizer film. Please check and evaluate those acrylic materials carefully before use.

[貼在 LCD 玻璃前面的壓克力板若有模糊情況(微小裂縫)，即會影響偏光板；使用前請仔細確認壓克力材質]

21.12 In case of buffer material such as cushion/gasket is assembled into LCD module, it may have an adverse effect on connecting parts (LCD panel-TCP/ HEAT SEAL/ FPC, PCB-TCP/HEAT SEAL/FPC, TCP-HEAT SEAL, TCP-FPC, HEAT SEAL-FPC) depending on its materials. Please check and evaluate these materials carefully before use.

[緩衝原料像是減震墊/襯墊，或許會對連接器(LCD panel-TCP/ HEAT SEAL/ FPC, PCB-TCP/HEAT SEAL/FPC, TCP-HEAT SEAL, TCP-FPC, HEAT SEAL-FPC)造成反效果，使用前請仔細確認材料]

22. Warranty [保證]:

This product has been manufactured to your company's specifications as a part for use in your company's general electronic products. It is guaranteed to perform according to delivery specifications. For any other use apart from general electronic equipment, we cannot take responsibility if the product is used in medical devices, nuclear power control equipment, aerospace equipment, fire and security systems, or any other applications in which there is a direct risk to human life and where extremely high levels of reliability are required. If the product is to be used in any of the above applications, we will need to enter into a separate product liability agreement.

[此產品的製造是依照客戶的規格，被使用於客戶的一般電子產品上，保證產品製作根據出貨的規格，若產品的使用不是在一般電子設備，而組裝於下列產品上則無法受理（如醫療產品、核心電源控制設備、航空設備、防火及保全系統，或任何相關儀器會直接影響人類生命等），若模組使用於上述的儀器，則需商討各別產品責任義務的協定]

- 22.1 We cannot accept responsibility for any defect, which may arise after the application of strong external force to the product.
[不受理因強大外力衝擊造成產品的缺陷]
- 22.2 We cannot accept responsibility for any defect, which may arise from additional manufacturing of the product (including disassembly and reassembly), after product delivery.
[不受理產品出貨後，因額外加工(包含拆裝及重新封包)造成的缺陷]
- 22.3 We cannot accept responsibility for any defect, which may arise due to the application of static electricity after the product, has passed your company's acceptance inspection procedures.
[不受理通過貴公司檢驗流程後，由於靜電造成產品的缺陷]
- 22.4 We cannot accept responsibility for intellectual property of a third party, which may arise through the application of our product to your assembly with exception to those issues relating directly to the structure or method of manufacturing of our product.
[不受理因在客戶產品生產線端所產生的第三人智慧財產權責任，除非與我司生產製造方法有直接關係的問題]
- 22.5 When the product is in CCFL models, CCFL service life and brightness will vary according to the performance of the inverter used, leaks, etc. We cannot accept responsibility for product performance, reliability, or defect, which may arise.
[產品是 CCFL 模組時，CCFL 的壽命及亮度將取決於連接器的性能、漏電量等；無法受理因 CCFL 造成產品性能的缺陷]
- 22.6 SDEC will not be held responsible for any quality guarantee issue for defect products longer than 1(one) year from SDEC production which ever comes later.
[出廠超過一年的瑕疵品，任何品質擔保則不受理]

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)