



NSL-19M51

Ceramic Package


102082 REV 5

Description

The NSL-19M51 is a CdS photoconductive cell on a TO-18 ceramic plastic encapsulated for moisture resistance.

Absolute Maximum Ratings

Operating & Storage Temp -60°C to +75°C
 Power Dissipation @ 25°C (1) 50 mW
 Voltage (peak AC or DC) 100 V

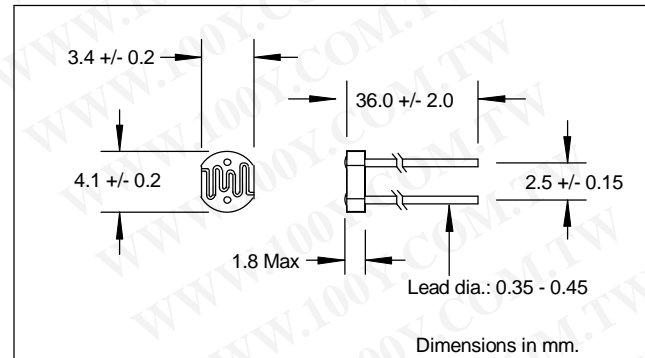

Electrical Characteristics (T_A=25°C, source at 2854°K)(2)

Symbol	Parameter	Min	Typ	Max.	Units	Test Conditions
R _L	Light Resistance	20		100	KΩ	10 lux
			5		KΩ	100 lux
R _D	Dark Resistance	20			MΩ	10 sec after removal of light
λ _p	Peak spectral wavelength		550		nm	
Γ	Gamma		0.7			1 - 10 Lux
Γ	Gamma		0.7			10 - 100 Lux

Specifications subject to change without notice

Notes: (1) derate linearly to 0 at 75°C

(2) cells to be light adapted at 30 to 50 Ftc for 16 hrs minimum prior to electrical tests

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

5200 St. Patrick St., Montreal
 Que., H4E 4N9, Canada
 Tel: 514-768-8000
 Fax: 514-768-8889