
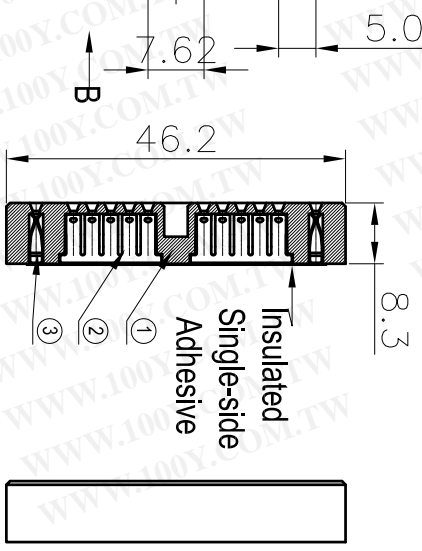


REVISION RECORD			
REV.	CONTENT	MOD.	DATE
A	New Publish		

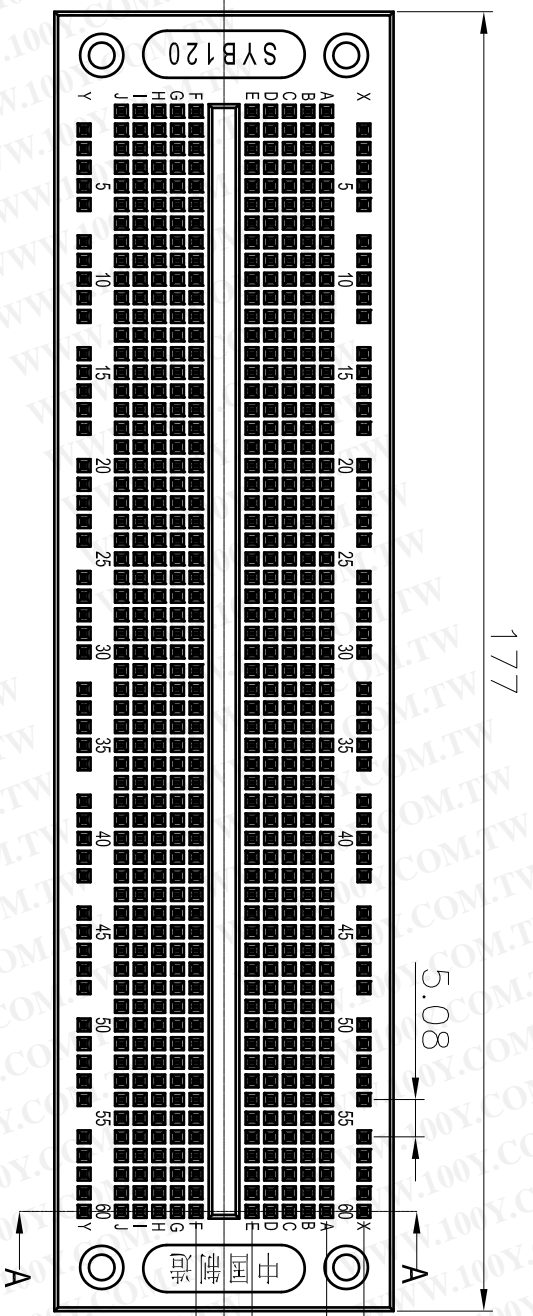

- Notes:
1. Pitch: 2.54mm
 2. 1 Terminal Strip: 700 Tie-point
 3. Rated voltage/current: 3 0 0 V / 3 - 5 A
 4. Insulation resistance: 500MΩ/DC500V
 5. Withstanding voltage: AC1000V/Min
 6. Wire range: 29~2 0 AWG
 7. Temp. Range: -25° c~+80° c
 8. Undimensioned Tolerances: Strip length: 7-8mm

TOLERANCES EXCEPT AS NOTED

	linear dimension	fillet	chamfer	short angle sid	≡	—	□	//	⊥
variable range	6 to 6	30 to 30	120 to 120	480 to 480	all to 6	6 to 6	10 to 10	50 to 50	120 to 120
tolerance	±0.1	±0.2	±0.3	±0.5	±0.9	±0.2	±0.5	±1	1°
	6 to 6	30 to 30	120 to 120	480 to 480	all to 6	6 to 6	10 to 10	50 to 50	120 to 120
	±0.1	±0.2	±0.3	±0.5	±0.9	±0.2	±0.5	±1	1°
	6 to 6	30 to 30	120 to 120	480 to 480	all to 6	6 to 6	10 to 10	50 to 50	120 to 120
	±0.1	±0.2	±0.3	±0.5	±0.9	±0.2	±0.5	±1	1°

3	BB-D-126/128 Term Clamp	7001B00070	2	Phosphor Bronze	Ni Plated
2	BB-T-126/128 Clamp	7001B00010	120	Phosphor Bronze	Ni Plated
1	SYB-120-Body	7037AYY01A	1	ABS	UL 94V-2
NO.	NAME OF PART	NO. OF PART	QTY	MATERIAL	NOTES
DES.	YYS	DATE	09/03/11	UNITS	mm
CHK.		DATE		SIZE	A4
APP.		DATE		SCALE	1:1
				DWG NO.	SP-2-7037001
					SYB-120-YY
					Terminal Strip



CIXI WANJIE ELECTRONIC CO., LTD