


18W (3 ~ 24V) A C - D C SWITCHING ADAPTOR

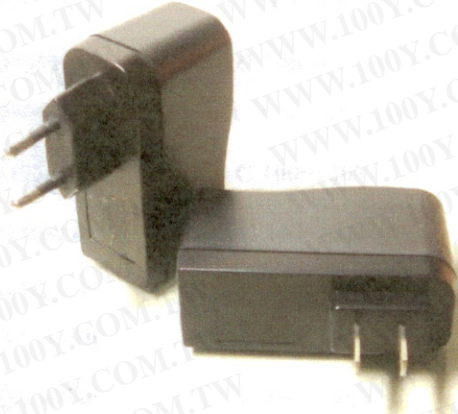

FEATURE

- COMPACT SIZE , LIGHT WEIGHT
- OVER LOAD PROTECTION
- DC OUTPUT PLUG OPTION
- SHORT CIRCUIT PROTECTION
- LOW COST / HIGH RELIABILITY
- 100% FULL LOAD BURN-IN TEST
- 1 YEAR WARRANTY

ELECTRICAL SPECIFICATIONS

INPUT

INPUT RANGE----- 100 - 240VAC(FULL RANGE) , 50 - 60HZ
 INPUT CURRENT (RMS)--- 400mA @ 90VAC; 250mA @ 260VAC MAX..
 EFFICIENCY ----- >70% @ FULL LOAD, 115VAC (DC CONVERSION)

OUTPUT

VOLTAGE (VO) ----- +3V ~ +24V
 VOLTAGE REGULATION ----- ±8% @ CONSTANT VOLTAGE MODE
 CURRENT LIMIT ----- ±8% @ CONSTANT CURRENT MODE
 MAXIMUM POWER (PO) ----- 18W
 LENGTH OF OUTPUT CABLE ----- 150 CM , AWG 20 X 2C
 STANDARD PLUG OF DC OUTPUT ----- AS YOUR INSTRUCTION

SAFETY

CE FCC TUV UL

ENVIRONMENTAL

OPERATING TEMPERATURE----- 0°C TO +50 °C AMBIENT
 STORAGE TEMPERATURE ----- -10 °C TO +70 °C
 HUMIDITY ----- 20% ~ 90% RH

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

MODEL	OUTPUT RATING	TOL.	R&N	P _{MAX}
JLD-05030	5V/3.0A	5%	50mV	15W
JLD-06030	6V/3.0A	5%	60mv	18W
JLD-09020	9V/2.0A	5%	90mV	18W
JLD-12015	12V/1.5A	3%	120mV	18W
JLD-15012	15V/1.2A	3%	150mV	18W
JLD-18010	18V/1.0A	3%	180mV	18W
JLD-24007	24V/0.75A	3%	240mV	18W

特殊規格可訂製