



■ Features :

- Universal AC input / Full range
- 3 pole AC inlet IEC320-C14
- High efficiency up to 91%
- Low leakage current <100 μ A
- Protections: Short circuit / Overload / Over voltage/ Over temperature
- Fully enclosed plastic case
- Medical safety approved (MOPP level)
- Class I power (with earth pin)
- LED indicator for power on
- No load power consumption<0.1W
- ErP step2 compliant (level V)
- Meet EISA 2007 (Energy Independence and Security Act)
- 3 years warranty




SPECIFICATION

ORDER NO.	GSM60A05-P1J	GSM60A07-P1J	GSM60A09-P1J	GSM60A12-P1J	GSM60A15-P1J	GSM60A18-P1J	GSM60A24-P1J	GSM60A48-P1J																																																																																																				
OUTPUT	<table border="1"> <tr> <td>SAFETY MODEL NO.</td> <td>GSM60A05</td> <td>GSM60A07</td> <td>GSM60A09</td> <td>GSM60A12</td> <td>GSM60A15</td> <td>GSM60A18</td> <td>GSM60A24</td> <td>GSM60A48</td> </tr> <tr> <td>DC VOLTAGE <small>Note.2</small></td> <td>5V</td> <td>7.5V</td> <td>9V</td> <td>12V</td> <td>15V</td> <td>18V</td> <td>24V</td> <td>48V</td> </tr> <tr> <td>RATED CURRENT</td> <td>6A</td> <td>6A</td> <td>6A</td> <td>5A</td> <td>4A</td> <td>3.33A</td> <td>2.5A</td> <td>1.25A</td> </tr> <tr> <td>CURRENT RANGE</td> <td>0.1 ~ 6A</td> <td>0.1 ~ 6A</td> <td>0.1 ~ 6A</td> <td>0.1 ~ 5A</td> <td>0.1 ~ 4A</td> <td>0.1 ~ 3.33A</td> <td>0.1 ~ 2.5A</td> <td>0.1 ~ 1.25A</td> </tr> <tr> <td>RATED POWER (max.)</td> <td>30W</td> <td>45W</td> <td>54W</td> <td>60W</td> <td>60W</td> <td>60W</td> <td>60W</td> <td>60W</td> </tr> <tr> <td>RIPPLE & NOISE (max.) <small>Note.3</small></td> <td>100mVp-p</td> <td>100mVp-p</td> <td>100mVp-p</td> <td>100mVp-p</td> <td>100mVp-p</td> <td>150mVp-p</td> <td>180mVp-p</td> <td>240mVp-p</td> </tr> <tr> <td>VOLTAGE TOLERANCE <small>Note.4</small></td> <td>± 5.0%</td> <td>± 5.0%</td> <td>± 5.0%</td> <td>± 3.0%</td> <td>± 3.0%</td> <td>± 3.0%</td> <td>± 3.0%</td> <td>± 2.5%</td> </tr> <tr> <td>LINE REGULATION <small>Note.5</small></td> <td>± 1.0%</td> <td>± 1.0%</td> <td>± 1.0%</td> <td>± 1.0%</td> <td>± 1.0%</td> <td>± 1.0%</td> <td>± 1.0%</td> <td>± 1.0%</td> </tr> <tr> <td>LOAD REGULATION</td> <td>± 5.0%</td> <td>± 5.0%</td> <td>± 5.0%</td> <td>± 3.0%</td> <td>± 3.0%</td> <td>± 3.0%</td> <td>± 3.0%</td> <td>± 2.5%</td> </tr> <tr> <td>SETUP, RISE TIME <small>Note.7</small></td> <td colspan="8">1000ms, 30ms / 230VAC 1500ms, 30ms / 115VAC at full load</td> </tr> <tr> <td>HOLD UP TIME (Typ.)</td> <td colspan="8">50ms / 230VAC 15ms / 115VAC at full load</td> </tr> </table>									SAFETY MODEL NO.	GSM60A05	GSM60A07	GSM60A09	GSM60A12	GSM60A15	GSM60A18	GSM60A24	GSM60A48	DC VOLTAGE <small>Note.2</small>	5V	7.5V	9V	12V	15V	18V	24V	48V	RATED CURRENT	6A	6A	6A	5A	4A	3.33A	2.5A	1.25A	CURRENT RANGE	0.1 ~ 6A	0.1 ~ 6A	0.1 ~ 6A	0.1 ~ 5A	0.1 ~ 4A	0.1 ~ 3.33A	0.1 ~ 2.5A	0.1 ~ 1.25A	RATED POWER (max.)	30W	45W	54W	60W	60W	60W	60W	60W	RIPPLE & NOISE (max.) <small>Note.3</small>	100mVp-p	100mVp-p	100mVp-p	100mVp-p	100mVp-p	150mVp-p	180mVp-p	240mVp-p	VOLTAGE TOLERANCE <small>Note.4</small>	± 5.0%	± 5.0%	± 5.0%	± 3.0%	± 3.0%	± 3.0%	± 3.0%	± 2.5%	LINE REGULATION <small>Note.5</small>	± 1.0%	± 1.0%	± 1.0%	± 1.0%	± 1.0%	± 1.0%	± 1.0%	± 1.0%	LOAD REGULATION	± 5.0%	± 5.0%	± 5.0%	± 3.0%	± 3.0%	± 3.0%	± 3.0%	± 2.5%	SETUP, RISE TIME <small>Note.7</small>	1000ms, 30ms / 230VAC 1500ms, 30ms / 115VAC at full load								HOLD UP TIME (Typ.)	50ms / 230VAC 15ms / 115VAC at full load							
SAFETY MODEL NO.	GSM60A05	GSM60A07	GSM60A09	GSM60A12	GSM60A15	GSM60A18	GSM60A24	GSM60A48																																																																																																				
DC VOLTAGE <small>Note.2</small>	5V	7.5V	9V	12V	15V	18V	24V	48V																																																																																																				
RATED CURRENT	6A	6A	6A	5A	4A	3.33A	2.5A	1.25A																																																																																																				
CURRENT RANGE	0.1 ~ 6A	0.1 ~ 6A	0.1 ~ 6A	0.1 ~ 5A	0.1 ~ 4A	0.1 ~ 3.33A	0.1 ~ 2.5A	0.1 ~ 1.25A																																																																																																				
RATED POWER (max.)	30W	45W	54W	60W	60W	60W	60W	60W																																																																																																				
RIPPLE & NOISE (max.) <small>Note.3</small>	100mVp-p	100mVp-p	100mVp-p	100mVp-p	100mVp-p	150mVp-p	180mVp-p	240mVp-p																																																																																																				
VOLTAGE TOLERANCE <small>Note.4</small>	± 5.0%	± 5.0%	± 5.0%	± 3.0%	± 3.0%	± 3.0%	± 3.0%	± 2.5%																																																																																																				
LINE REGULATION <small>Note.5</small>	± 1.0%	± 1.0%	± 1.0%	± 1.0%	± 1.0%	± 1.0%	± 1.0%	± 1.0%																																																																																																				
LOAD REGULATION	± 5.0%	± 5.0%	± 5.0%	± 3.0%	± 3.0%	± 3.0%	± 3.0%	± 2.5%																																																																																																				
SETUP, RISE TIME <small>Note.7</small>	1000ms, 30ms / 230VAC 1500ms, 30ms / 115VAC at full load																																																																																																											
HOLD UP TIME (Typ.)	50ms / 230VAC 15ms / 115VAC at full load																																																																																																											
INPUT	<table border="1"> <tr> <td>VOLTAGE RANGE</td> <td colspan="8">80 ~ 264VAC 113 ~ 370VDC</td> </tr> <tr> <td>FREQUENCY RANGE</td> <td colspan="8">47 ~ 63Hz</td> </tr> <tr> <td>EFFICIENCY (Typ.)</td> <td>81.5%</td> <td>86%</td> <td>87.5%</td> <td>88%</td> <td>88.5%</td> <td>89%</td> <td>90%</td> <td>91%</td> </tr> <tr> <td>AC CURRENT (Typ.)</td> <td colspan="8">1.4A / 115VAC 1A / 230VAC</td> </tr> <tr> <td>INRUSH CURRENT (Typ.)</td> <td colspan="8">65A / 230VAC</td> </tr> <tr> <td>LEAKAGE CURRENT(max.)</td> <td colspan="8">Earth leakage current < 100μA/264VAC , Touch current < 100μA/264VAC</td> </tr> </table>									VOLTAGE RANGE	80 ~ 264VAC 113 ~ 370VDC								FREQUENCY RANGE	47 ~ 63Hz								EFFICIENCY (Typ.)	81.5%	86%	87.5%	88%	88.5%	89%	90%	91%	AC CURRENT (Typ.)	1.4A / 115VAC 1A / 230VAC								INRUSH CURRENT (Typ.)	65A / 230VAC								LEAKAGE CURRENT(max.)	Earth leakage current < 100 μ A/264VAC , Touch current < 100 μ A/264VAC																																																				
VOLTAGE RANGE	80 ~ 264VAC 113 ~ 370VDC																																																																																																											
FREQUENCY RANGE	47 ~ 63Hz																																																																																																											
EFFICIENCY (Typ.)	81.5%	86%	87.5%	88%	88.5%	89%	90%	91%																																																																																																				
AC CURRENT (Typ.)	1.4A / 115VAC 1A / 230VAC																																																																																																											
INRUSH CURRENT (Typ.)	65A / 230VAC																																																																																																											
LEAKAGE CURRENT(max.)	Earth leakage current < 100 μ A/264VAC , Touch current < 100 μ A/264VAC																																																																																																											
PROTECTION	<table border="1"> <tr> <td>OVERLOAD</td> <td colspan="8">105 ~ 160% rated output power Protection type : Hiccup mode, recovers automatically after fault condition is removed</td> </tr> <tr> <td>OVER VOLTAGE</td> <td>5.25 ~ 6.75V</td> <td>7.88 ~ 10.13V</td> <td>9.45 ~ 12.15V</td> <td>12.6 ~ 16.2V</td> <td>15.75 ~ 20.25V</td> <td>18.9 ~ 24.3V</td> <td>25.2 ~ 32.4V</td> <td>50.4 ~ 64.8V</td> </tr> <tr> <td></td> <td colspan="8">Protection type : Shut down o/p voltage, re-power on to recover</td> </tr> <tr> <td>OVER TEMPERATURE</td> <td colspan="8">RTH2 > 70°C Protection type : Shut down o/p voltage, re-power on to recover</td> </tr> </table>									OVERLOAD	105 ~ 160% rated output power Protection type : Hiccup mode, recovers automatically after fault condition is removed								OVER VOLTAGE	5.25 ~ 6.75V	7.88 ~ 10.13V	9.45 ~ 12.15V	12.6 ~ 16.2V	15.75 ~ 20.25V	18.9 ~ 24.3V	25.2 ~ 32.4V	50.4 ~ 64.8V		Protection type : Shut down o/p voltage, re-power on to recover								OVER TEMPERATURE	RTH2 > 70°C Protection type : Shut down o/p voltage, re-power on to recover																																																																						
OVERLOAD	105 ~ 160% rated output power Protection type : Hiccup mode, recovers automatically after fault condition is removed																																																																																																											
OVER VOLTAGE	5.25 ~ 6.75V	7.88 ~ 10.13V	9.45 ~ 12.15V	12.6 ~ 16.2V	15.75 ~ 20.25V	18.9 ~ 24.3V	25.2 ~ 32.4V	50.4 ~ 64.8V																																																																																																				
	Protection type : Shut down o/p voltage, re-power on to recover																																																																																																											
OVER TEMPERATURE	RTH2 > 70°C Protection type : Shut down o/p voltage, re-power on to recover																																																																																																											
ENVIRONMENT	<table border="1"> <tr> <td>WORKING TEMP.</td> <td colspan="8">-30 ~ +60°C(Refer to "Derating Curve")</td> </tr> <tr> <td>WORKING HUMIDITY</td> <td colspan="8">20% ~ 90% RH non-condensing</td> </tr> <tr> <td>STORAGE TEMP., HUMIDITY</td> <td colspan="8">-40 ~ +85°C, 10 ~ 95% RH</td> </tr> <tr> <td>TEMP. COEFFICIENT</td> <td colspan="8">±0.03% / °C (0 ~ 50°C)</td> </tr> <tr> <td>VIBRATION</td> <td colspan="8">10 ~ 500Hz, 2G 10min./1cycle, period for 60min. each along X, Y, Z axes</td> </tr> </table>									WORKING TEMP.	-30 ~ +60°C(Refer to "Derating Curve")								WORKING HUMIDITY	20% ~ 90% RH non-condensing								STORAGE TEMP., HUMIDITY	-40 ~ +85°C, 10 ~ 95% RH								TEMP. COEFFICIENT	±0.03% / °C (0 ~ 50°C)								VIBRATION	10 ~ 500Hz, 2G 10min./1cycle, period for 60min. each along X, Y, Z axes																																																													
WORKING TEMP.	-30 ~ +60°C(Refer to "Derating Curve")																																																																																																											
WORKING HUMIDITY	20% ~ 90% RH non-condensing																																																																																																											
STORAGE TEMP., HUMIDITY	-40 ~ +85°C, 10 ~ 95% RH																																																																																																											
TEMP. COEFFICIENT	±0.03% / °C (0 ~ 50°C)																																																																																																											
VIBRATION	10 ~ 500Hz, 2G 10min./1cycle, period for 60min. each along X, Y, Z axes																																																																																																											
SAFETY & EMC (Note. 6)	<table border="1"> <tr> <td>SAFETY STANDARDS</td> <td colspan="8">ANSI/AAMI ES60601-1 / 60601-1-11, TUV EN60601-1 / 60601-1-11 approved</td> </tr> <tr> <td>WITHSTAND VOLTAGE</td> <td colspan="8">I/P-O/P:4KVAC I/P-FG:2KVAC O/P-FG:SHORT</td> </tr> <tr> <td>ISOLATION RESISTANCE</td> <td colspan="8">I/P-O/P, I/P-FG:100M Ohms / 500VDC / 25°C/ 70% RH</td> </tr> <tr> <td>EMC EMISSION</td> <td colspan="8">Compliance to EN55011(CISPR11) class B, EN61000-3-2,3, FCC PART 15 class B</td> </tr> <tr> <td>EMC IMMUNITY</td> <td colspan="8">Compliance to EN61000-4-2,3,4,5,6,8,11, EN55024, EN60601-1-2, EN61204-3 medical level, criteria A</td> </tr> </table>									SAFETY STANDARDS	ANSI/AAMI ES60601-1 / 60601-1-11, TUV EN60601-1 / 60601-1-11 approved								WITHSTAND VOLTAGE	I/P-O/P:4KVAC I/P-FG:2KVAC O/P-FG:SHORT								ISOLATION RESISTANCE	I/P-O/P, I/P-FG:100M Ohms / 500VDC / 25°C/ 70% RH								EMC EMISSION	Compliance to EN55011(CISPR11) class B, EN61000-3-2,3, FCC PART 15 class B								EMC IMMUNITY	Compliance to EN61000-4-2,3,4,5,6,8,11, EN55024, EN60601-1-2, EN61204-3 medical level, criteria A																																																													
SAFETY STANDARDS	ANSI/AAMI ES60601-1 / 60601-1-11, TUV EN60601-1 / 60601-1-11 approved																																																																																																											
WITHSTAND VOLTAGE	I/P-O/P:4KVAC I/P-FG:2KVAC O/P-FG:SHORT																																																																																																											
ISOLATION RESISTANCE	I/P-O/P, I/P-FG:100M Ohms / 500VDC / 25°C/ 70% RH																																																																																																											
EMC EMISSION	Compliance to EN55011(CISPR11) class B, EN61000-3-2,3, FCC PART 15 class B																																																																																																											
EMC IMMUNITY	Compliance to EN61000-4-2,3,4,5,6,8,11, EN55024, EN60601-1-2, EN61204-3 medical level, criteria A																																																																																																											
OTHERS	<table border="1"> <tr> <td>MTBF</td> <td colspan="8">720K hrs min. MIL-HDBK-217F(25°C)</td> </tr> <tr> <td>DIMENSION</td> <td colspan="8">125*50*31.5mm (L*W*H)</td> </tr> <tr> <td>PACKING</td> <td colspan="8">0.32Kg; 40pcs/ 13.8Kg/1.05CUFT</td> </tr> </table>									MTBF	720K hrs min. MIL-HDBK-217F(25°C)								DIMENSION	125*50*31.5mm (L*W*H)								PACKING	0.32Kg; 40pcs/ 13.8Kg/1.05CUFT																																																																															
MTBF	720K hrs min. MIL-HDBK-217F(25°C)																																																																																																											
DIMENSION	125*50*31.5mm (L*W*H)																																																																																																											
PACKING	0.32Kg; 40pcs/ 13.8Kg/1.05CUFT																																																																																																											
CONNECTOR	<table border="1"> <tr> <td>PLUG</td> <td colspan="8">Standard type P1J: 2.1ϕ 5.5ϕ 11mm, tuning fork type, center positive for stock ; Other type available by customer requested</td> </tr> <tr> <td>CABLE</td> <td colspan="8">See page 2 ; Other type available by customer requested</td> </tr> </table>									PLUG	Standard type P1J: 2.1 ϕ 5.5 ϕ 11mm, tuning fork type, center positive for stock ; Other type available by customer requested								CABLE	See page 2 ; Other type available by customer requested																																																																																								
PLUG	Standard type P1J: 2.1 ϕ 5.5 ϕ 11mm, tuning fork type, center positive for stock ; Other type available by customer requested																																																																																																											
CABLE	See page 2 ; Other type available by customer requested																																																																																																											
NOTE	<ol style="list-style-type: none"> 1. All parameters are specified at 230VAC input, rated load, 25°C/70% RH ambient. 2. DC voltage: The output voltage set at point measure by plug terminal & 50% load. 3. Ripple & noise are measured at 20MHz by using a 12" twisted pair terminated with a 0.1μf & 47μf capacitor. 4. Tolerance: includes set up tolerance, line regulation, load regulation. 5. Line regulation is measured from low line to high line at rated load. 6. The power supply is considered as an independent unit, but the final equipment still need to re-confirm that the whole system complies with the EMC directives. 7. Length of set up time is measured at first cold start. Turning ON/OFF the power supply may lead to increase of the set up time. 																																																																																																											

Mechanical Specification

Case No. 974A Unit:mm

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
 Http://www.100y.com.tw

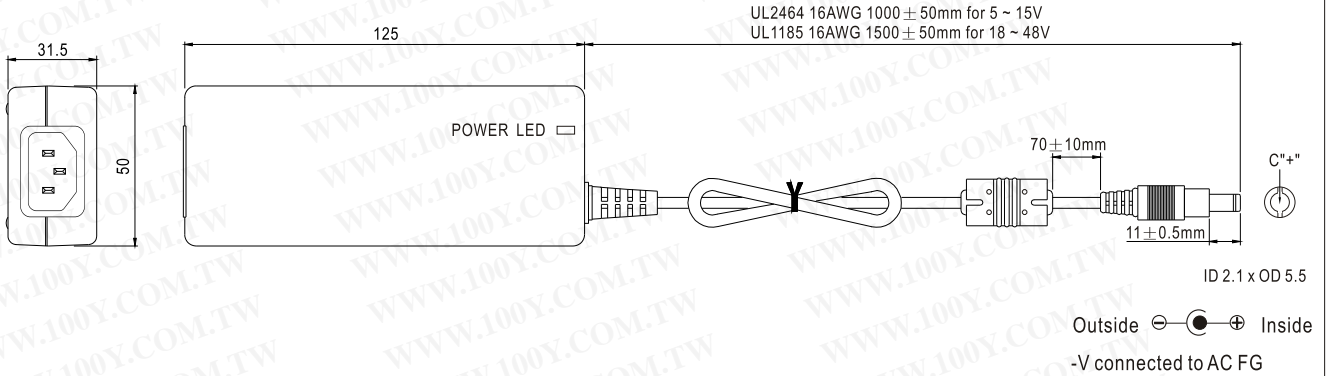


Plug Assignment

Standard plug: P1J

P1J	
P/N	OUTPUT
CENTER	+

Derating Curve

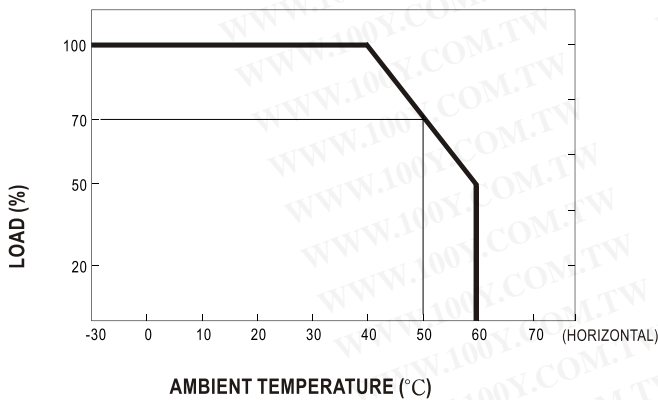

Static Characteristics

