



■ Features :

- 2"x1" compact size
- 2:1 wide input range
- High efficiency up to 92%
- 1500VDC I/O isolation
- Built-in remote ON/OFF control
- Built-in trimming output
- Comply with CE / FCC without external components
- Protections: Short circuit / Overload / Input and Output Over voltage
- Cooling by free air convection
- Six-sided shield metal case
- 100% burn-in test
- Low cost / High reliability
- Approvals: FCC / CE
- 2 years warranty


勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
Http://www.100y.com.tw



SPECIFICATION

ORDER NO.	SKM50B-05	SKM50C-05	SKM50B-12	SKM50C-12	SKM50B-15	SKM50C-15
OUTPUT	DC VOLTAGE	5V	12V	15V		
	CURRENT RANGE	1 ~ 10A	0.41 ~ 4.17A	0.33 ~ 3.33A		
	RATED POWER	50W				
	RIPPLE & NOISE (max.) Note.2	60mVp-p	80mVp-p	100mVp-p		
	LINE REGULATION Note.3	±0.2%				
	LOAD REGULATION Note.4	±0.5%				
	VOLTAGE ACCURACY	±2.0%				
	SWITCHING FREQUENCY	300kHz typ.				
	EXTERNAL CAPACITANCE LOAD (max.)	1000uF				
INPUT	EXTERNAL TRIM Adj. RANGE(Typ.)	±10%	-20 ~ +10%	-20 ~ +10%		
	VOLTAGE RANGE	B: 18 ~ 36VDC C: 36 ~ 75VDC				
	UNDER VOLTAGE SHUTDOWN	B: 16VDC C: 32VDC				
	EFFICIENCY (Typ.)	91%	92%	91%	90%	91%
	DC CURRENT	Full load	2300mA	1160mA	2300mA	1160mA
		No load	110mA	60mA	110mA	60mA
	FILTER	Pi network				
	REMOTE CONTROL	Power ON : R.C ~ -Vin > 2.5VDC or open circuit ; Power OFF : R.C ~ -Vin < 0.5VDC or short				
	PROTECTION	Fuse recommended				
PROTECTION (Note. 5)	OVER CURRENT	110% ~ 180% rated output power				
		Protection type : Hiccup mode, recovers automatically after fault condition is removed				
	SHORT CIRCUIT	All output equipped with short circuit				
OVER VOLTAGE		Protection type : Hiccup mode, recovers automatically after fault condition is removed				
	Input(Typ.)	B: >40 ~ 50VDC C: >80 ~ 100VDC input voltage				
	Output(Typ.)	5Vo : 7V ~ 8.95V ; 12Vo : 15V ~ 19.2V ; 15Vo : 18V ~ 23.3V				
ENVIRONMENT	WORKING TEMP.	-40 ~ +75°C (Refer to "Derating Curve")				
	CASE TEMP.	+115°C max.				
	WORKING HUMIDITY	20% ~ 90% RH non-condensing				
	STORAGE TEMP., HUMIDITY	-55 ~ +125°C, 10 ~ 95% RH				
	TEMP. COEFFICIENT	±0.03% / °C (0 ~ 55°C)				
	VIBRATION	10 ~ 500Hz, 2G 10min./1cycle, period for 60min. each along X, Y, Z axes				
	WITHSTAND VOLTAGE	I/P-O/P: 1.5KVDC				
SAFETY & EMC	ISOLATION RESISTANCE	I/P-O/P: 100M Ohms / 500VDC / 25°C / 70% RH				
	EMC EMISSION Note.5	Compliance to EN55022 Class A, FCC part 15 Class A without external components				
	EMC IMMUNITY	Compliance to EN61000-4-2, 3, 4, 5, 6, 8, light industry level, criteria A				
OTHERS	MTBF	700Khrs min. MIL-HDBK-217F(25°C)				
	DIMENSION	50.8*25.4*13.7 mm or 2"×1"×0.54" inch (L*W*H)				
	WEIGHT	43g				


■ Mechanical Specification

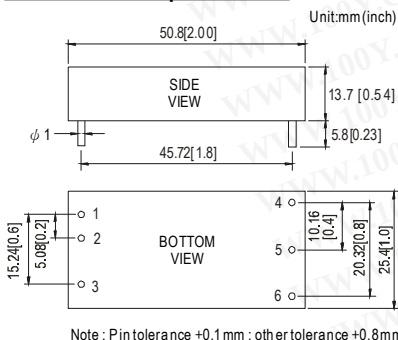


■ Pin Configuration

Pin No.	Output	Pin No.	Output
1	+Vin	4	+Vout
2	-Vin	5	-Vout
3	R.C	6	Trim

■ External Output Trimming

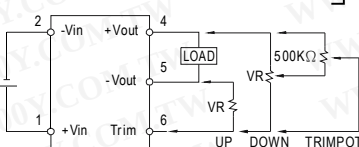

■ Derating Curve

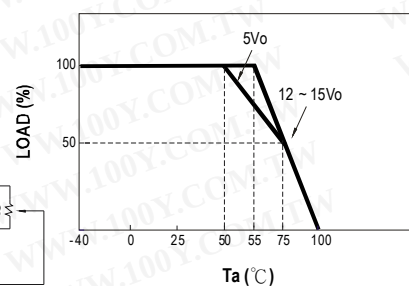

NOTE

- 1.All parameters are specified at normal input, rated load, 25°C 70% RH ambient.
- 2.Ripple & noise are measured at 20MHz by using a 12" twisted pair terminated with a 0.1uF & 47uF capacitor.
- 3.Line regulation is measured from low line to high line at rated load.
- 4.Load regulation is measured from 10% to 100% rated load.
- 5.Consult MEAN WELL for deployment of Class B.
- 6.Please prevent the converter from operating in overload or short circuit condition for more than 30 seconds.