

Compact AC-DC PCB-Mount Power Supplies

Features

- ◆ Small size and lightweight
- ◆ PC Board Mountable
- ◆ -10 to +70 °C Continuous Operation
- ◆ 85 - 265VAC Wide Range Input
- ◆ World-wide Agency Approvals
UL, CSA, TUV and CE Mark
- ◆ Convection Cooled
- ◆ Low Noise Conducted EMI Class B
- ◆ No external components needed



Not recommended for new designs

Specifications		5V	12V	15V	±12V	±15V
AC Input		85-265VAC 47-440Hz				
DC Input	VDC	110-340VDC				
Efficiency (typical)	%	73	76	76	73	73
Inrush Current Limiting (1)	A	5 & 10W: 15/30A, 15W: 20/40A				
Conducted EMI	-	FCC20780 class B, VDE0871 Class B, VCCI-2 (with external cap).				
Output Voltage Accuracy	%	± 5% (fixed)				
Line Regulation	%	0.4%				
Load Regulation	%	0.8%				
Ripple and Noise (pk-pk)	mV	120			150	
Hold-up Time (typical)	ms	17ms				
Overvoltage Protection (typical)	%	~110% (zener clamp)				
Overload Protection	-	~125% (avoid prolonged operation in overload)				
Cooling	-	Convection				
Operating Temperature	-	-10°C to 70°C, derate linearly to 25% load from 50°C to 70°C				
Humidity	%RH	20% to 90% RH (non-condensing)				
Isolation	VAC	Input to output: 3kVAC; Input to Case: 2kVAC; Output to Case: 500VAC				
Mounting	-	PC board mountable				
Safety Agency Approval	-	UL60950-1; CSA 22.2 No. 60950-1-03; EN60950-1 & CE Mark (LVD)				
Weight	g	5W: 75, 10W: 100, 15W: 150				
Warranty	-	1 year				

Notes:

(1) 100/200VAC @ 25°C

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Output Ratings

Model	Voltage (V)	Power (W)	Current (A)
Single Output			
KWS5-5	5V	5	1.00
KWS10-5	5V	10	2.00
KWS15-5	5V	15	3.00
KWS5-12	12V	5	0.45
KWS10-12	12V	10	0.90
KWS15-12	12V	15	1.30
KWS5-15	15V	5	0.35
KWS10-15	15V	10	0.70
KWS15-15	15V	15	1.00
Dual Output			
KWD5-1212	±12V	5	±0.22
KWD10-1212	±12V	10	±0.45
KWD15-1212	±12V	15	±0.65
KWD5-1515	±15V	5	±0.18
KWD10-1515	±15V	10	±0.36
KWD15-1515	±15V	15	±0.52


PIN Out Table

PIN	Function
FG	Case (Frame Ground)
AC(N)	AC Neutral
AC(L)	AC Line
-V	Negative Voltage Out
+V	Positive Voltage Out
COM	Output common

Other Industrial Products

KPSA	5 to 15W Open frame PCB mount single output
HWS	15 to 1800W Single output
ZWS	5 to 240W Single output, universal input
KM	15 to 40W, Single, dual & triple outputs

KW Outline Drawing

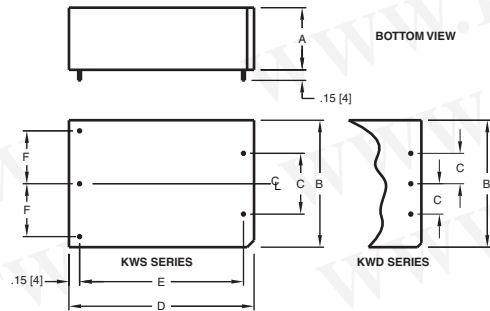

DIMENSIONS:

MODEL	A	B	C	D	E	F
KWS5	.807 (20.5)	1.77 (45.0)	.787 (20.0)	2.16 (55.0)	1.850 (47.0)	.688 (17.5)
KWS10	.807 (20.5)	1.77 (45.0)	.787 (20.0)	2.52 (64.0)	2.125 (54.0)	.688 (17.5)
KWS15	.925 (23.5)	1.889 (48.0)	.905 (23.0)	2.75 (70.0)	2.440 (62.0)	.767 (20.0)
KWD5	.807 (20.5)	1.77 (45.0)	.393 (10.0)	2.16 (55.0)	1.850 (47.0)	.688 (17.5)
KWD10	.807 (20.5)	1.77 (45.0)	.393 (10.0)	2.52 (64.0)	2.125 (54.0)	.688 (17.5)
KWD15	.925 (23.5)	1.889 (48.0)	.453 (11.5)	2.75 (70.0)	2.440 (62.0)	.767 (20.0)

WEIGHT:

MODEL	GRAMS
KWS5	75
KWS10	100
KWS15	150
KWD5	75
KWD10	100
KWD15	150

NOTE:
1. DIMENSIONS ARE IN INCHES
EXCEPT DIMENSIONS () ARE IN MM.
2. PIN: 5x .039 (1.0).

KWD5/KWD10/KWD15
KWS5/KWS10/KWS15

For Additional Information, please visit
www.tdk-lambda.com/lp/products/kw-series.htm



Not recommended for new designs

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)